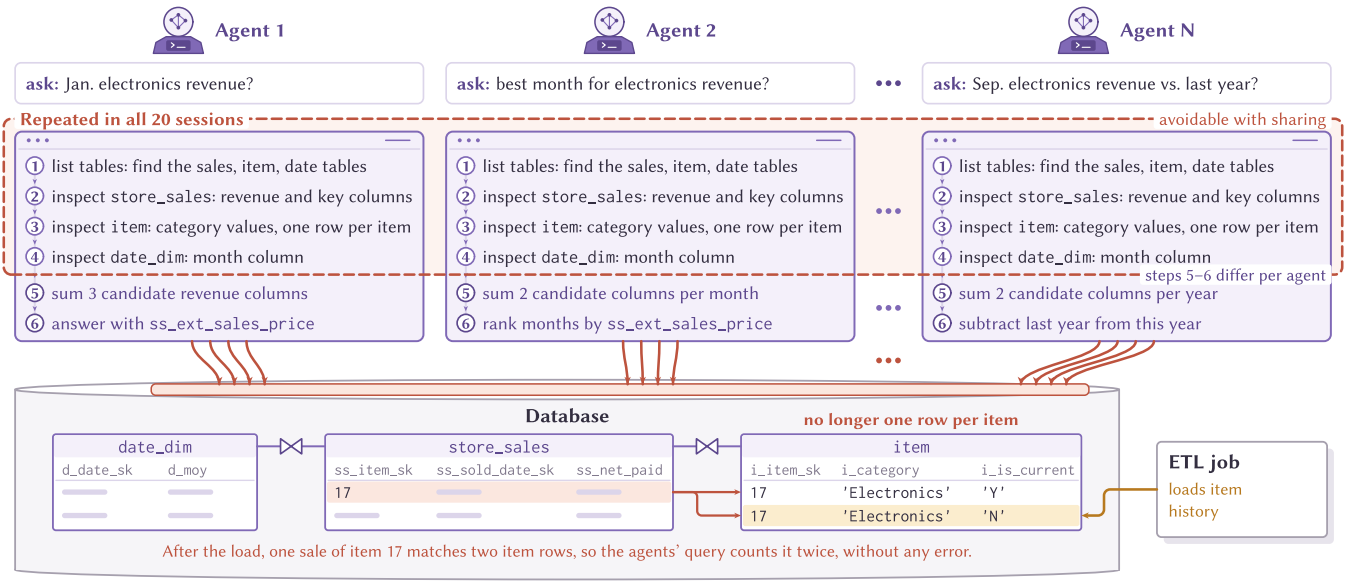

Agent 1
Agent 2
Agent N
ask: Jan. electronics revenue?
ask: best month for electronics revenue?
ask: Sep. electronics revenue vs. last year?
Repeated in all 20 sessions
avoidable with sharing
① list tables: find the sales, item, date tables
② inspect store_sales: revenue and key columns
③ inspect item: category values, one row per item
④ inspect date_dim: month column
⑤ sum 3 candidate revenue columns
⑥ answer with ss_ext_sales_price
① list tables: find the sales, item, date tables
② inspect store_sales: revenue and key columns
③ inspect item: category values, one row per item
④ inspect date_dim: month column
⑤ sum 2 candidate columns per month
⑥ rank months by ss_ext_sales_price
① list tables: find the sales, item, date tables
② inspect store_sales: revenue and key columns
③ inspect item: category values, one row per item
④ inspect date_dim: month column
steps 5–6 differ per agent
⑤ sum 2 candidate columns per year
⑥ subtract last year from this year
Database
no longer one row per item
date_dim
d_date_sk
d_moy
store_sales
ss_item_sk
ss_sold_date_sk
ss_net_paid
17
item
i_item_sk
i_category
i_is_current
17
'Electronics'
'Y'
17
'Electronics'
'N'
ETL job
loads item history
After the load, one sale of item 17 matches two item rows, so the agents' query counts it twice, without any error.