

The diagram illustrates the relationship between Definitions, Conditions, and the number of reruns for different data sources.

Definitions:

- Store returns** (5 orange squares): amount, tax, fee, ...
- Return ratios** (3 orange squares): return rate, ...
- Store sales** (5 gray squares): revenue, profit, ...
- Catalog sales** (4 gray squares): revenue, shipping, ...

Conditions:

- Grain** store_returns(ticket, item)
- Time** store_returns → date_dim
- Join** store_sales → store_returns
- Grain** store_sales(ticket, item)
- Time** store_sales → date_dim
- Grain** catalog_sales(order, item)
- Time** catalog_sales → date_dim

Reruns:

- Definition-level reruns:** 19 checks (5 × 2 + 3 × 3)
- MAVRA runs:** 3 checks

The diagram illustrates the relationship between Definitions, Conditions, and the number of reruns for different data models. It is divided into three main sections: Definitions, Conditions, and a summary of reruns.

Definitions:

- Store returns** (orange box): amount, tax, fee, ... (5 orange squares)
- Return ratios** (orange box): return rate, ... (3 orange squares)
- Store sales** (gray box): revenue, profit, ... (5 gray squares)
- Catalog sales** (gray box): revenue, shipping, ... (4 gray squares)

Conditions:

- Grain** store_returns(ticket, item)
- Time** store_returns → date_dim
- Join** store_sales → store_returns
- Grain** store_sales(ticket, item)
- Time** store_sales → date_dim
- Grain** catalog_sales(order, item)
- Time** catalog_sales → date_dim

Reruns:

- Definition-level reruns:** 19 checks (14 orange squares, 5 gray squares)
- MAVRA runs:** 3 checks (3 blue squares)

The diagram also shows a flow from the Definitions section to the Conditions section, and a feedback loop from the Conditions section back to the Definitions section, labeled "update store_returns".

The diagram illustrates the relationship between Definitions, Conditions, and the number of reruns for different data sources.

Definitions:


- Store returns** (5 orange squares): amount, tax, fee, ...
- Return ratios** (3 orange squares): return rate, ...
- Store sales** (5 gray squares): revenue, profit, ...
- Catalog sales** (4 gray squares): revenue, shipping, ...

Conditions:

- Grain** store_returns(ticket, item)
- Time** store_returns → date_dim
- Join** store_sales → store_returns
- Grain** store_sales(ticket, item)
- Time** store_sales → date_dim
- Grain** catalog_sales(order, item)
- Time** catalog_sales → date_dim

Reruns:

- Definition-level reruns:** 19 checks (5 × 2 + 3 × 3)
- MAVRA runs:** 3 checks

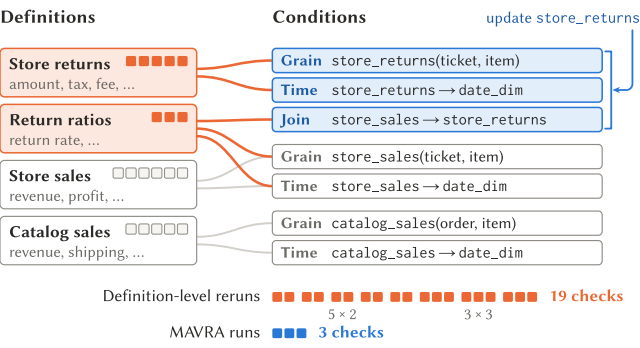

The diagram illustrates the relationship between Definitions, Conditions, and the number of reruns for different data sources.

Definitions:

- Store returns** (5 orange squares): amount, tax, fee, ...
- Return ratios** (3 orange squares): return rate, ...
- Store sales** (5 gray squares): revenue, profit, ...
- Catalog sales** (4 gray squares): revenue, shipping, ...

Conditions:

- Grain** store_returns(ticket, item)
- Time** store_returns → date_dim
- Join** store_sales → store_returns
- Grain** store_sales(ticket, item)
- Time** store_sales → date_dim
- Grain** catalog_sales(order, item)
- Time** catalog_sales → date_dim

Reruns:

- Definition-level reruns:** 19 checks (5 × 2 + 3 × 3)
- MAVRA runs:** 3 checks

The diagram illustrates the relationship between Definitions, Conditions, and the number of reruns for different data sources.

Definitions:

- Store returns** (5 orange squares): amount, tax, fee, ...
- Return ratios** (3 orange squares): return rate, ...
- Store sales** (5 gray squares): revenue, profit, ...
- Catalog sales** (4 gray squares): revenue, shipping, ...

Conditions:

- Grain** store_returns(ticket, item)
- Time** store_returns → date_dim
- Join** store_sales → store_returns
- Grain** store_sales(ticket, item)
- Time** store_sales → date_dim
- Grain** catalog_sales(order, item)
- Time** catalog_sales → date_dim

Reruns:

- Definition-level reruns:** 19 checks (5 × 2 + 3 × 3)
- MAVRA runs:** 3 checks

The diagram illustrates the relationship between Definitions, Conditions, and the number of reruns for different data sources.

Definitions:

- Store returns** (5 orange squares): amount, tax, fee, ...
- Return ratios** (3 orange squares): return rate, ...
- Store sales** (5 gray squares): revenue, profit, ...
- Catalog sales** (4 gray squares): revenue, shipping, ...

Conditions:

- Grain** store_returns(ticket, item)
- Time** store_returns → date_dim
- Join** store_sales → store_returns
- Grain** store_sales(ticket, item)
- Time** store_sales → date_dim
- Grain** catalog_sales(order, item)
- Time** catalog_sales → date_dim

Reruns:

- Definition-level reruns:** 19 checks (5 × 2 + 3 × 3)
- MAVRA runs:** 3 checks

The diagram illustrates the relationship between Definitions, Conditions, and the number of reruns for different data sources.

Definitions:

- Store returns** (5 orange squares): amount, tax, fee, ...
- Return ratios** (3 orange squares): return rate, ...
- Store sales** (5 gray squares): revenue, profit, ...
- Catalog sales** (4 gray squares): revenue, shipping, ...

Conditions:

- Grain** store_returns(ticket, item)
- Time** store_returns → date_dim
- Join** store_sales → store_returns
- Grain** store_sales(ticket, item)
- Time** store_sales → date_dim
- Grain** catalog_sales(order, item)
- Time** catalog_sales → date_dim

Reruns:

- Definition-level reruns:** 19 checks (5 × 2 + 3 × 3)
- MAVRA runs:** 3 checks