



UNIVERSITY of the
WESTERN CAPE



UNIVERSITEIT VAN PRETORIA
UNIVERSITY OF PRETORIA
YUNIBESITHI YA PRETORIA



UNIVERSITY OF
MPUMALANGA



UNIVERSITY OF
HOHENHEIM

UKUDLA Data Science Certificate

Reproducible Environments using `renv` & Docker

Markus Mößler

University of Hohenheim



UKUDLA

African German Centre

for Sustainable and Resilient Food
Systems and Applied Agricultural
and Food Data Science



science, technology
& innovation

Department:
Science, Technology and Innovation
REPUBLIC OF SOUTH AFRICA



National
Research
Foundation



Supported by:
Federal Foreign Office



With funding from the:
Federal Ministry
of Research, Technology
and Space



With support from
Federal Ministry
of Agriculture, Food
and Regional Identity



Deutscher Akademischer Austauschdienst
German Academic Exchange Service

by decision of the
German Bundestag

Table of contents

1. Motivation
2. Concepts
3. Application
4. Key Message

The reproducibility question

Can another learner


- run the analysis scripts?
- obtain the required packages?
- reproduce the same results?
- recreate the analysis next year?

Environments can differ

Learner A	Learner B
R 4.3.3	R 4.5.0
dplyr 1.1.4	dplyr 1.2.x
Ubuntu	Windows

Sharing code is necessary, but code alone does not describe the computational conditions under which it ran. “Works for me” is not yet a reproducibility strategy.

A computational environment has several layers

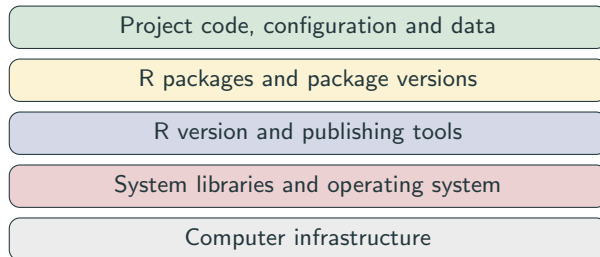

Isolation

Keep project dependencies separate.

Portability

Move work between computers.

Reproducibility

Recreate recorded conditions.

What does `renv` manage?

`renv` provides


- a project-local R package library;
- isolation from other projects;
- a record of package versions and sources; and
- tools to restore that state.

`renv` does not manage

- the complete operating system;
- all system libraries;
- hardware or external services; or
- the research workflow itself.

`renv.lock` is a machine-readable description of the project's R package environment and belongs in version control.

The renv workflow



- `snapshot()` updates the lockfile from the project library.
- `restore()` recreates the project library from the lockfile.
- Review lockfile changes before committing them.
- A shared project can be initialized once and restored by collaborators.

What does a container add?

A container packages


- an operating-system user space;
- system libraries and tools;
- R and publishing tools;
- project dependencies; and
- a default working context.

A container shares

- the host computer's kernel;
- host hardware and resources;
- explicitly mounted files; and
- configured network access.

Containers provide stronger environment isolation than a project package library, but are lighter than a complete virtual machine.

Dockerfile, image and container




- The Dockerfile describes how to construct an image.
- The image is an immutable snapshot that can be used repeatedly.
- Each container is a running instance created from that image.
- Rebuild after changing the Dockerfile or copied source code.

Containers are disposable; results must persist



- A container's writable layer normally disappears with the container.
- Bind mounts expose selected host directories inside the container.
- Inputs can be read and outputs written back to the host.
- Mount only what the analysis needs.

Two tools manage different layers

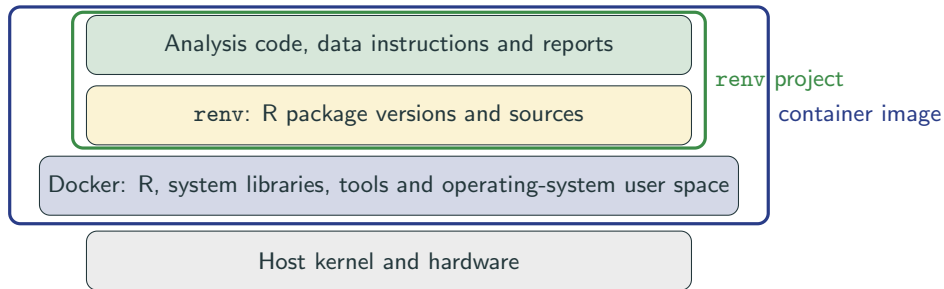

`renv` records the R package layer. Docker records a broader execution environment. Together they provide complementary reproducibility information.

Run one analysis reproducibly across contexts

Method	Environment	Typical use
Local batch	Host R with restored <code>renv</code> library	Run the complete workflow
Local interactive	RStudio or terminal R with <code>renv</code>	Develop and inspect
Docker batch	Image in a temporary container	Run a consistent environment
Docker interactive	Shell or R inside the container	Inspect the container context



Key message: record every relevant environment layer

Environment tools can help recreate

- package versions;
- language and system tools;
- execution commands; and
- a consistent working context.

They cannot guarantee

- correct data or code;
- valid scientific assumptions;
- permanent external sources; or
- responsible interpretation.

`renv` records R packages; Docker records a broader environment. Together with Git, documented data, and a reproducible workflow, they make an analysis easier to recreate and inspect.

Detailed setup, repository, workflow, and troubleshooting instructions are provided in the learning-module guides.

Supported by

South African government and the National Research Foundation



science, technology
& innovation

Department:
Science, Technology and Innovation
REPUBLIC OF SOUTH AFRICA



National
Research
Foundation

German government and the German Academic Exchange Service

Supported by:



Federal Foreign Office

With funding from the:



Federal Ministry
of Research, Technology
and Space

Supported by:



Federal Ministry
of Agriculture, Food
and Regional Identity

by decision of the
German Bundestag

Project Manager:



Federal Office
for Agriculture and Food



Deutscher Akademischer Austauschdienst
German Academic Exchange Service