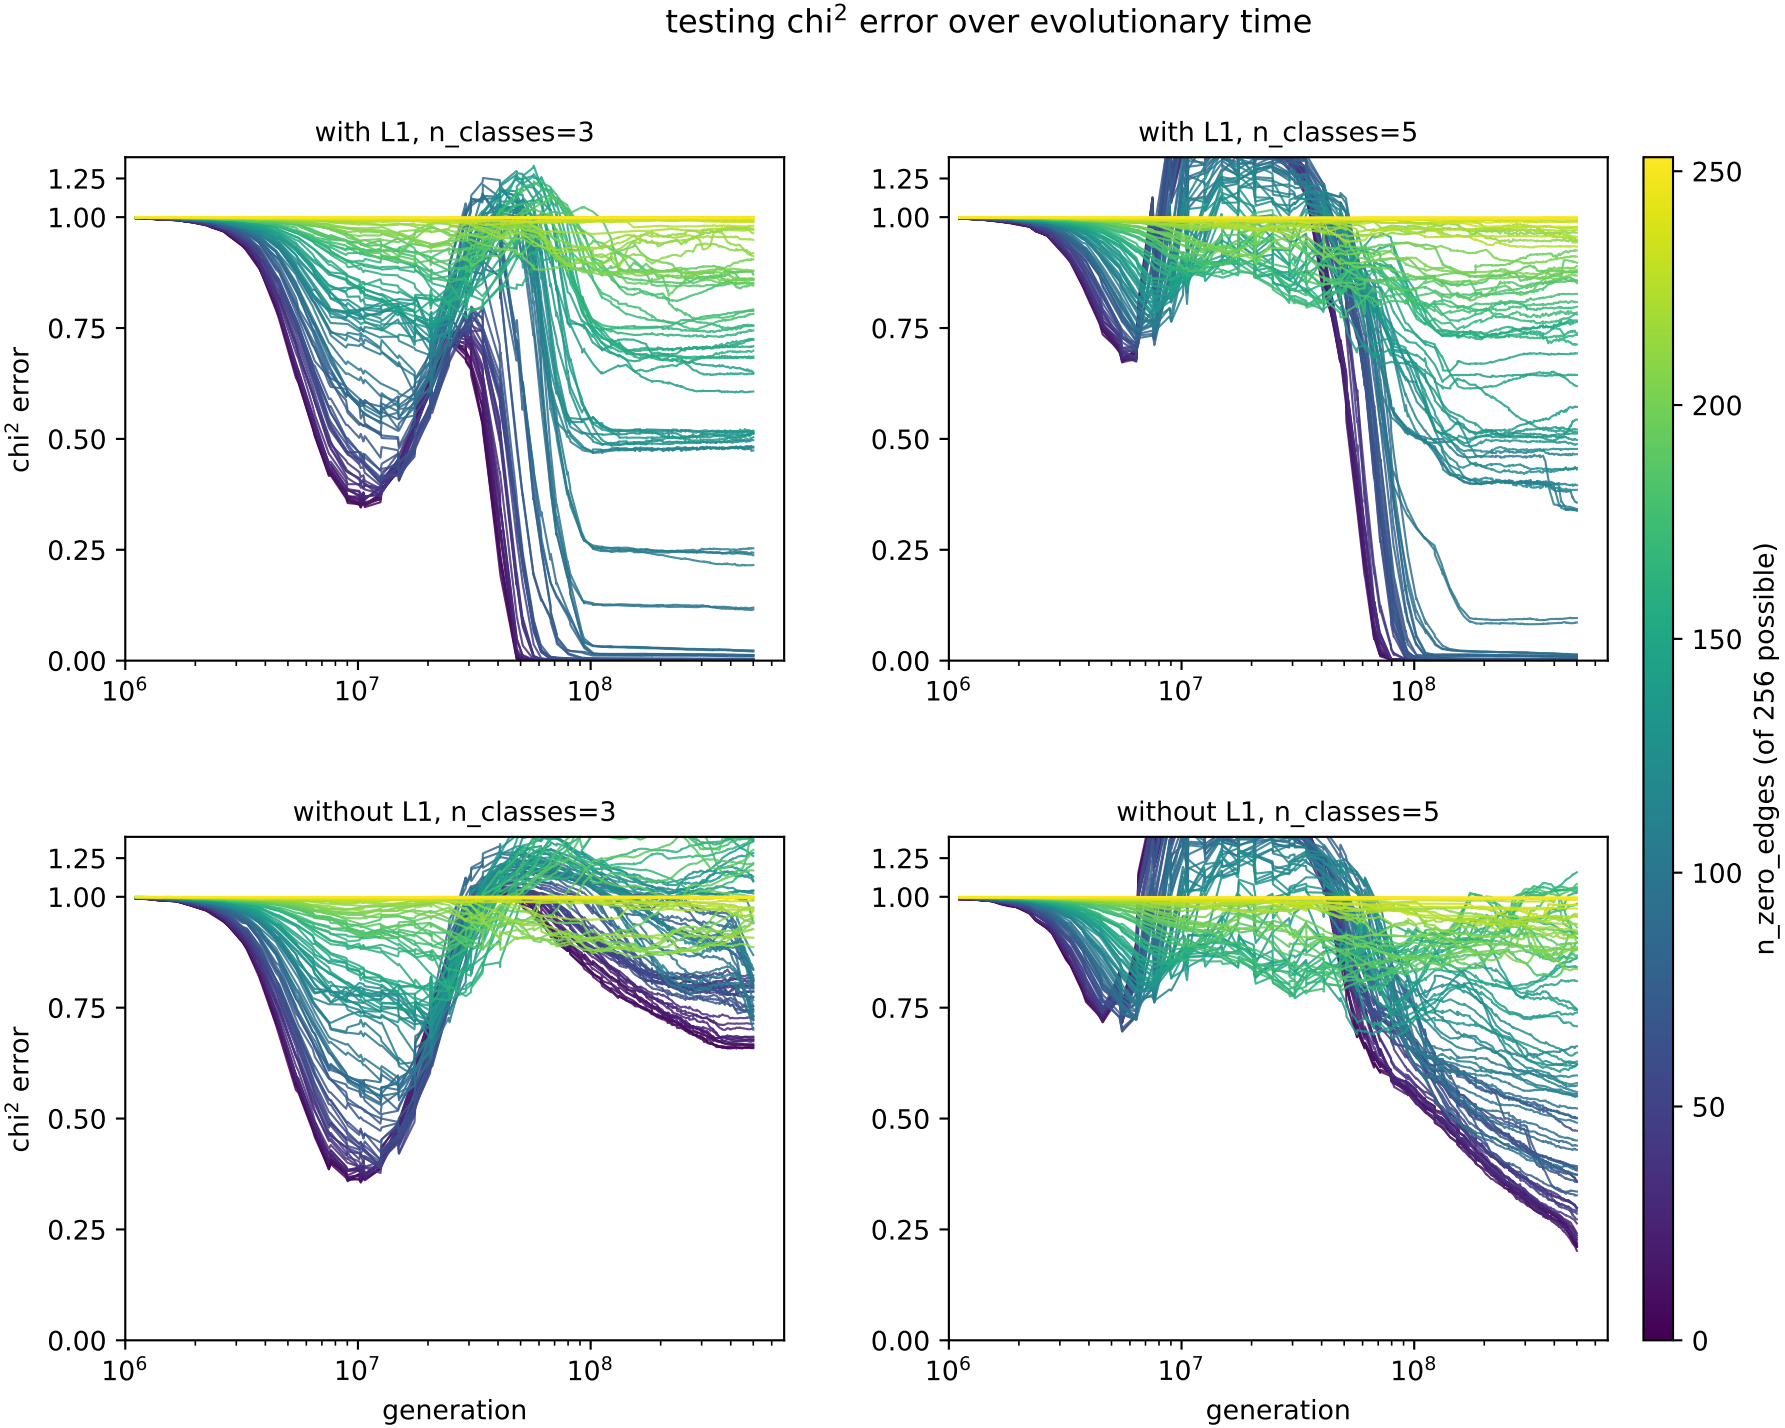
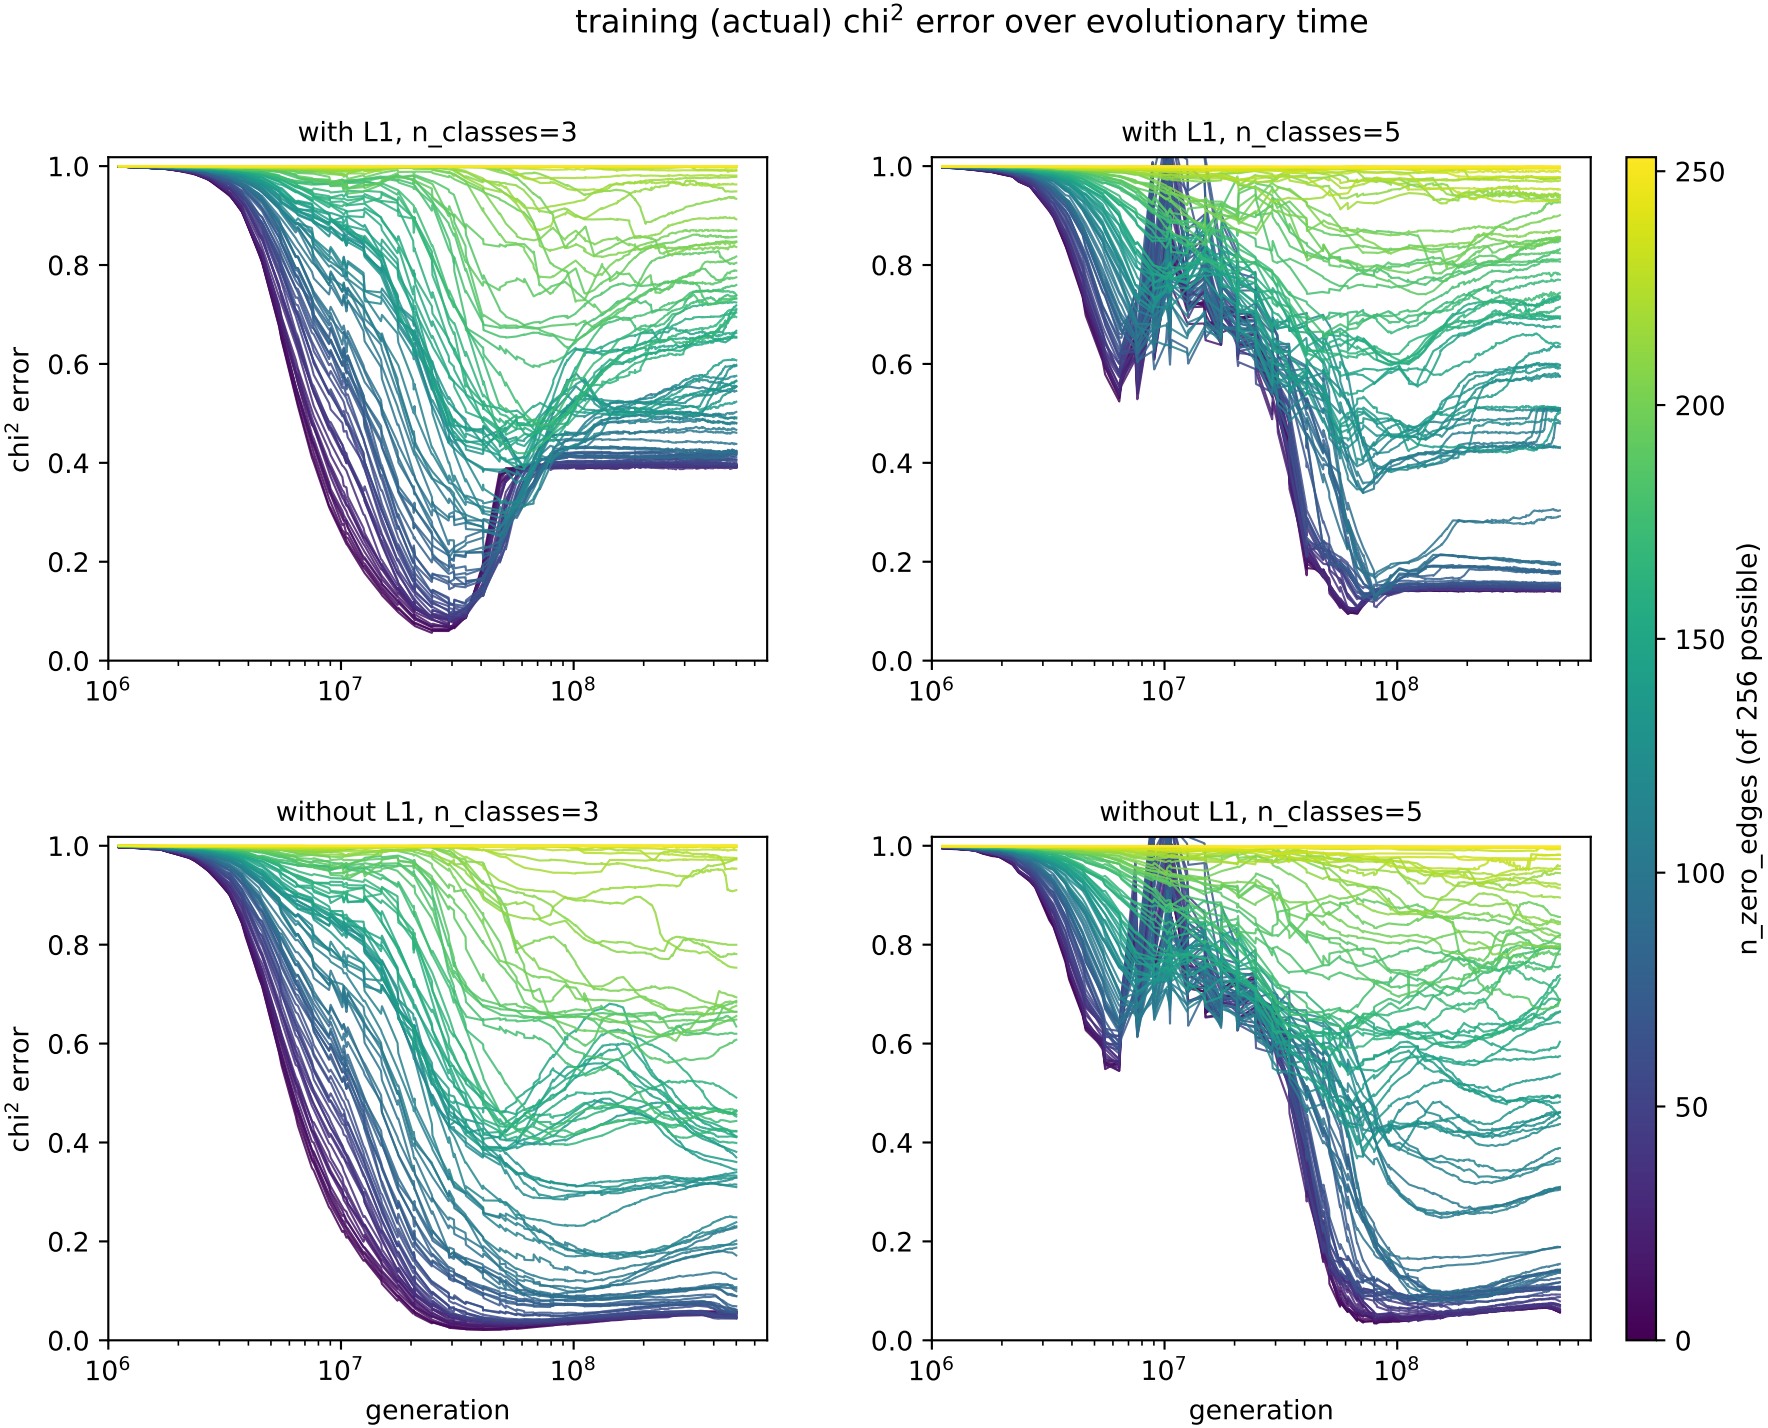
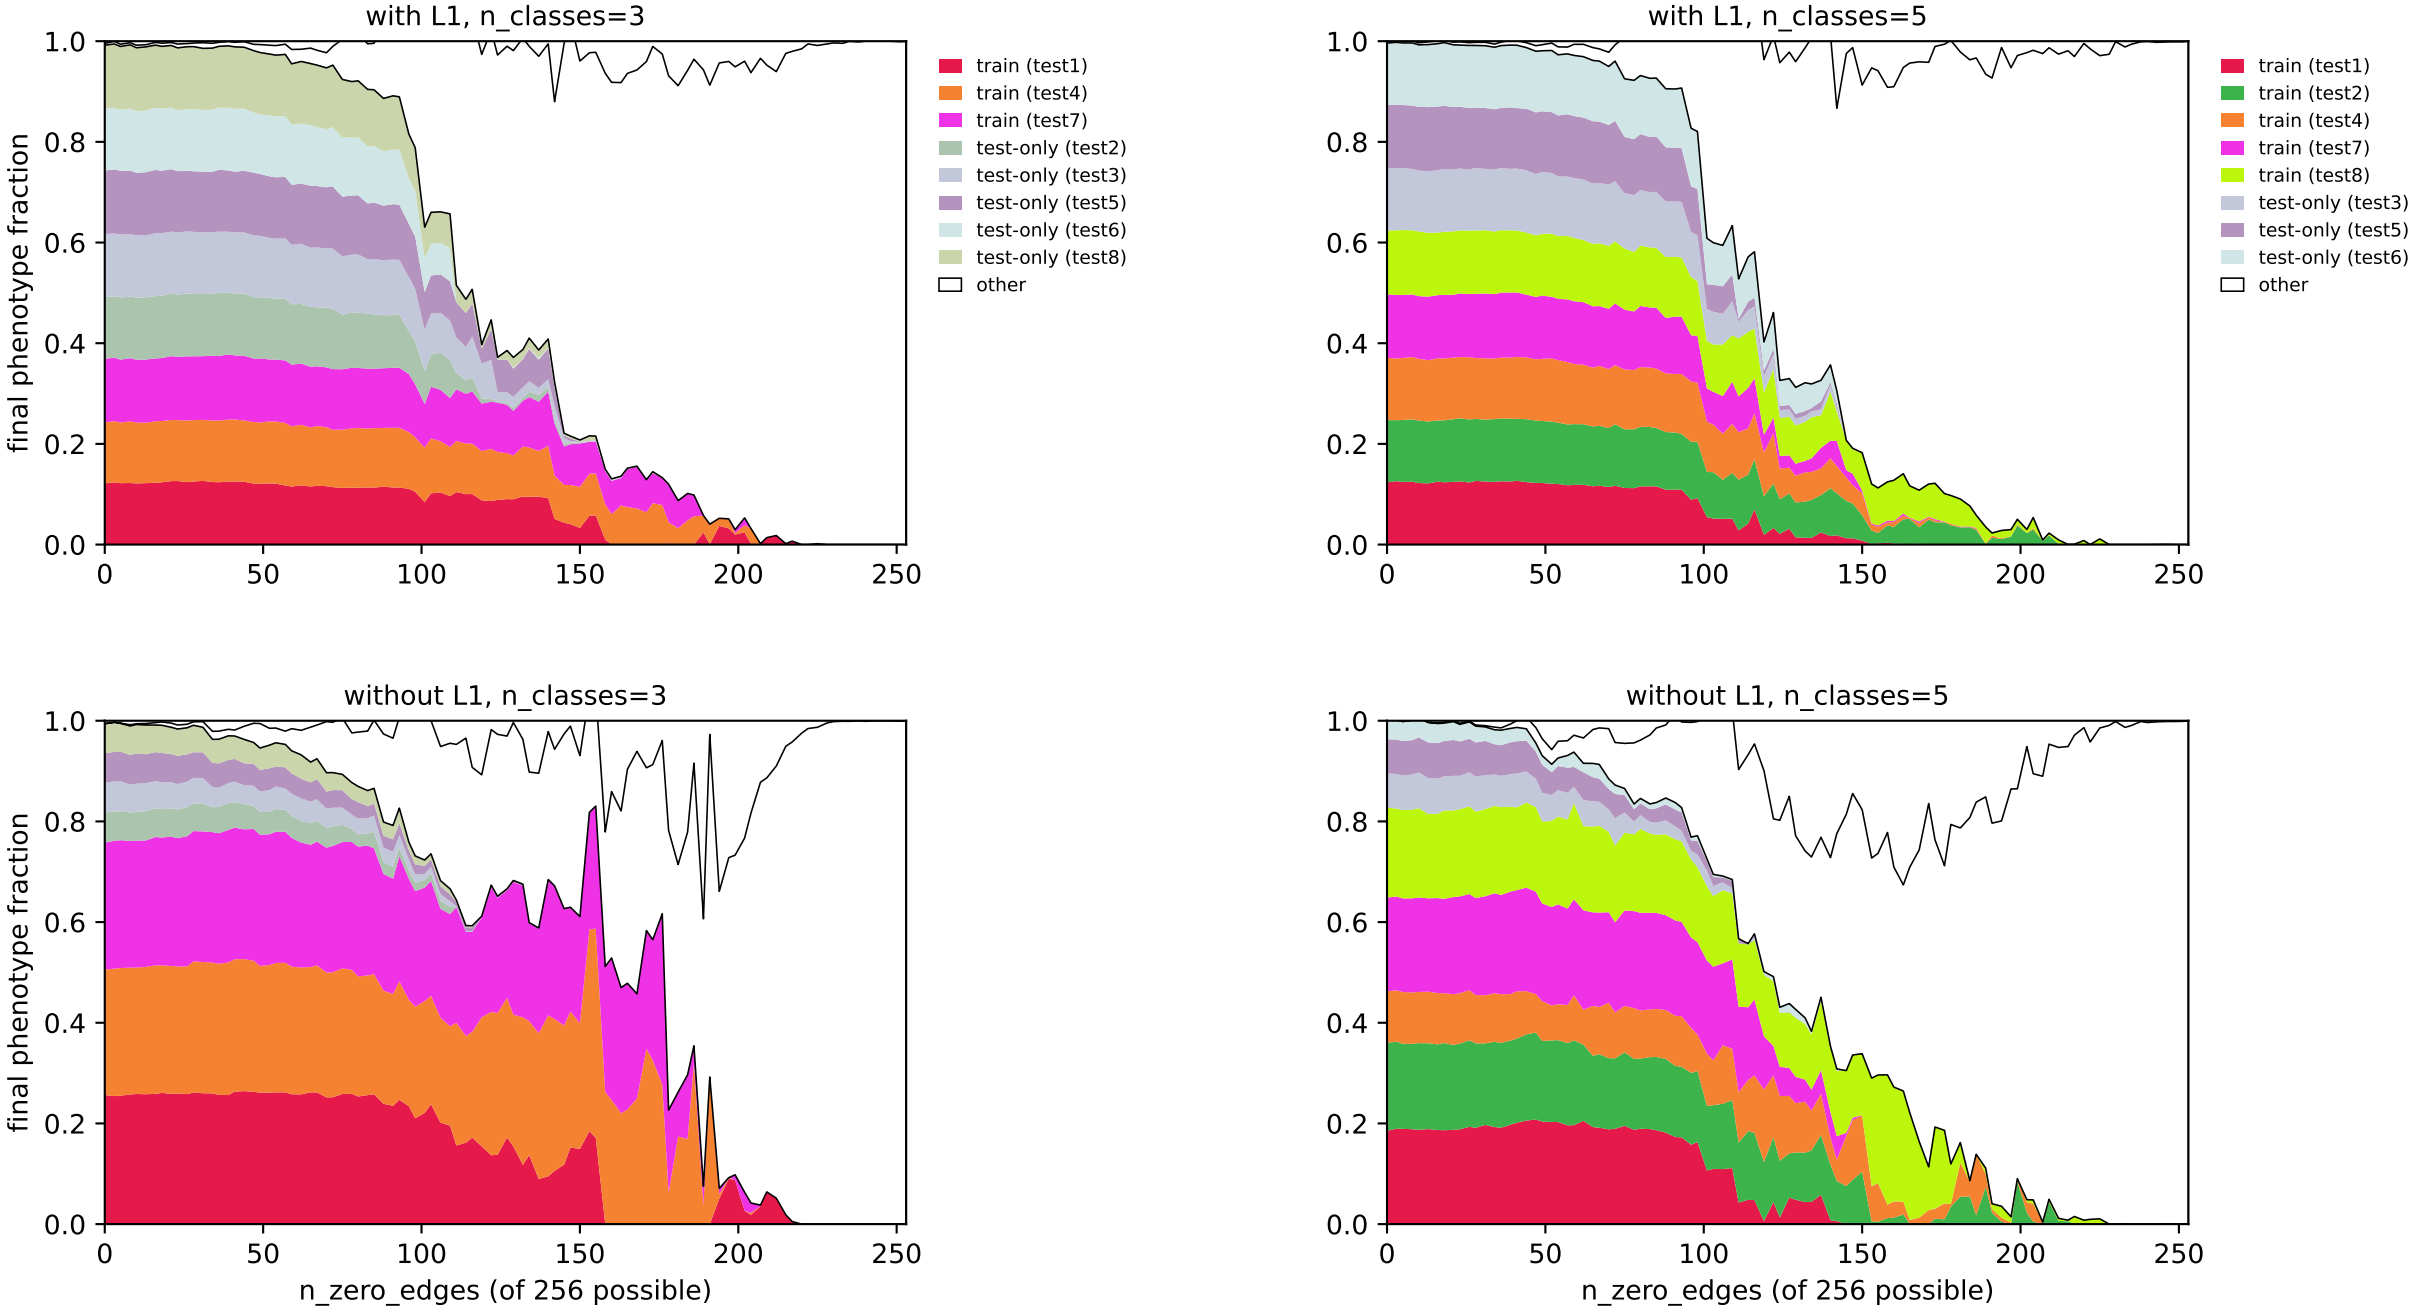
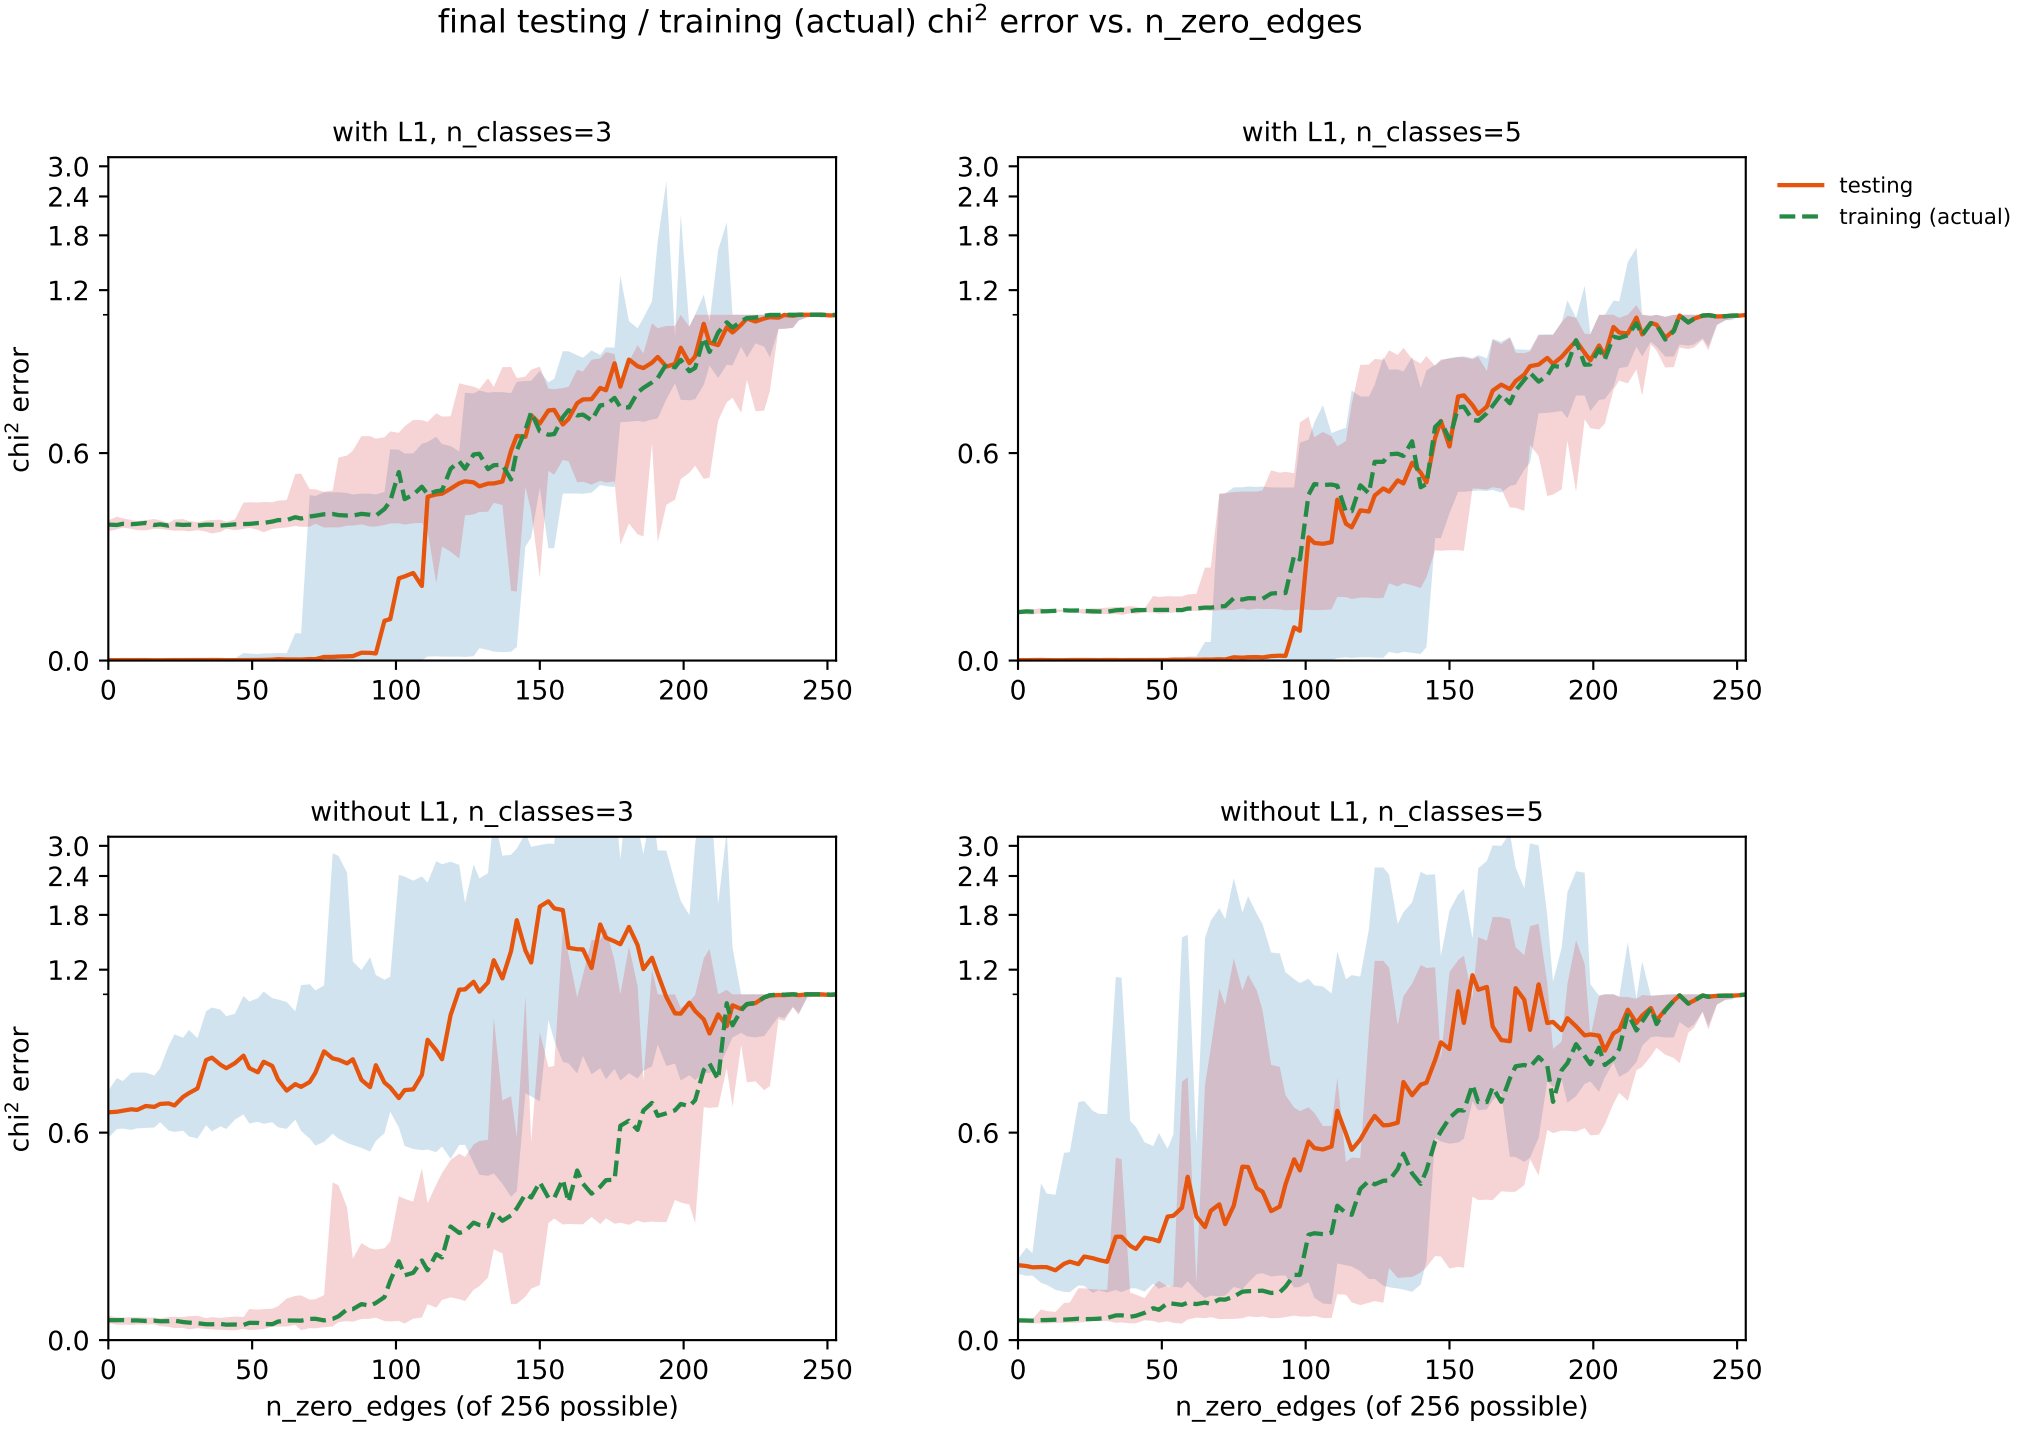

testing chi$^2$ error over evolutionary time
with L1, n_classes=3
with L1, n_classes=5
without L1, n_classes=3
without L1, n_classes=5
chi$^2$ error
generation
n_zero_edges (of 256 possible)
0.00
0.25
0.50
0.75
1.00
1.25
$10^6$
$10^7$
$10^8$
0
50
100
150
200
250


training (actual) chi$^2$ error over evolutionary time
with L1, n_classes=3
with L1, n_classes=5
without L1, n_classes=3
without L1, n_classes=5
chi$^2$ error
generation
n_zero_edges (of 256 possible)
0
50
100
150
200
250
0.0
0.2
0.4
0.6
0.8
1.0
$10^6$
$10^7$
$10^8$

# final phenotype composition vs. n_zero_edges




final testing / training (actual) chi$^2$ error vs. n_zero_edges
with L1, n_classes=3
with L1, n_classes=5
without L1, n_classes=3
without L1, n_classes=5
testing
training (actual)
chi$^2$ error
n_zero_edges (of 256 possible)
0.0
0.6
1.2
1.8
2.4
3.0
0
50
100
150
200
250