


“column”-based approach


memory
@ $t=7$



Step 3. shift
down data

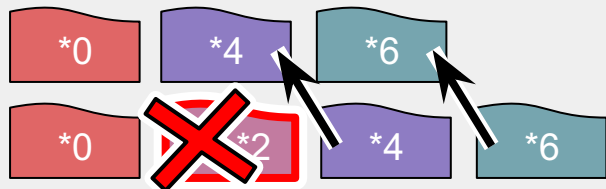

Step 2.
decode
indices' times

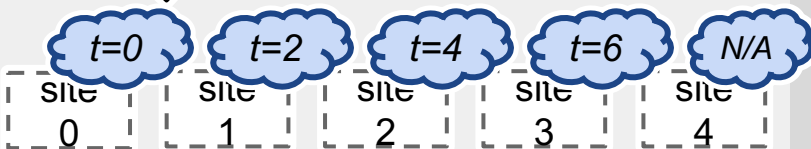

Step 1.
decide purged
time(s)



memory
@ $t=6$



“surface”-based approach



Step 1. decide placement site

$t=6 \Rightarrow \hat{f}_{(x)} \text{ policy algorithm} \Rightarrow \text{site 1}$

