


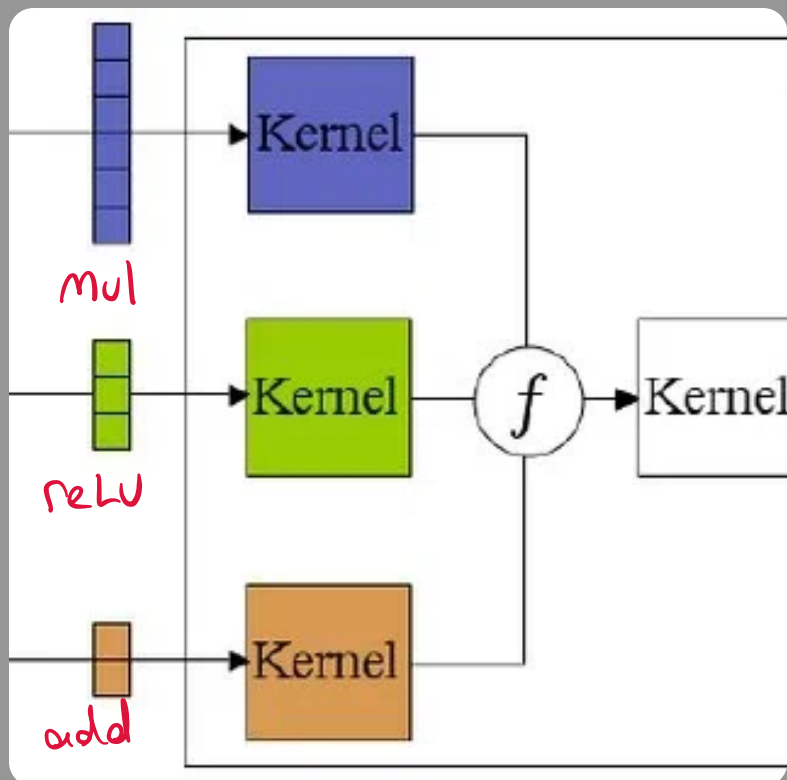

> each unfused kernel
makes its own
round trip to HBM

fusing keeps the intermediates
in registers,
so the data is loaded once
and stored once

↳ same math, one trip: 2.3x less
HBM traffic and
two intermediates that never exist.