

LDA_IGA-NTX

Sven Morlock

28/03/2022

§ 1

Load required packages:

```
library(ggplot2)
library(survival)
library(survminer)
library(xtable)
library(data.table)
library(readxl)
library(forcats)
library(lubridate)
library(dplyr)
```

Read data using read_data.R scrip:

```
source("read_data.R")
```

§ 2 EDA

§ 2.1 IGA

§ 3 Kaplan-Meier

```
follow_up <- years(10)
```

§ 3.1 IGA


```
# functions in survival and survminer package need numeric-type input
data_iga2[, time_date_biopsy := interval(`T-date`, `date of biopsy`) / years(1)]
data_iga2[, time_t_dls := interval(`T-dls`, `T-date`) / years(1)]
data_iga2[, time_date_birth := interval(`T-date`, `Date of birth`) / years(1)]
data_iga2[, time_graft_loss := interval(`T-date`, `graft loss date`) / years(1)]
data_iga2[, time_date_follow_up := interval(`T-date`, `T-date` + follow_up) / years(1)]
```

§ 3.1.1

- Event:
 - graft-loss within the follow up period.
- Censoring scheme:
 - if graft loss date after follow up period, censored by end of follow up.
 - if T-dls (date last seen) within follow up period, censored by T-dls.
- Time period:
 - 10 years after T-date (kidney transplantaion).

```
data_iga2 <- data_iga2 %>%
  mutate(censor_date = case_when(
    ## graft-loss within follow up period
    !is.na(`graft loss date`) & `graft loss date` < `T-date` + follow_up ~ time_graft_loss,
    ## graft-loss after follow up period
    !is.na(`graft loss date`) & `graft loss date` > `T-date` + follow_up ~ time_date_follow_up,
    ## no graft-loss and last seen within follow up
    is.na(`graft loss date`) & !is.na(`T-dls`) & `T-dls` < `T-date` + follow_up ~ time_t_dls,
    ## no graft-loss and last seen after follow up
    is.na(`graft loss date`) & !is.na(`T-dls`) & `T-dls` > `T-date` + follow_up ~ time_date_follow_up,
    ## no graft loss and no last seen
    is.na(`graft loss date`) & is.na(`T-dls`) ~ time_date_follow_up
  )
)
data_iga2 <- data_iga2 %>%
  mutate(event = case_when(
    ## graft-loss within follow up period
    !is.na(`graft loss date`) & `graft loss date` < `T-date` + follow_up ~ 1,
    ## else censored
    TRUE ~ 0,
  )
)
```

```
model_iga_1 <- survfit(formula = Surv(time = censor_date,
                                     event = event, type = "right") ~ 1,
                      data = data_iga2)
ggsurvplot(model_iga_1,
            conf.int = FALSE,
            cumevents = TRUE)
```

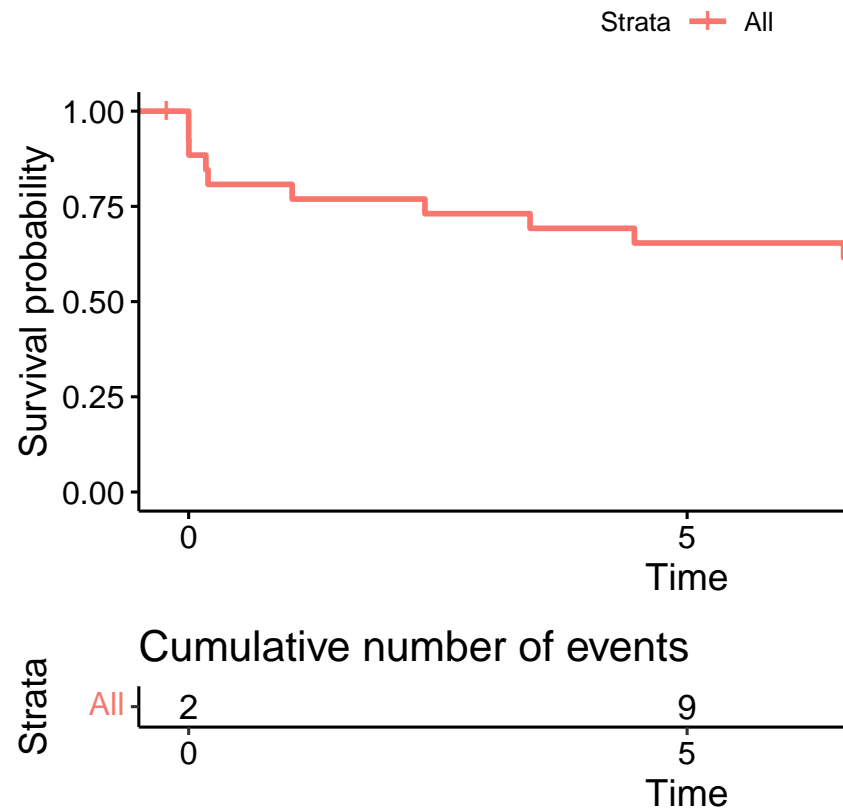

Overall kaplan-Meier curve (no stratification)

§ 3.1.2

- Event:
 - Pat death (0=alive, 1= dead) (patient death).
- Censoring scheme:
 - T-dls (date last seen) within follow up period.
- Time period:
 - 10 years after T-date (kidney transplantaion).