

```
# import header files
%matplotlib inline
import torch
import torch.nn as nn
import torchvision
from functools import partial
from dataclasses import dataclass
from collections import OrderedDict
import glob
import os
import random
import tensorflow as tf
from tensorflow import keras
import numpy as np
import seaborn as sn
import pandas as pd
from matplotlib import pyplot as plt
from tqdm import tqdm
from sklearn.metrics import confusion_matrix
from sklearn.metrics import precision_recall_fscore_support
import time
import copy
import tqdm
import torch
import random
from PIL import Image
import torch.optim as optim
from torchvision import models
import torch.nn.functional as F
import matplotlib.pyplot as plt
from torch.utils.data import TensorDataset, DataLoader
```

```
# load my google drive
def auth_gdrive():
    from google.colab import drive
    if os.path.exists('content/gdrive/My Drive'): return
    drive.mount('/content/gdrive')
def load_gdrive_dataset():
    loader_assets = 'MyPollen23E.zip'
    auth_gdrive()
```

```
# mount my google drive
from google.colab import drive
drive.mount('/content/gdrive', force_remount=True)
load_gdrive_dataset()
```

Mounted at /content/gdrive

Drive already mounted at /content/gdrive; to attempt to forcibly remount, call drive.mount("/content/gdrive", force_

```
# unzip dataset
!unzip "/content/gdrive/MyDrive/MyPollen23E.zip"
```

Streaming output truncated to the last 5000 lines.

```
inflating: MyPollen23E/train/19.Senegalia/aug_6_7972872.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_6_8620474.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_6_8820520.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_6_8859012.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_6_8932679.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_6_9433361.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_1245632.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_140328.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_1472246.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_1515079.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_1538732.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_1653100.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_244923.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_3006255.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_3324648.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_40061.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_4670492.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_4840063.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_5069623.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_5097255.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_5503850.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_5657213.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_6057843.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_6206002.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_6780688.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_8158468.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_8232553.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_9312966.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_7_9565478.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_1011373.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_1378149.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_1735145.jpg
```

inflating: MyPollen23E/train/19.Senegalia/aug_8_2167214.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_2667687.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_2889232.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_353352.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_3589098.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_3774324.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_3943075.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_4014634.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_4121616.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_4291301.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_4775783.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_5064325.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_6095463.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_6729982.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_7222306.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_7337562.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_8330930.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_8851505.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_8905521.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_8_9519352.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_9_1528241.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_9_1539311.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_9_1575454.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_9_1824833.jpg
inflating: MyPollen23E/train/19.Senegalia/aug_9_2051209.jpg

```
# Count the number of samples in the training set and test set
# training set
train_class_1 = os.listdir("/content/MyPollen23E/train/1.Anadenanthera/")
train_class_1_samples = len(train_class_1)
print("The number of samples in the train_class_1 is:", train_class_1_samples)
train_class_2 = os.listdir("/content/MyPollen23E/train/2.Arecaceae/")
train_class_2_samples = len(train_class_2)
print("The number of samples in the train_class_2 is:", train_class_2_samples)
train_class_3 = os.listdir("/content/MyPollen23E/train/3.Arrabidaea/")
train_class_3_samples = len(train_class_3)
print("The number of samples in the train_class_3 is:", train_class_3_samples)
train_class_4 = os.listdir("/content/MyPollen23E/train/4.Cecropia/")
train_class_4_samples = len(train_class_4)
print("The number of samples in the train_class_4 is:", train_class_4_samples)
train_class_5 = os.listdir("/content/MyPollen23E/train/5.Chromolaena/")
train_class_5_samples = len(train_class_5)
print("The number of samples in the train_class_5 is:", train_class_5_samples)
train_class_6 = os.listdir("/content/MyPollen23E/train/6.Combretum/")
train_class_6_samples = len(train_class_6)
print("The number of samples in the train_class_6 is:", train_class_6_samples)
train_class_7 = os.listdir("/content/MyPollen23E/train/7.Croton/")
train_class_7_samples = len(train_class_7)
print("The number of samples in the train_class_7 is:", train_class_7_samples)
train_class_8 = os.listdir("/content/MyPollen23E/train/8.Dipteryx/")
train_class_8_samples = len(train_class_8)
print("The number of samples in the train_class_8 is:", train_class_8_samples)
train_class_9 = os.listdir("/content/MyPollen23E/train/9.Eucalipto/")
train_class_9_samples = len(train_class_9)
print("The number of samples in the train_class_9 is:", train_class_9_samples)
train_class_10 = os.listdir("/content/MyPollen23E/train/10.Faramea/")
train_class_10_samples = len(train_class_10)
print("The number of samples in the train_class_10 is:", train_class_10_samples)
train_class_11 = os.listdir("/content/MyPollen23E/train/11.Hyptis/")
train_class_11_samples = len(train_class_11)
print("The number of samples in the train_class_11 is:", train_class_11_samples)
train_class_12 = os.listdir("/content/MyPollen23E/train/12.Mabea/")
train_class_12_samples = len(train_class_12)
print("The number of samples in the train_class_12 is:", train_class_12_samples)
train_class_13 = os.listdir("/content/MyPollen23E/train/13.Matayba/")
train_class_13_samples = len(train_class_13)
print("The number of samples in the train_class_13 is:", train_class_13_samples)
train_class_14 = os.listdir("/content/MyPollen23E/train/14.Mimosa/")
train_class_14_samples = len(train_class_14)
print("The number of samples in the train_class_14 is:", train_class_14_samples)
train_class_15 = os.listdir("/content/MyPollen23E/train/15.Myrcia/")
train_class_15_samples = len(train_class_15)
print("The number of samples in the train_class_15 is:", train_class_15_samples)
train_class_16 = os.listdir("/content/MyPollen23E/train/16.Protium/")
train_class_16_samples = len(train_class_16)
print("The number of samples in the train_class_16 is:", train_class_16_samples)
train_class_17 = os.listdir("/content/MyPollen23E/train/17.Qualea/")
train_class_17_samples = len(train_class_17)
print("The number of samples in the train_class_17 is:", train_class_17_samples)
train_class_18 = os.listdir("/content/MyPollen23E/train/18.Schinus/")
train_class_18_samples = len(train_class_18)
print("The number of samples in the train_class_18 is:", train_class_18_samples)
train_class_19 = os.listdir("/content/MyPollen23E/train/19.Senegalia/")
train_class_19_samples = len(train_class_19)
print("The number of samples in the train_class_19 is:", train_class_19_samples)
train_class_20 = os.listdir("/content/MyPollen23E/train/20.Serjania/")
train_class_20_samples = len(train_class_20)
print("The number of samples in the train_class_20 is:", train_class_20_samples)
train_class_21 = os.listdir("/content/MyPollen23E/train/21.Syagrus/")
train_class_21_samples = len(train_class_21)
```

```
train_class_21_samples = len(train_class_21)
print("The number of samples in the train_class_21 is:", train_class_21_samples)
train_class_22 = os.listdir("/content/MyPollen23E/train/22.Tridax/")
train_class_22_samples = len(train_class_22)
print("The number of samples in the train_class_22 is:", train_class_22_samples)
train_class_23 = os.listdir("/content/MyPollen23E/train/23.Urochloa/")
train_class_23_samples = len(train_class_23)
print("The number of samples in the train_class_23 is:", train_class_23_samples)

number_trainingset = len(train_class_1+train_class_2+train_class_3+train_class_4+train_class_5+train_class_6+train_class_7
                          +train_class_8+train_class_9+train_class_10+train_class_11+train_class_12+train_class_13+train_class_14
                          +train_class_15+train_class_16+train_class_17+train_class_18+train_class_19+train_class_20+train_class_21
                          +train_class_22+train_class_23)
print("\n""The number of samples in the training set is:", number_trainingset)
# test set
test_class_1 = os.listdir("/content/MyPollen23E/test/1.Anadenanthera/")
test_class_1_samples = len(test_class_1)
print("\n""The number of samples in the test_class_1 is:", test_class_1_samples)
test_class_2 = os.listdir("/content/MyPollen23E/test/2.Arecaceae/")
test_class_2_samples = len(test_class_2)
print("The number of samples in the test_class_2 is:", test_class_2_samples)
test_class_3 = os.listdir("/content/MyPollen23E/test/3.Arrabidaea/")
test_class_3_samples = len(test_class_3)
print("The number of samples in the test_class_3 is:", test_class_3_samples)
test_class_4 = os.listdir("/content/MyPollen23E/test/4.Cecropia/")
test_class_4_samples = len(test_class_4)
print("The number of samples in the test_class_4 is:", test_class_4_samples)
test_class_5 = os.listdir("/content/MyPollen23E/test/5.Chromolaena/")
test_class_5_samples = len(test_class_5)
print("The number of samples in the test_class_5 is:", test_class_5_samples)
test_class_6 = os.listdir("/content/MyPollen23E/test/6.Combretum/")
test_class_6_samples = len(test_class_6)
print("The number of samples in the test_class_6 is:", test_class_6_samples)
test_class_7 = os.listdir("/content/MyPollen23E/test/7.Croton/")
test_class_7_samples = len(test_class_7)
print("The number of samples in the test_class_7 is:", test_class_7_samples)
test_class_8 = os.listdir("/content/MyPollen23E/test/8.Dipteryx/")
test_class_8_samples = len(test_class_8)
print("The number of samples in the test_class_8 is:", test_class_8_samples)
test_class_9 = os.listdir("/content/MyPollen23E/test/9.Eucalipto/")
test_class_9_samples = len(test_class_9)
print("The number of samples in the test_class_9 is:", test_class_9_samples)
test_class_10 = os.listdir("/content/MyPollen23E/test/10.Faramea/")
test_class_10_samples = len(test_class_10)
print("The number of samples in the test_class_10 is:", test_class_10_samples)
test_class_11 = os.listdir("/content/MyPollen23E/test/11.Hyptis/")
test_class_11_samples = len(test_class_11)
print("The number of samples in the test_class_11 is:", test_class_11_samples)
test_class_12 = os.listdir("/content/MyPollen23E/test/12.Mabea/")
test_class_12_samples = len(test_class_12)
print("The number of samples in the test_class_12 is:", test_class_12_samples)
test_class_13 = os.listdir("/content/MyPollen23E/test/13.Matayba/")
test_class_13_samples = len(test_class_13)
print("The number of samples in the test_class_13 is:", test_class_13_samples)
test_class_14 = os.listdir("/content/MyPollen23E/test/14.Mimosa/")
test_class_14_samples = len(test_class_14)
print("The number of samples in the test_class_14 is:", test_class_14_samples)
test_class_15 = os.listdir("/content/MyPollen23E/test/15.Myrcia/")
test_class_15_samples = len(test_class_15)
print("The number of samples in the test_class_15 is:", test_class_15_samples)
test_class_16 = os.listdir("/content/MyPollen23E/test/16.Protium/")
test_class_16_samples = len(test_class_16)
print("The number of samples in the test_class_16 is:", test_class_16_samples)
test_class_17 = os.listdir("/content/MyPollen23E/test/17.Qualea/")
test_class_17_samples = len(test_class_17)
print("The number of samples in the test_class_17 is:", test_class_17_samples)
test_class_18 = os.listdir("/content/MyPollen23E/test/18.Schinus/")
test_class_18_samples = len(test_class_18)
print("The number of samples in the test_class_18 is:", test_class_18_samples)
test_class_19 = os.listdir("/content/MyPollen23E/test/19.Senegalia/")
test_class_19_samples = len(test_class_19)
print("The number of samples in the test_class_19 is:", test_class_19_samples)
test_class_20 = os.listdir("/content/MyPollen23E/test/20.Serjania/")
test_class_20_samples = len(test_class_20)
print("The number of samples in the test_class_20 is:", test_class_20_samples)
test_class_21 = os.listdir("/content/MyPollen23E/test/21.Syagrus/")
test_class_21_samples = len(test_class_21)
print("The number of samples in the testclass_21 is:", test_class_21_samples)
test_class_22 = os.listdir("/content/MyPollen23E/test/22.Tridax/")
test_class_22_samples = len(test_class_22)
print("The number of samples in the ttest_class_22 is:", test_class_22_samples)
test_class_23 = os.listdir("/content/MyPollen23E/test/23.Urochloa/")
test_class_23_samples = len(test_class_23)
print("The number of samples in the test_class_23 is:", test_class_23_samples)
number_testset = len(test_class_1+test_class_2+test_class_3+test_class_4+test_class_5+test_class_6+test_class_7
                     +test_class_8+test_class_9+test_class_10+test_class_11+test_class_12+test_class_13+test_class_14
                     +test_class_15+test_class_16+test_class_17+test_class_18+test_class_19+test_class_20+test_class_21
                     +test_class_22+test_class_23)
print("\n""The number of samples in the test set is:", number_testset)
```

The number of samples in the train_class_1 is: 400

The number of samples in the train_class_2 is: 408
The number of samples in the train_class_3 is: 408
The number of samples in the train_class_4 is: 408
The number of samples in the train_class_5 is: 408
The number of samples in the train_class_6 is: 408
The number of samples in the train_class_7 is: 408
The number of samples in the train_class_8 is: 408
The number of samples in the train_class_9 is: 408
The number of samples in the train_class_10 is: 408
The number of samples in the train_class_11 is: 408
The number of samples in the train_class_12 is: 408
The number of samples in the train_class_13 is: 408
The number of samples in the train_class_14 is: 408
The number of samples in the train_class_15 is: 408
The number of samples in the train_class_16 is: 408
The number of samples in the train_class_17 is: 408
The number of samples in the train_class_18 is: 408
The number of samples in the train_class_19 is: 408
The number of samples in the train_class_20 is: 408
The number of samples in the train_class_21 is: 408
The number of samples in the train_class_22 is: 408
The number of samples in the train_class_23 is: 408

The number of samples in the training set is: 9376

The number of samples in the test_class_1 is: 10
The number of samples in the test_class_2 is: 18
The number of samples in the test_class_3 is: 18
The number of samples in the test_class_4 is: 18
The number of samples in the test_class_5 is: 18
The number of samples in the test_class_6 is: 18
The number of samples in the test_class_7 is: 18
The number of samples in the test_class_8 is: 18
The number of samples in the test_class_9 is: 18
The number of samples in the test_class_10 is: 18
The number of samples in the test_class_11 is: 18
The number of samples in the test_class_12 is: 18
The number of samples in the test_class_13 is: 18
The number of samples in the test_class_14 is: 18
The number of samples in the test_class_15 is: 18
The number of samples in the test_class_16 is: 18
The number of samples in the test_class_17 is: 18
The number of samples in the test_class_18 is: 18
The number of samples in the test_class_19 is: 18
The number of samples in the test_class_20 is: 18
The number of samples in the testclass_21 is: 18
The number of samples in the ttest_class_22 is: 18
The number of samples in the test_class_23 is: 18

The number of samples in the test set is: 406


```
# define transforms
train_transforms = torchvision.transforms.Compose([torchvision.transforms.RandomRotation(30),
                                                    torchvision.transforms.Resize((84, 84)),
                                                    torchvision.transforms.RandomHorizontalFlip(),
                                                    torchvision.transforms.ToTensor(),
                                                    torchvision.transforms.Normalize([0.485, 0.456, 0.406], [0.229, 0.224, 0.225])])
```


```
# get data
train_data = torchvision.datasets.ImageFolder("/content/MyPollen23E/train/", transform=train_transforms)
test_data = torchvision.datasets.ImageFolder("/content/MyPollen23E/test/", transform=train_transforms)
```

```
# data loader
trainloader = torch.utils.data.DataLoader(train_data, batch_size=16, shuffle=True, num_workers=1, pin_memory=True)
testloader = torch.utils.data.DataLoader(test_data, batch_size=16, shuffle=True, num_workers=1, pin_memory=True)
```

```
# Create a list of our detection classes
classes = ["1", "2", "3", "4","5", "6", "7", "8", "9", "10", "11", "12","13", "14", "15", "16", "17", "18", "19", "20", "21", "22", "23"]
# plot random a batch images
from torchvision.utils import make_grid
def show_batch(dl, classes):
    for data, labels in dl:
        fig, ax = plt.subplots(figsize=(32, 16))
        ax.set_xticks([]); ax.set_yticks([])
        ax.imshow(make_grid(data[:32], nrow=8).squeeze().permute(1, 2, 0).clamp(0,1))
        print('Labels: ', list(map(lambda l: classes[l], labels)))
        break
show_batch(trainloader, classes)
```

Labels: ['7', '10', '3', '14', '23', '1', '6', '1', '6', '22', '21', '8', '6', '13', '19', '13']

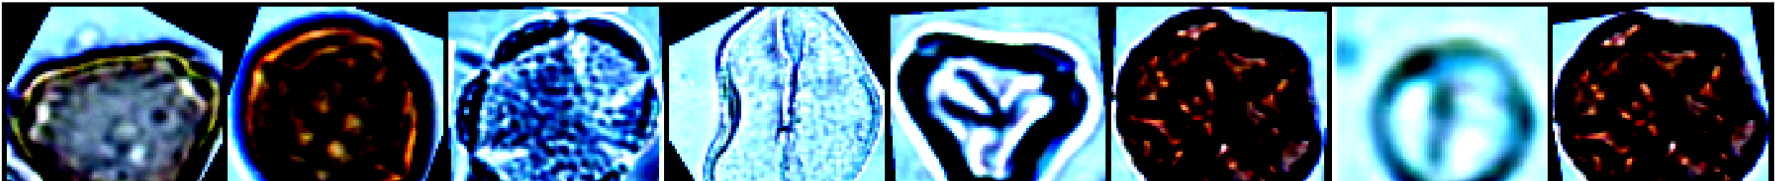

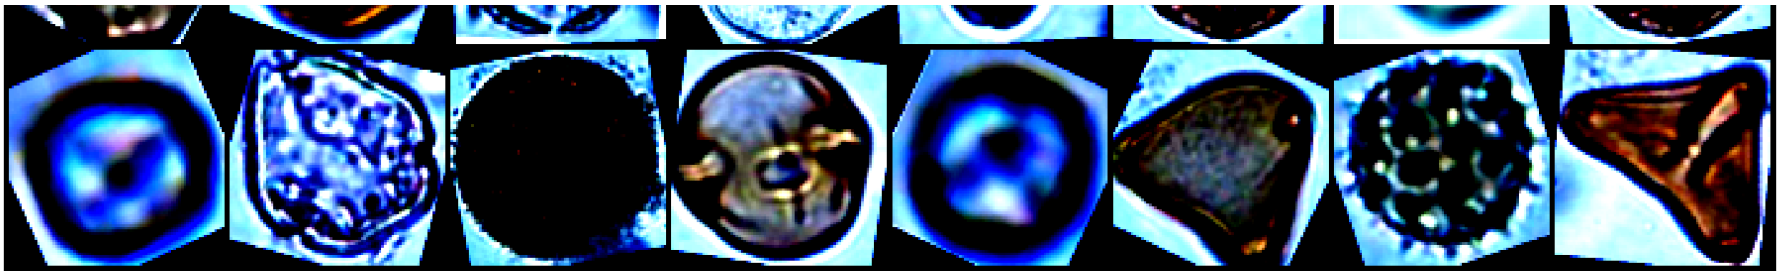

```
# define PVDAB
```

```
class ChannelAttention(nn.Module):
    def __init__(self, in_planes, ratio=16):
        super(ChannelAttention, self).__init__()
        self.avg_pool = nn.AdaptiveAvgPool2d(1)
        self.max_pool = nn.AdaptiveMaxPool2d(1)

        self.fc1 = nn.Conv2d(in_planes, in_planes // 16, 1, bias=False)
        self.relu1 = nn.ReLU()
        self.fc2 = nn.Conv2d(in_planes // 16, in_planes, 1, bias=False)

        self.sigmoid = nn.Sigmoid()

    def forward(self, x):
        avg_out = self.fc2(self.relu1(self.fc1(self.avg_pool(x))))
        max_out = self.fc2(self.relu1(self.fc1(self.max_pool(x))))
        out = avg_out + max_out
        return self.sigmoid(out)

class SpatialAttention(nn.Module):
    def __init__(self, kernel_size=3):
        super(SpatialAttention, self).__init__()

        assert kernel_size in (3, 7), 'kernel size must be 3 or 7'
        padding = 3 if kernel_size == 7 else 1

        self.conv1 = nn.Conv2d(2, 1, kernel_size, padding=padding, bias=False)
        self.sigmoid = nn.Sigmoid()

    def forward(self, x):
        avg_out = torch.mean(x, dim=1, keepdim=True)
        max_out, _ = torch.max(x, dim=1, keepdim=True)
        x = torch.cat([avg_out, max_out], dim=1)
        x = self.conv1(x)
        return self.sigmoid(x)

class PVDAB(nn.Module):
    def __init__(self, in_planes):
        super(PVDAB, self).__init__()

        self.ca = ChannelAttention(in_planes)
        self.sa = SpatialAttention()

    def forward(self, x):

        out = x * (self.ca(x))
        out = out * (self.sa(out))

        return out
```

```
# define the model
```

```
class BasicBlock(nn.Module):
    expansion = 1

    def __init__(self, in_planes, planes, stride=1):
        super(BasicBlock, self).__init__()
        self.conv1 = nn.Conv2d(in_planes, planes, kernel_size=3, stride=stride, padding=1, bias=False)
        self.bn1 = nn.BatchNorm2d(planes)
        self.conv2 = nn.Conv2d(planes, planes, kernel_size=3, stride=1, padding=1, bias=False)
        self.bn2 = nn.BatchNorm2d(planes)
        self.shortcut = nn.Sequential()
        if stride != 1 or in_planes != self.expansion*planes:
            self.shortcut = nn.Sequential(
                nn.Conv2d(in_planes, self.expansion*planes, kernel_size=1, stride=stride, bias=False),
                nn.BatchNorm2d(self.expansion*planes)
            )

        self.pvdab = PVDAB(planes)

    def forward(self, x):
        residual = x
        out = F.relu(self.bn1(self.conv1(x)))
        out = self.bn2(self.conv2(out))
        out += self.shortcut(out)
        out = F.relu(out)
```

```
        out = self.bn2(self.conv2(out))
        out = self.pvdab(out)
        out += self.shortcut(residual)
        out = F.relu(out)
        return out

class Bottleneck(nn.Module):
    expansion = 4

    def __init__(self, in_planes, planes, stride=1):
        super(Bottleneck, self).__init__()
        self.conv1 = nn.Conv2d(in_planes, planes, kernel_size=1, bias=False)
        self.bn1 = nn.BatchNorm2d(planes)
        self.conv2 = nn.Conv2d(planes, planes, kernel_size=3, stride=stride, padding=1, bias=False)
        self.bn2 = nn.BatchNorm2d(planes)
        self.conv3 = nn.Conv2d(planes, self.expansion*planes, kernel_size=1, bias=False)
        self.bn3 = nn.BatchNorm2d(self.expansion*planes)
        self.shortcut = nn.Sequential()
        if stride != 1 or in_planes != self.expansion*planes:
            self.shortcut = nn.Sequential(
                nn.Conv2d(in_planes, self.expansion*planes, kernel_size=1, stride=stride, bias=False),
                nn.BatchNorm2d(self.expansion*planes)
            )

        self.pvdab = PVDAB(self.expansion*planes)

    def forward(self, x):
        residual = x
        out = F.relu(self.bn1(self.conv1(x)))
        out = F.relu(self.bn2(self.conv2(out)))
        out = self.bn3(self.conv3(out))
        out = self.pvdab(out)
        out += self.shortcut(residual)
        out = F.relu(out)
        return out

class ResNetPVDAB(nn.Module):
    def __init__(self, block, num_blocks, num_classes=23):
        super(ResNetPVDAB, self).__init__()
        self.in_planes = 64

        self.conv1 = nn.Conv2d(3, 64, kernel_size=3, stride=1, padding=1, bias=False)
        self.bn1 = nn.BatchNorm2d(64)
        self.layer1 = self._make_layer(block, 64, num_blocks[0], stride=1)
        self.layer2 = self._make_layer(block, 128, num_blocks[1], stride=2)
        self.layer3 = self._make_layer(block, 256, num_blocks[2], stride=2)
        self.layer4 = self._make_layer(block, 512, num_blocks[3], stride=2)
        self.linear = nn.Linear(2048*block.expansion, num_classes)

    def _make_layer(self, block, planes, num_blocks, stride):
        strides = [stride] + [1]*(num_blocks-1)
        layers = []
        for stride in strides:
            layers.append(block(self.in_planes, planes, stride))
            self.in_planes = planes * block.expansion
        return nn.Sequential(*layers)

    def forward(self, x):
        out = F.relu(self.bn1(self.conv1(x)))
        out = self.layer1(out)
        out = self.layer2(out)
        out = self.layer3(out)
        out = self.layer4(out)
        out = F.avg_pool2d(out, 4)
        out = out.view(out.size(0), -1)
        out = self.linear(out)
        return out

def ResNet18PVDAB():
    return ResNetPVDAB(BasicBlock, [2,2,2,2])

def ResNet34PVDAB():
    return ResNetPVDAB(BasicBlock, [3,4,6,3])

def ResNet50PVDAB():
    return ResNetPVDAB(Bottleneck, [3,4,6,3])

def ResNet101PVDAB():
    return ResNetPVDAB(Bottleneck, [3,4,23,3])

def ResNet152PVDAB():
    return ResNetPVDAB(Bottleneck, [3,8,36,3])
```

```
# print the model
import math
device = torch.device("cuda" if torch.cuda.is_available() else "cpu")
model = ResNet18PVDAB()
```



```
model.to(device)

ResNetPVDAB(
  (conv1): Conv2d(3, 64, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1), bias=False)
  (bn1): BatchNorm2d(64, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
  (layer1): Sequential(
    (0): BasicBlock(
      (conv1): Conv2d(64, 64, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1), bias=False)
      (bn1): BatchNorm2d(64, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
      (conv2): Conv2d(64, 64, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1), bias=False)
      (bn2): BatchNorm2d(64, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
      (shortcut): Sequential()
      (pvdab): PVDAB(
        (ca): ChannelAttention(
          (avg_pool): AdaptiveAvgPool2d(output_size=1)
          (max_pool): AdaptiveMaxPool2d(output_size=1)
          (fc1): Conv2d(64, 4, kernel_size=(1, 1), stride=(1, 1), bias=False)
          (relu1): ReLU()
          (fc2): Conv2d(4, 64, kernel_size=(1, 1), stride=(1, 1), bias=False)
          (sigmoid): Sigmoid()
        )
        (sa): SpatialAttention(
          (conv1): Conv2d(2, 1, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1), bias=False)
          (sigmoid): Sigmoid()
        )
      )
    )
  )
  (1): BasicBlock(
    (conv1): Conv2d(64, 64, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1), bias=False)
    (bn1): BatchNorm2d(64, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
    (conv2): Conv2d(64, 64, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1), bias=False)
    (bn2): BatchNorm2d(64, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
    (shortcut): Sequential()
    (pvdab): PVDAB(
      (ca): ChannelAttention(
        (avg_pool): AdaptiveAvgPool2d(output_size=1)
        (max_pool): AdaptiveMaxPool2d(output_size=1)
        (fc1): Conv2d(64, 4, kernel_size=(1, 1), stride=(1, 1), bias=False)
        (relu1): ReLU()
        (fc2): Conv2d(4, 64, kernel_size=(1, 1), stride=(1, 1), bias=False)
        (sigmoid): Sigmoid()
      )
      (sa): SpatialAttention(
        (conv1): Conv2d(2, 1, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1), bias=False)
        (sigmoid): Sigmoid()
      )
    )
  )
)
(layer2): Sequential(
  (0): BasicBlock(
    (conv1): Conv2d(64, 128, kernel_size=(3, 3), stride=(2, 2), padding=(1, 1), bias=False)
    (bn1): BatchNorm2d(128, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
    (conv2): Conv2d(128, 128, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1), bias=False)
    (bn2): BatchNorm2d(128, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
    (shortcut): Sequential(
      (0): Conv2d(64, 128, kernel_size=(1, 1), stride=(2, 2), bias=False)
      (1): BatchNorm2d(128, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
    )
    (pvdab): PVDAB(

```

```
# print summary of the model
from torchvision import models
from torchsummary import summary
summary(model, (3, 84, 84))
```

Layer (type)	Output Shape	Param #
Conv2d-1	[-1, 64, 84, 84]	1,728
BatchNorm2d-2	[-1, 64, 84, 84]	128
Conv2d-3	[-1, 64, 84, 84]	36,864
BatchNorm2d-4	[-1, 64, 84, 84]	128
Conv2d-5	[-1, 64, 84, 84]	36,864
BatchNorm2d-6	[-1, 64, 84, 84]	128
AdaptiveAvgPool2d-7	[-1, 64, 1, 1]	0
Conv2d-8	[-1, 4, 1, 1]	256
ReLU-9	[-1, 4, 1, 1]	0
Conv2d-10	[-1, 64, 1, 1]	256
AdaptiveMaxPool2d-11	[-1, 64, 1, 1]	0
Conv2d-12	[-1, 4, 1, 1]	256
ReLU-13	[-1, 4, 1, 1]	0
Conv2d-14	[-1, 64, 1, 1]	256
Sigmoid-15	[-1, 64, 1, 1]	0
ChannelAttention-16	[-1, 64, 1, 1]	0
Conv2d-17	[-1, 1, 84, 84]	18
Sigmoid-18	[-1, 1, 84, 84]	0
SpatialAttention-19	[-1, 1, 84, 84]	0

PVDAB-20	[-1, 64, 84, 84]	0
BasicBlock-21	[-1, 64, 84, 84]	0
Conv2d-22	[-1, 64, 84, 84]	36,864
BatchNorm2d-23	[-1, 64, 84, 84]	128
Conv2d-24	[-1, 64, 84, 84]	36,864
BatchNorm2d-25	[-1, 64, 84, 84]	128
AdaptiveAvgPool2d-26	[-1, 64, 1, 1]	0
Conv2d-27	[-1, 4, 1, 1]	256
ReLU-28	[-1, 4, 1, 1]	0
Conv2d-29	[-1, 64, 1, 1]	256
AdaptiveMaxPool2d-30	[-1, 64, 1, 1]	0
Conv2d-31	[-1, 4, 1, 1]	256
ReLU-32	[-1, 4, 1, 1]	0
Conv2d-33	[-1, 64, 1, 1]	256
Sigmoid-34	[-1, 64, 1, 1]	0
ChannelAttention-35	[-1, 64, 1, 1]	0
Conv2d-36	[-1, 1, 84, 84]	18
Sigmoid-37	[-1, 1, 84, 84]	0
SpatialAttention-38	[-1, 1, 84, 84]	0
PVDAB-39	[-1, 64, 84, 84]	0
BasicBlock-40	[-1, 64, 84, 84]	0
Conv2d-41	[-1, 128, 42, 42]	73,728
BatchNorm2d-42	[-1, 128, 42, 42]	256
Conv2d-43	[-1, 128, 42, 42]	147,456
BatchNorm2d-44	[-1, 128, 42, 42]	256
AdaptiveAvgPool2d-45	[-1, 128, 1, 1]	0
Conv2d-46	[-1, 8, 1, 1]	1,024
ReLU-47	[-1, 8, 1, 1]	0
Conv2d-48	[-1, 128, 1, 1]	1,024
AdaptiveMaxPool2d-49	[-1, 128, 1, 1]	0
Conv2d-50	[-1, 8, 1, 1]	1,024
ReLU-51	[-1, 8, 1, 1]	0
Conv2d-52	[-1, 128, 1, 1]	1,024
Sigmoid-53	[-1, 128, 1, 1]	0
ChannelAttention-54	[-1, 128, 1, 1]	0
Conv2d-55	[-1, 1, 42, 42]	18

```
# loss function to be used
criterion = torch.nn.CrossEntropyLoss()
# optimizer to be used
optimizer = torch.optim.SGD(model.parameters(), lr=5e-3, momentum=0.9, weight_decay=5e-4)
```

```
# training process
from torch.utils.tensorboard import SummaryWriter
train_losses = 0.0
train_accuracy = 0
epochs = 50
for epoch in range(epochs): # loop over the dataset multiple times
    print('Epoch-{}'.format(epoch + 1, optimizer.param_groups[0]['lr']))
    for i, data in enumerate(trainloader, 0):
        inputs, labels = data # get the inputs; data is a list of [inputs, labels]
        inputs, labels = inputs.cuda(), labels.cuda() # for using data in GPU
        optimizer.zero_grad() # zero the parameter gradients
        outputs = model(inputs) # forward
        loss = criterion(outputs, labels) # calculate loss
        loss.backward() # backward loss
        optimizer.step() # optimize gradients
        train_losses += loss.item() # save loss
        _, preds = torch.max(outputs, 1) # save prediction
        train_accuracy += torch.sum(preds == labels.data) # save train_accuracy
    if i % 1000 == 999: # every 1000 mini-batches...
        steps = epoch * len(trainloader) + i # calculate steps
        batch = i*batch_size # calculate batch
        print("Training loss {:.5} Training Accuracy {:.5} Steps: {}".format(train_losses / batch, train_accuracy/batch, steps))
        # Save train_accuracy and loss to Tensorboard
        writer.add_scalar('Training loss by steps', train_losses / batch, steps)
        writer.add_scalar('Training accuracy by steps', train_accuracy / batch, steps)
print("Training Accuracy: {}/{} ({:.5} %) Training Loss: {:.5}".format(train_accuracy, len(trainloader), 100. * train_accuracy / len(trainloader), train_losses))
train_losses = 0.0
train_accuracy = 0
print('Train is finished...')
```

Epoch-1:
Training Accuracy: 6271/586 (66.884 %) Training Loss: 0.063718
Epoch-2:
Training Accuracy: 8428/586 (89.889 %) Training Loss: 0.018722
Epoch-3:
Training Accuracy: 8939/586 (95.339 %) Training Loss: 0.0094393
Epoch-4:
Training Accuracy: 9118/586 (97.248 %) Training Loss: 0.0056778
Epoch-5:
Training Accuracy: 9176/586 (97.867 %) Training Loss: 0.0041456
Epoch-6:
Training Accuracy: 9217/586 (98.304 %) Training Loss: 0.0035477
Epoch-7:
Training Accuracy: 9272/586 (98.891 %) Training Loss: 0.0023339
Epoch-8:
Training Accuracy: 9283/586 (99.008 %) Training Loss: 0.0020517

Epoch-9:
Training Accuracy: 9308/586 (99.275 %) Training Loss: 0.0014287
Epoch-10:
Training Accuracy: 9314/586 (99.339 %) Training Loss: 0.0011973
Epoch-11:
Training Accuracy: 9313/586 (99.328 %) Training Loss: 0.0012771
Epoch-12:
Training Accuracy: 9316/586 (99.36 %) Training Loss: 0.0013048
Epoch-13:
Training Accuracy: 9316/586 (99.36 %) Training Loss: 0.001293
Epoch-14:
Training Accuracy: 9333/586 (99.541 %) Training Loss: 0.00094754
Epoch-15:
Training Accuracy: 9335/586 (99.563 %) Training Loss: 0.00083233
Epoch-16:
Training Accuracy: 9334/586 (99.552 %) Training Loss: 0.00090389
Epoch-17:
Training Accuracy: 9334/586 (99.552 %) Training Loss: 0.0010443
Epoch-18:
Training Accuracy: 9355/586 (99.776 %) Training Loss: 0.00059485
Epoch-19:
Training Accuracy: 9336/586 (99.573 %) Training Loss: 0.0009778
Epoch-20:
Training Accuracy: 9352/586 (99.744 %) Training Loss: 0.0005945
Epoch-21:
Training Accuracy: 9346/586 (99.68 %) Training Loss: 0.00075879
Epoch-22:
Training Accuracy: 9370/586 (99.936 %) Training Loss: 0.00023104
Epoch-23:
Training Accuracy: 9362/586 (99.851 %) Training Loss: 0.00032423
Epoch-24:
Training Accuracy: 9342/586 (99.637 %) Training Loss: 0.00076407
Epoch-25:
Training Accuracy: 9372/586 (99.957 %) Training Loss: 0.00019728
Epoch-26:
Training Accuracy: 9359/586 (99.819 %) Training Loss: 0.00047103
Epoch-27:
Training Accuracy: 9325/586 (99.456 %) Training Loss: 0.0012814
Epoch-28:
Training Accuracy: 9372/586 (99.957 %) Training Loss: 0.00020398
Epoch-29:
Training Accuracy: 9358/586 (99.808 %) Training Loss: 0.0004327

```
# test proess
from torch.utils.tensorboard import SummaryWriter
test_losses = 0.0
test_accuracy = 0
epochs = 50
for epoch in range(epochs): # loop over the dataset multiple times
    print('Epoch-{}'.format(epoch + 1, optimizer.param_groups[0]['lr']))
    for i, data in enumerate(testloader, 0):
        inputs, labels = data # get the inputs; data is a list of [inputs, labels]
        inputs, labels = inputs.cuda(), labels.cuda() # for using data in GPU
        optimizer.zero_grad() # zero the parameter gradients
        outputs = model(inputs) # forward
        loss = criterion(outputs, labels) # calculate loss
        loss.backward() # backward loss
        optimizer.step() # optimize gradients
        test_losses += loss.item() # save loss
        _, preds = torch.max(outputs, 1) # save prediction
        test_accuracy += torch.sum(preds == labels.data) # save test_accuracy
        if i % 1000 == 999: # every 1000 mini-batches...
            steps = epoch * len(testloader) + i # calculate steps
            batch = i*batch_size # calculate batch
            print("Test loss {:.5} Test Accuracy {:.5} Steps: {}".format(test_losses / batch, test_accuracy/batch, steps))
            # Save test_accuracy and loss to Tensorboard
            writer.add_scalar('Test loss by steps', test_losses / batch, steps)
            writer.add_scalar('Test accuracy by steps', test_accuracy / batch, steps)
    print("Test Accuracy: {}/{} ({:.5} %) Test Loss: {:.5}".format(test_accuracy, len(testloader), 100. * test_accuracy / len(testloader.datas
    test_losses = 0.0
    test_accuracy = 0
print('Test is Finished...')
```

Epoch-1:
Test Accuracy: 310/26 (76.355 %) Test Loss: 0.053969
Epoch-2:
Test Accuracy: 327/26 (80.542 %) Test Loss: 0.03699
Epoch-3:
Test Accuracy: 345/26 (84.975 %) Test Loss: 0.029452
Epoch-4:
Test Accuracy: 370/26 (91.133 %) Test Loss: 0.01679
Epoch-5:
Test Accuracy: 387/26 (95.32 %) Test Loss: 0.0092433
Epoch-6:
Test Accuracy: 388/26 (95.566 %) Test Loss: 0.0093796
Epoch-7:
Test Accuracy: 384/26 (94.581 %) Test Loss: 0.012332
Epoch-8:
Test Accuracy: 391/26 (96.805 %) Test Loss: 0.0087754

```
Test Accuracy: 391/26 (96.305 %) Test Loss: 0.0085751
Epoch-9:
Test Accuracy: 398/26 (98.03 %) Test Loss: 0.0065917
Epoch-10:
Test Accuracy: 398/26 (98.03 %) Test Loss: 0.0049848
Epoch-11:
Test Accuracy: 398/26 (98.03 %) Test Loss: 0.0049415
Epoch-12:
Test Accuracy: 402/26 (99.015 %) Test Loss: 0.0027164
Epoch-13:
Test Accuracy: 401/26 (98.768 %) Test Loss: 0.0037744
Epoch-14:
Test Accuracy: 387/26 (95.32 %) Test Loss: 0.013747
Epoch-15:
Test Accuracy: 397/26 (97.783 %) Test Loss: 0.0053257
Epoch-16:
Test Accuracy: 392/26 (96.552 %) Test Loss: 0.0055379
Epoch-17:
Test Accuracy: 399/26 (98.276 %) Test Loss: 0.0035233
Epoch-18:
Test Accuracy: 404/26 (99.507 %) Test Loss: 0.0020299
Epoch-19:
Test Accuracy: 405/26 (99.754 %) Test Loss: 0.0025048
Epoch-20:
Test Accuracy: 397/26 (97.783 %) Test Loss: 0.0039818
Epoch-21:
Test Accuracy: 401/26 (98.768 %) Test Loss: 0.0048496
Epoch-22:
Test Accuracy: 400/26 (98.522 %) Test Loss: 0.0031185
Epoch-23:
Test Accuracy: 398/26 (98.03 %) Test Loss: 0.004036
Epoch-24:
Test Accuracy: 401/26 (98.768 %) Test Loss: 0.0028005
Epoch-25:
Test Accuracy: 394/26 (97.044 %) Test Loss: 0.005777
Epoch-26:
Test Accuracy: 400/26 (98.522 %) Test Loss: 0.003026
Epoch-27:
Test Accuracy: 404/26 (99.507 %) Test Loss: 0.0017693
Epoch-28:
Test Accuracy: 404/26 (99.507 %) Test Loss: 0.0017616
Epoch-29:
Test Accuracy: 403/26 (99.261 %) Test Loss: 0.0017022
```

```
# import Times New Roman font
import matplotlib.font_manager
!wget https://github.com/trishume/OpenTuringCompiler/blob/master/stdlib-sfml/fonts/Times%20New%20Roman.ttf -P /usr/local/lib/python3.6/dist-packages/matplotlib/mpl-data/fonts/ttf/
import matplotlib.pyplot as plt
plt.rcParams['font.family'] = 'serif'
plt.rcParams['font.serif'] = ['Times New Roman'] + plt.rcParams['font.serif']
# test confusion matrix
from sklearn.metrics import confusion_matrix
import seaborn as sns
from sklearn.metrics import ConfusionMatrixDisplay
import seaborn as sn
import pandas as pd
y_pred = []
y_true = []
# iterate over test data
for inputs, labels in testloader:
    inputs, labels = inputs.cuda(), labels.cuda()
    output = model(inputs) # Feed Network
    output = (torch.max(torch.exp(output), 1)[1]).data.cpu().numpy()
    y_pred.extend(output) # Save Prediction
    labels = labels.data.cpu().numpy()
    y_true.extend(labels) # Save Truth
cm = confusion_matrix(y_true, y_pred)
cm_display = ConfusionMatrixDisplay(cm)
cm_display.plot(cmap=plt.cm.Greys)
```


```
--2023-10-24 17:06:25-- https://github.com/trishume/OpenTuringCompiler/blob/master/stdlib-sfml/fonts/Times%20New%20Roman.ttf
Resolving github.com (github.com)... 140.82.113.4
Connecting to github.com (github.com)|140.82.113.4|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 5715 (5.6K) [text/plain]
Saving to: '/usr/local/lib/python3.6/dist-packages/matplotlib/mpl-data/fonts/ttf/Times New Roman.ttf'
```

```
Times New Roman.ttf 100%[=====] 5.58K --.-KB/s in 0s
```

```
2023-10-24 17:06:26 (58.9 MB/s) - '/usr/local/lib/python3.6/dist-packages/matplotlib/mpl-data/fonts/ttf/Times New Roman.ttf' [100%]
```


```
<sklearn.metrics._plot.confusion_matrix.ConfusionMatrixDisplay at 0x7ec11c1c75e0>
```



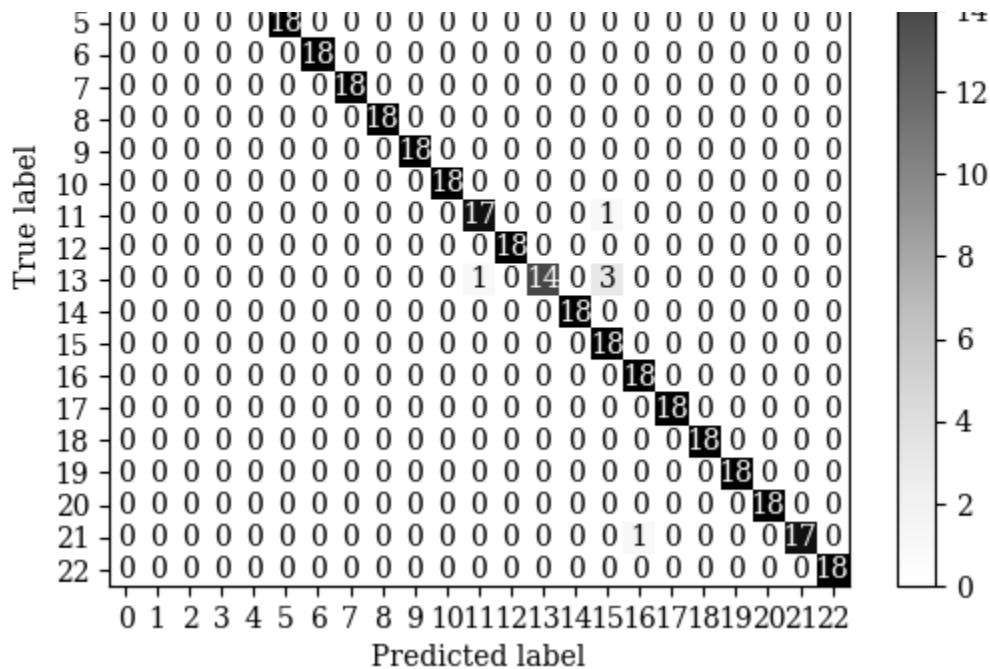

```
import tensorflow
from tensorflow.keras.utils import load_img
from tensorflow.keras.utils import img_to_array
image = load_img('/content/MyPollen23E/train/3.Arrabidaea/arrabidaea_29.jpg')
data = img_to_array(image)
samples = np.expand_dims(data, 0)
print('An image of class 3.Arrabidaea:')
plt.imshow(image)
plt.show()
```

An image of class 3.Arrabidaea:

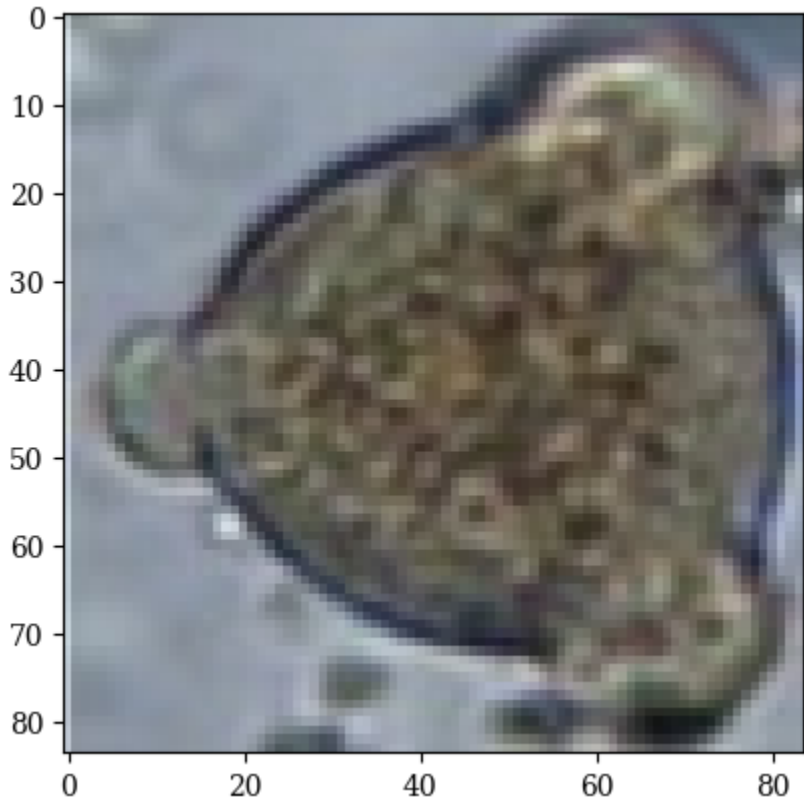

```
from torchvision import models, transforms, utils
transform = transforms.Compose([
    transforms.Resize((84, 84)),
    transforms.ToTensor(),
    transforms.Normalize(mean=0., std=1.)
])
# we will save the conv layer weights in this list
model_weights = []
# we will save the 49 conv layers in this list
conv_layers = []
# get all the model children as list
model_children = list(model.children())
# counter to keep count of the conv layers
counter = 0
# append all the conv layers and their respective wights to the list
for i in range(len(model_children)):
    if type(model_children[i]) == nn.Conv2d:
        counter+=1
        model_weights.append(model_children[i].weight)
        conv_layers.append(model_children[i])
    elif type(model_children[i]) == nn.Sequential:
        for j in range(len(model_children[i])):
            for child in model_children[i][j].children():
                if type(child) == nn.Conv2d:
                    counter+=1
                    model_weights.append(child.weight)
                    conv_layers.append(child)
print(f"Total convolution layers: {counter}")
print("conv_layers")
```

total convolution layers: 17
conv_layers

```
from torch.autograd import Variable
import matplotlib.pyplot as plt
import scipy.misc
from PIL import Image
import json
%matplotlib inline
image = transform(image)
print(f"Image shape before: {image.shape}")
image = image.unsqueeze(0)
print(f"Image shape after: {image.shape}")
image = image.to(device)
```

Image shape before: torch.Size([3, 84, 84])
Image shape after: torch.Size([1, 3, 84, 84])

```
outputs = []
names = []
for layer in conv_layers[0:]:
    image = layer(image)
    outputs.append(image)
    names.append(str(layer))
print(len(outputs))
# print feature_maps
for feature_map in outputs:
    print(feature_map.shape)
```


17
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 128, 42, 42])
torch.Size([1, 128, 42, 42])
torch.Size([1, 128, 42, 42])
torch.Size([1, 128, 42, 42])
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 512, 11, 11])
torch.Size([1, 512, 11, 11])
torch.Size([1, 512, 11, 11])
torch.Size([1, 512, 11, 11])

```
processed = []
for feature_map in outputs:
    feature_map = feature_map.squeeze(0)
    gray_scale = torch.sum(feature_map,0)
    gray_scale = gray_scale / feature_map.shape[0]
    processed.append(gray_scale.data.cpu().numpy())
for fm in processed:
    print(fm.shape)
```


(84, 84)
(84, 84)
(84, 84)
(84, 84)
(84, 84)
(42, 42)
(42, 42)
(42, 42)
(42, 42)
(21, 21)
(21, 21)
(21, 21)
(21, 21)
(11, 11)
(11, 11)
(11, 11)
(11, 11)

```
# print feature maps of image
fig = plt.figure(figsize=(30, 50))
for i in range(len(processed)):
    a = fig.add_subplot(7, 4, i+1)
    imgplot = plt.imshow(processed[i])
    a.axis("off")
    a.set_title(names[i].split('(')[0], fontsize=30)
```




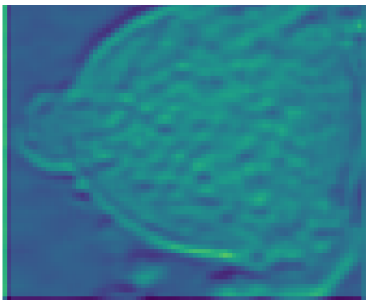


Conv2d

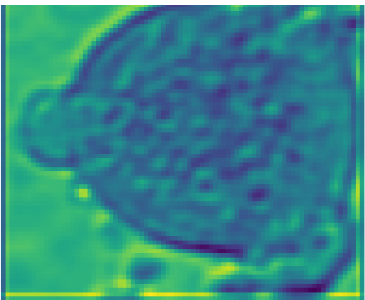


Conv2d

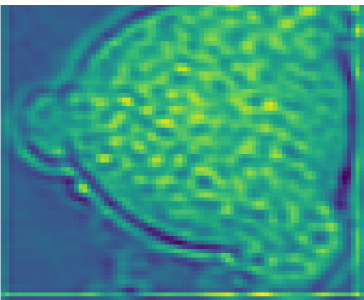


Conv2d

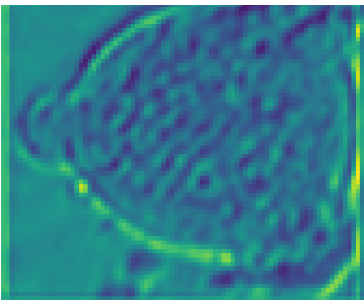


Conv2d

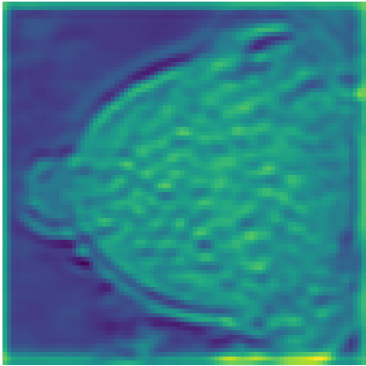


Conv2d




Conv2d

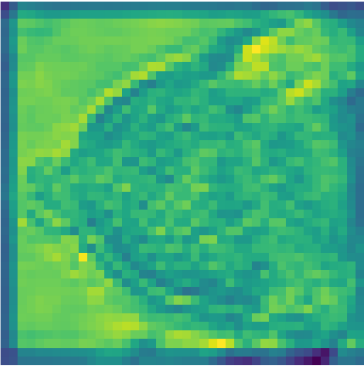


Conv2d

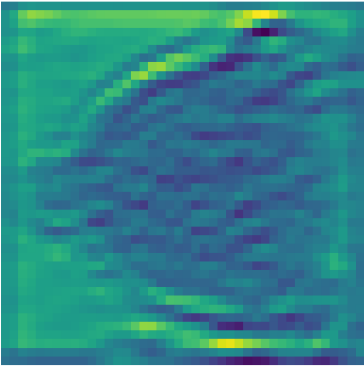


Conv2d

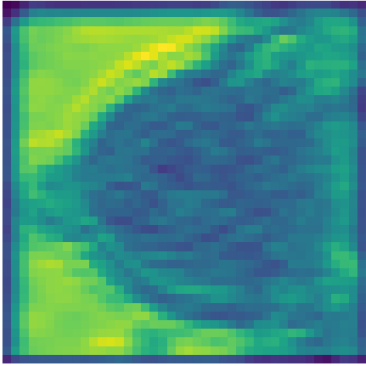


Conv2d

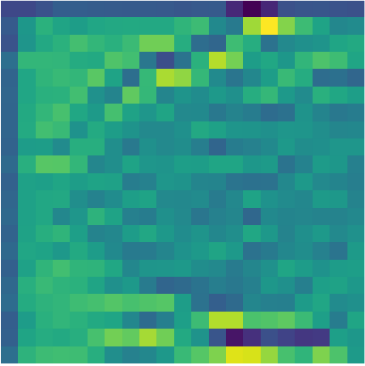


Conv2d

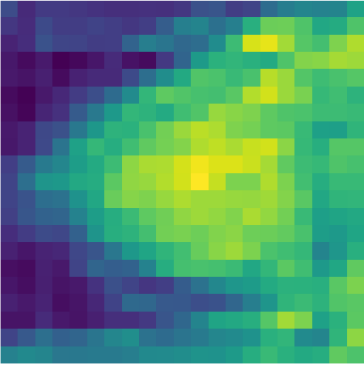





Conv2d

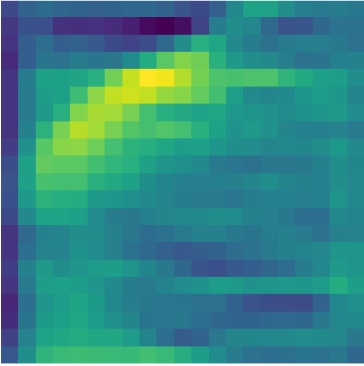

Conv2d

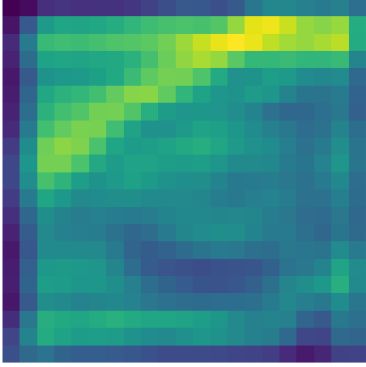


Conv2d

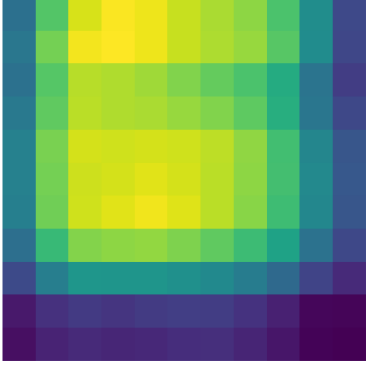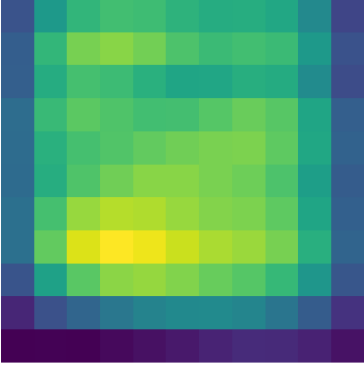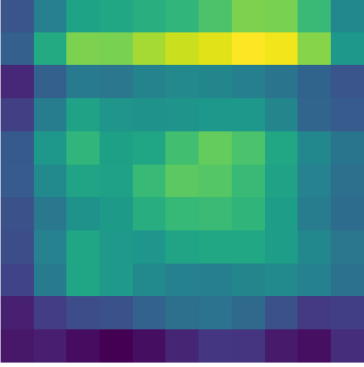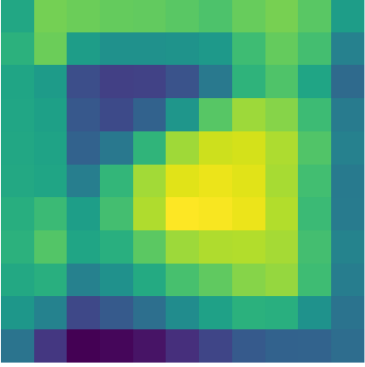

```
from tensorflow.keras.utils import load_img
from tensorflow.keras.utils import img_to_array
image = load_img('/content/MyPollen23E/train/7.Croton/croton_19.jpg')
data = img_to_array(image)
samples = np.expand_dims(data, 0)
print('An image of class 7.Croton:')
plt.imshow(image)
plt.show()
```

An image of class 7.Croton:

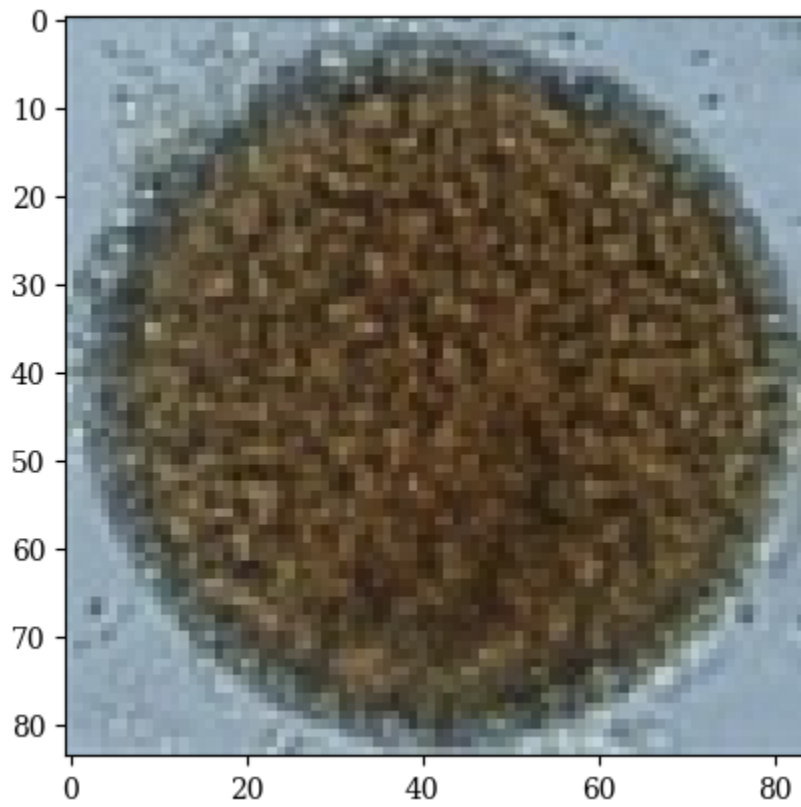

```
from torchvision import models, transforms, utils
transform = transforms.Compose([
    transforms.Resize((84, 84)),
    transforms.ToTensor(),
    transforms.Normalize(mean=0., std=1.)
])
```

```
# we will save the conv layer weights in this list
model_weights = []
#we will save the 49 conv layers in this list
conv_layers = []
# get all the model children as list
model_children = list(model.children())
# counter to keep count of the conv layers
counter = 0
# append all the conv layers and their respective wights to the list
for i in range(len(model_children)):
    if type(model_children[i]) == nn.Conv2d:
        counter+=1
        model_weights.append(model_children[i].weight)
        conv_layers.append(model_children[i])
    elif type(model_children[i]) == nn.Sequential:
        for j in range(len(model_children[i])):
            for child in model_children[i][j].children():
                if type(child) == nn.Conv2d:
                    counter+=1
                    model_weights.append(child.weight)
                    conv_layers.append(child)
print(f"Total convolution layers: {counter}")
print("conv_layers")
```

Total convolution layers: 17
conv_layers

```
from torch.autograd import Variable
import matplotlib.pyplot as plt
import scipy.misc
from PIL import Image
import json
%matplotlib inline
image = transform(image)
print(f"Image shape before: {image.shape}")
image = image.unsqueeze(0)
print(f"Image shape after: {image.shape}")
image = image.to(device)
```

Image shape before: torch.Size([3, 84, 84])
Image shape after: torch.Size([1, 3, 84, 84])

```
outputs = []
names = []
```


```
names = []
for layer in conv_layers[0:]:
    image = layer(image)
    outputs.append(image)
    names.append(str(layer))
print(len(outputs))
# print feature_maps
for feature_map in outputs:
    print(feature_map.shape)
```


```
17
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 128, 42, 42])
torch.Size([1, 128, 42, 42])
torch.Size([1, 128, 42, 42])
torch.Size([1, 128, 42, 42])
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 512, 11, 11])
torch.Size([1, 512, 11, 11])
torch.Size([1, 512, 11, 11])
torch.Size([1, 512, 11, 11])
```

```
processed = []
for feature_map in outputs:
    feature_map = feature_map.squeeze(0)
    gray_scale = torch.sum(feature_map,0)
    gray_scale = gray_scale / feature_map.shape[0]
    processed.append(gray_scale.data.cpu().numpy())
for fm in processed:
    print(fm.shape)
```

```
(84, 84)
(84, 84)
(84, 84)
(84, 84)
(84, 84)
(42, 42)
(42, 42)
(42, 42)
(42, 42)
(21, 21)
(21, 21)
(21, 21)
(21, 21)
(21, 21)
(11, 11)
(11, 11)
(11, 11)
(11, 11)
```

```
# print feature maps of image
fig = plt.figure(figsize=(30, 50))
for i in range(len(processed)):
    a = fig.add_subplot(7, 4, i+1)
    imgplot = plt.imshow(processed[i])
    a.axis("off")
    a.set_title(names[i].split('(')[0], fontsize=30)
```

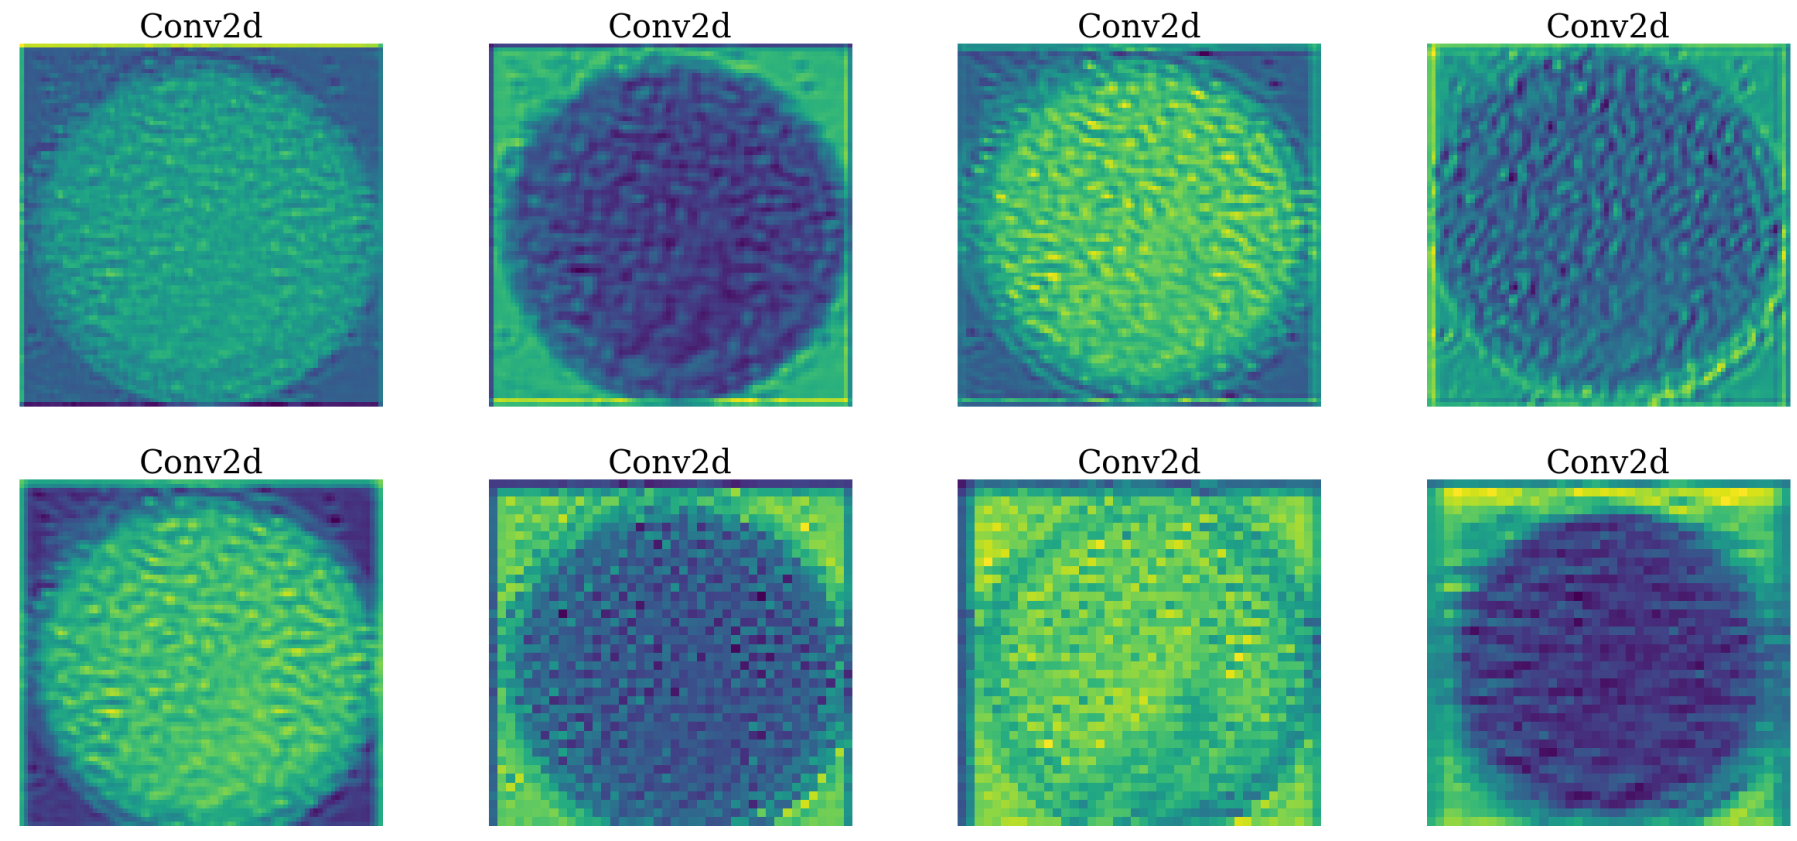


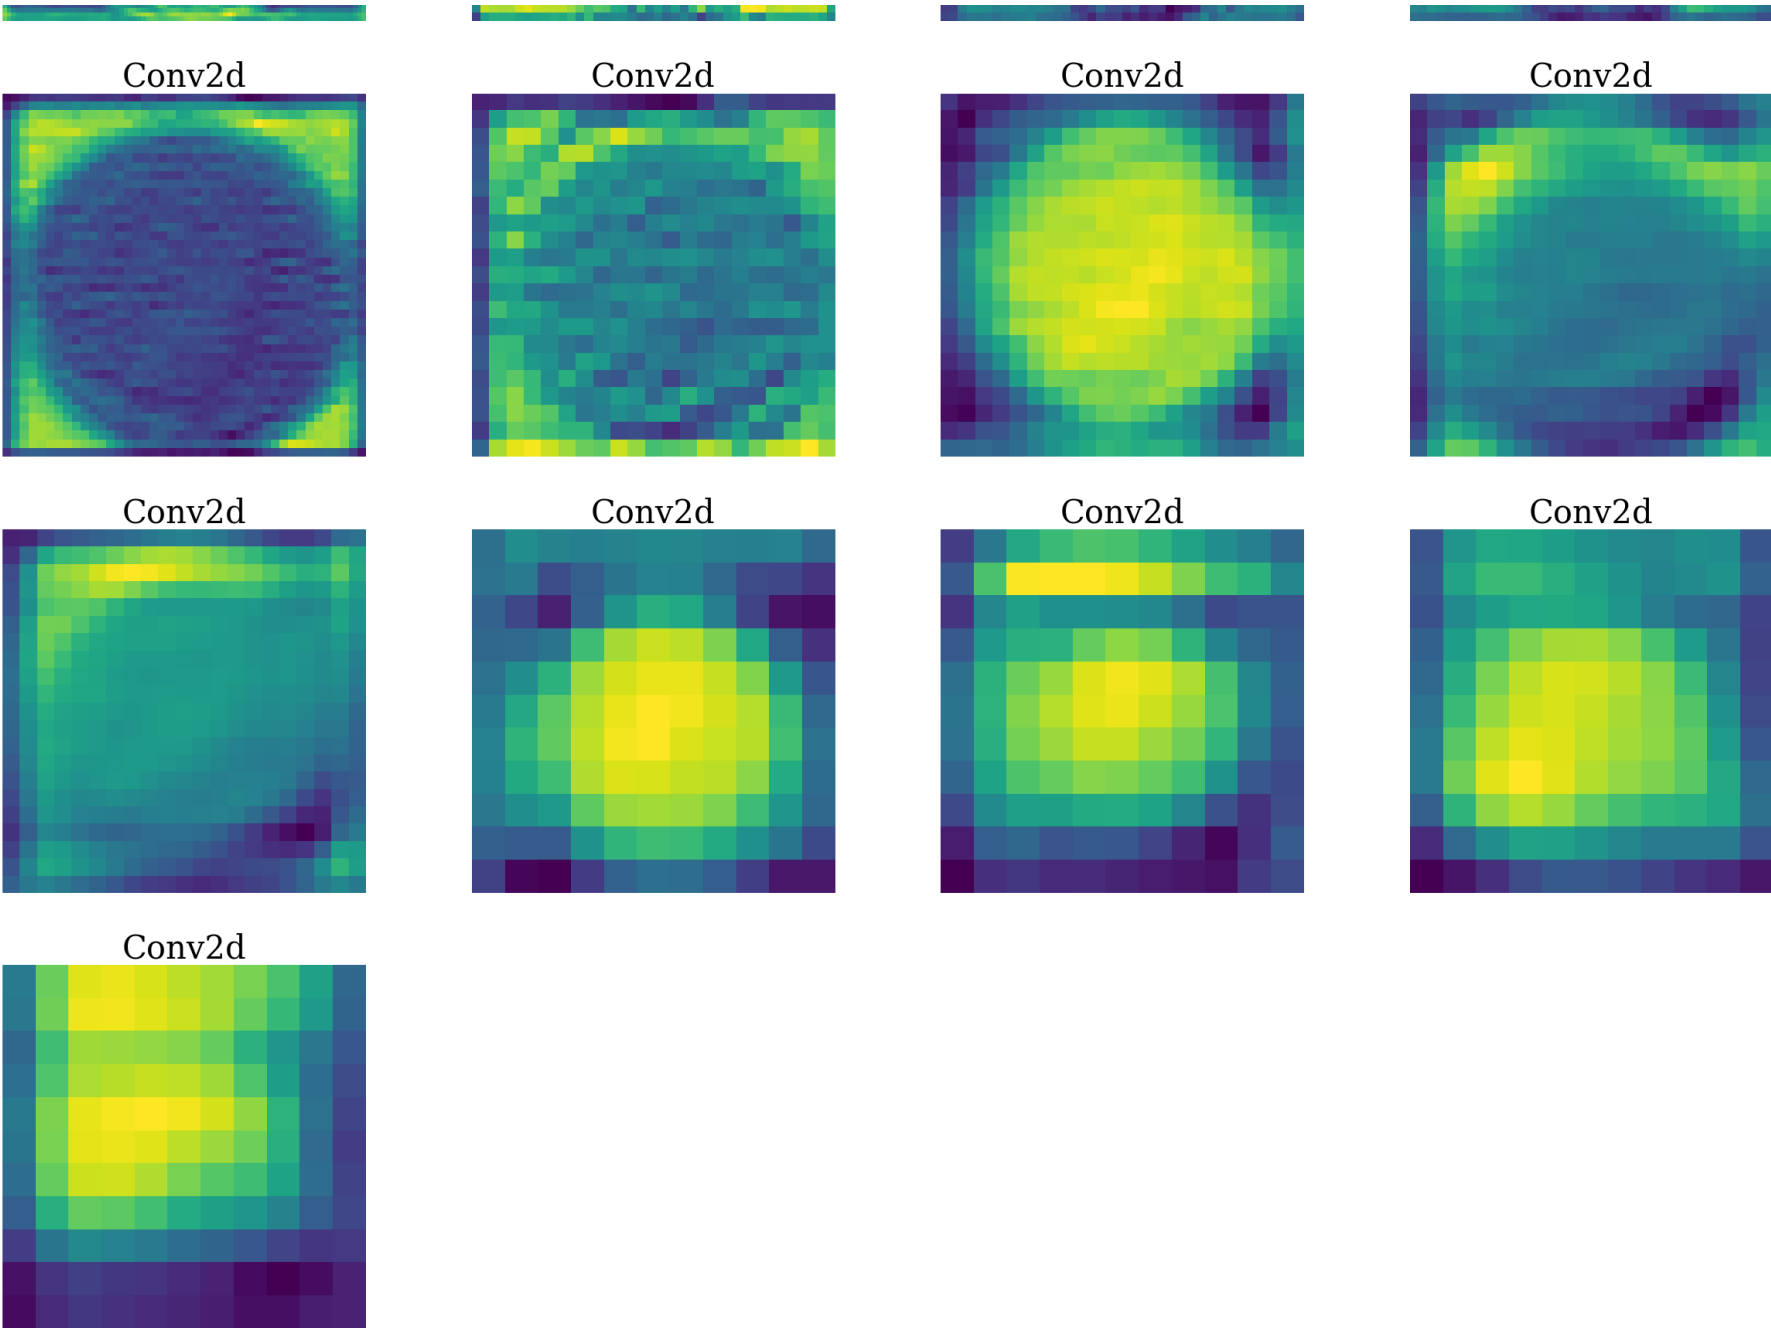

```
import tensorflow
from tensorflow.keras.utils import load_img
from tensorflow.keras.utils import img_to_array
image = load_img('/content/MyPollen23E/train/12.Mabea/mabea_20.jpg')
data = img_to_array(image)
samples = np.expand_dims(data, 0)
print('An image of class 12.Mabea:')
plt.imshow(image)
plt.show()
```

An image of class 12.Mabea:



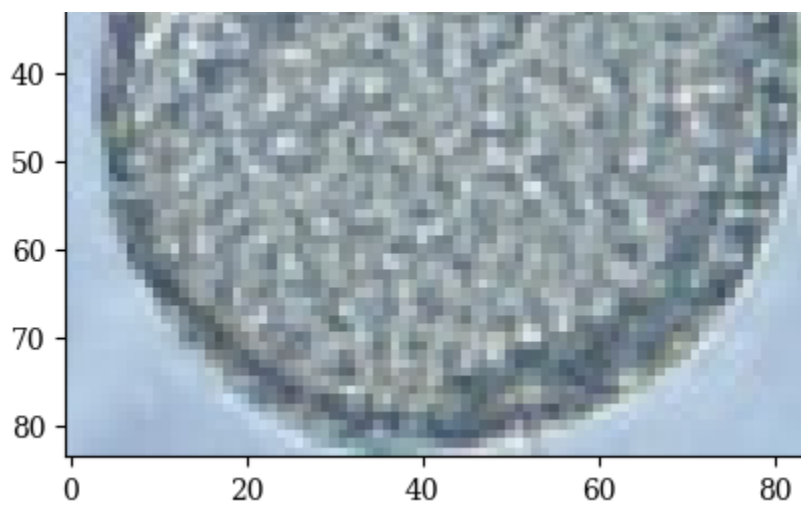

```
from torchvision import models, transforms, utils
transform = transforms.Compose([
    transforms.Resize((84, 84)),
    transforms.ToTensor(),
    transforms.Normalize(mean=0., std=1.)
])
```

```
# we will save the conv layer weights in this list
model_weights = []
# we will save the 49 conv layers in this list
conv_layers = []
# get all the model children as list
model_children = list(model.children())
# counter to keep count of the conv layers
counter = 0
# append all the conv layers and their respective weights to the list
for i in range(len(model_children)):
    if type(model_children[i]) == nn.Conv2d:
        counter+=1
        model_weights.append(model_children[i].weight)
        conv_layers.append(model_children[i])
    elif type(model_children[i]) == nn.Sequential:
        for j in range(len(model_children[i])):
            for child in model_children[i][j].children():
                if type(child) == nn.Conv2d:
                    counter+=1
                    model_weights.append(child.weight)
                    conv_layers.append(child)
print(f"Total convolution layers: {counter}")
print("conv_layers")
```

```
Total convolution layers: 17
conv_layers
```

```
from torch.autograd import Variable
import matplotlib.pyplot as plt
import scipy.misc
from PIL import Image
import json
%matplotlib inline
image = transform(image)
print(f"Image shape before: {image.shape}")
image = image.unsqueeze(0)
print(f"Image shape after: {image.shape}")
image = image.to(device)
```

```
Image shape before: torch.Size([3, 84, 84])
Image shape after: torch.Size([1, 3, 84, 84])
```

```
outputs = []
names = []
for layer in conv_layers[0:]:
    image = layer(image)
    outputs.append(image)
    names.append(str(layer))
print(len(outputs))
# print feature_maps
for feature_map in outputs:
    print(feature_map.shape)
```


```
17
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 64, 84, 84])
torch.Size([1, 128, 42, 42])
torch.Size([1, 128, 42, 42])
torch.Size([1, 128, 42, 42])
torch.Size([1, 128, 42, 42])
```


```
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 256, 21, 21])
torch.Size([1, 512, 11, 11])
torch.Size([1, 512, 11, 11])
torch.Size([1, 512, 11, 11])
torch.Size([1, 512, 11, 11])
```

```
processed = []
for feature_map in outputs:
    feature_map = feature_map.squeeze(0)
    gray_scale = torch.sum(feature_map,0)
    gray_scale = gray_scale / feature_map.shape[0]
    processed.append(gray_scale.data.cpu().numpy())
for fm in processed:
    print(fm.shape)
```


```
(84, 84)
(84, 84)
(84, 84)
(84, 84)
(84, 84)
(42, 42)
(42, 42)
(42, 42)
(42, 42)
(21, 21)
(21, 21)
(21, 21)
(21, 21)
(11, 11)
(11, 11)
(11, 11)
(11, 11)
```

```
# print feature maps of image
fig = plt.figure(figsize=(30, 50))
for i in range(len(processed)):
    a = fig.add_subplot(7, 4, i+1)
    imgplot = plt.imshow(processed[i])
    a.axis("off")
    a.set_title(names[i].split('(')[0], fontsize=30)
```

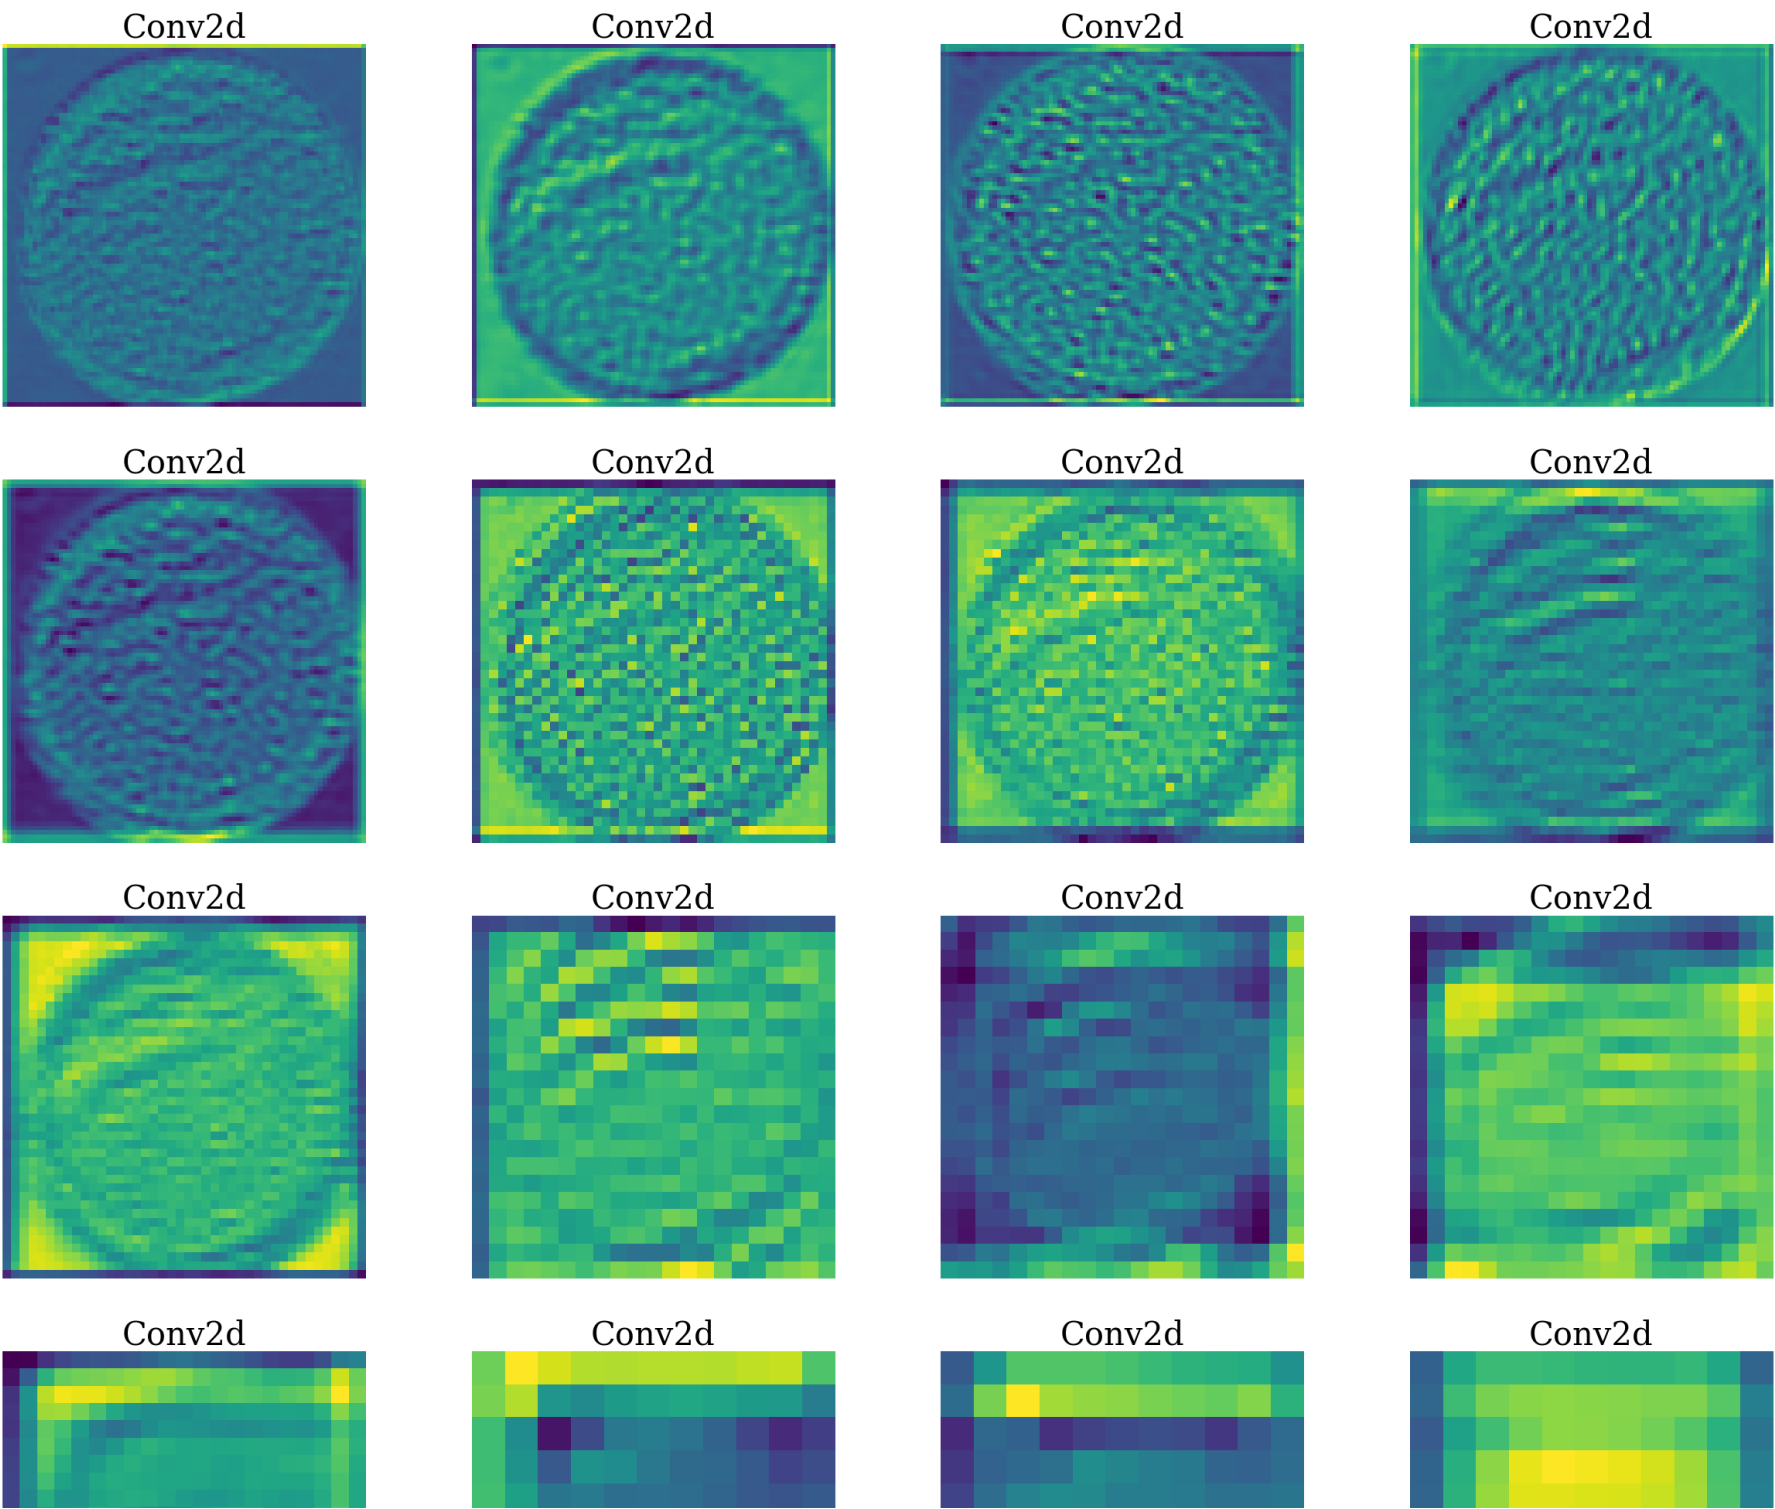

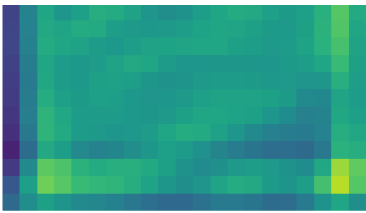

Conv2d

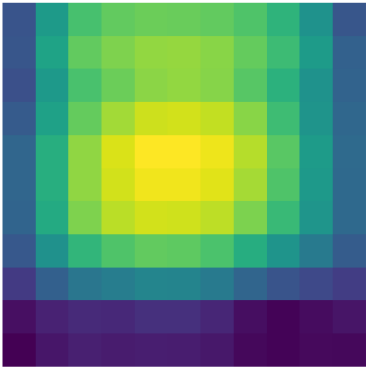

```
!pip install git+https://github.com/jacobgil/pytorch-grad-cam.git
```

```
Collecting git+https://github.com/jacobgil/pytorch-grad-cam.git
  Cloning https://github.com/jacobgil/pytorch-grad-cam.git to /tmp/pip-req-build-_0wo2wme
  Running command git clone --filter=blob:none --quiet https://github.com/jacobgil/pytorch-grad-cam.git /tmp/pip-req
  Resolved https://github.com/jacobgil/pytorch-grad-cam.git to commit 09ac162e8f609eed02a8e35a370ef5bf30de19a1
  Installing build dependencies ... done
  Getting requirements to build wheel ... done
  Preparing metadata (pyproject.toml) ... done
Requirement already satisfied: numpy in /usr/local/lib/python3.10/dist-packages (from grad-cam==1.4.8) (1.23.5)
Requirement already satisfied: Pillow in /usr/local/lib/python3.10/dist-packages (from grad-cam==1.4.8) (9.4.0)
Requirement already satisfied: torch>=1.7.1 in /usr/local/lib/python3.10/dist-packages (from grad-cam==1.4.8) (2.1.0)
Requirement already satisfied: torchvision>=0.8.2 in /usr/local/lib/python3.10/dist-packages (from grad-cam==1.4.8)
Collecting ttach (from grad-cam==1.4.8)
  Downloading ttach-0.0.3-py3-none-any.whl (9.8 kB)
Requirement already satisfied: tqdm in /usr/local/lib/python3.10/dist-packages (from grad-cam==1.4.8) (4.66.1)
Requirement already satisfied: opencv-python in /usr/local/lib/python3.10/dist-packages (from grad-cam==1.4.8) (4.8.
Requirement already satisfied: matplotlib in /usr/local/lib/python3.10/dist-packages (from grad-cam==1.4.8) (3.7.1)
Requirement already satisfied: scikit-learn in /usr/local/lib/python3.10/dist-packages (from grad-cam==1.4.8) (1.2.2
Requirement already satisfied: filelock in /usr/local/lib/python3.10/dist-packages (from torch>=1.7.1->grad-cam==1.4
Requirement already satisfied: typing-extensions in /usr/local/lib/python3.10/dist-packages (from torch>=1.7.1->grad
Requirement already satisfied: sympy in /usr/local/lib/python3.10/dist-packages (from torch>=1.7.1->grad-cam==1.4.8)
Requirement already satisfied: networkx in /usr/local/lib/python3.10/dist-packages (from torch>=1.7.1->grad-cam==1.4
Requirement already satisfied: Jinja2 in /usr/local/lib/python3.10/dist-packages (from torch>=1.7.1->grad-cam==1.4.8
Requirement already satisfied: fsspec in /usr/local/lib/python3.10/dist-packages (from torch>=1.7.1->grad-cam==1.4.8
Requirement already satisfied: triton==2.1.0 in /usr/local/lib/python3.10/dist-packages (from torch>=1.7.1->grad-cam
Requirement already satisfied: requests in /usr/local/lib/python3.10/dist-packages (from torchvision>=0.8.2->grad-ca
Requirement already satisfied: contourpy>=1.0.1 in /usr/local/lib/python3.10/dist-packages (from matplotlib->grad-ca
Requirement already satisfied: cycler>=0.10 in /usr/local/lib/python3.10/dist-packages (from matplotlib->grad-cam==1
Requirement already satisfied: fonttools>=4.22.0 in /usr/local/lib/python3.10/dist-packages (from matplotlib->grad-c
Requirement already satisfied: kiwisolver>=1.0.1 in /usr/local/lib/python3.10/dist-packages (from matplotlib->grad-c
Requirement already satisfied: packaging>=20.0 in /usr/local/lib/python3.10/dist-packages (from matplotlib->grad-cam
Requirement already satisfied: pyparsing>=2.3.1 in /usr/local/lib/python3.10/dist-packages (from matplotlib->grad-ca
Requirement already satisfied: python-dateutil>=2.7 in /usr/local/lib/python3.10/dist-packages (from matplotlib->gra
Requirement already satisfied: scipy>=1.3.2 in /usr/local/lib/python3.10/dist-packages (from scikit-learn->grad-cam=
Requirement already satisfied: joblib>=1.1.1 in /usr/local/lib/python3.10/dist-packages (from scikit-learn->grad-cam
Requirement already satisfied: threadpoolctl>=2.0.0 in /usr/local/lib/python3.10/dist-packages (from scikit-learn->g
Requirement already satisfied: six>=1.5 in /usr/local/lib/python3.10/dist-packages (from python-dateutil>=2.7->matpl
Requirement already satisfied: MarkupSafe>=2.0 in /usr/local/lib/python3.10/dist-packages (from Jinja2->torch>=1.7.1
Requirement already satisfied: charset-normalizer<4.>=2 in /usr/local/lib/python3.10/dist-packages (from requests->t
```

```
Requirement already satisfied: idna&lt4,>=2.5 in /usr/local/lib/python3.10/dist-packages (from requests->torchvision)=
Requirement already satisfied: urllib3&lt3,>=1.21.1 in /usr/local/lib/python3.10/dist-packages (from requests->torchvi
Requirement already satisfied: certifi>=2017.4.17 in /usr/local/lib/python3.10/dist-packages (from requests->torchvi
Requirement already satisfied: mpmath>=0.19 in /usr/local/lib/python3.10/dist-packages (from sympy->torch>=1.7.1->gr
Building wheels for collected packages: grad-cam
  Building wheel for grad-cam (pyproject.toml) ... done
  Created wheel for grad-cam: filename=grad_cam-1.4.8-py3-none-any.whl size=37447 sha256=58e36c549f1f02be69cebf52b58
  Stored in directory: /tmp/pip-ephem-wheel-cache-3ipccbkw/wheels/23/11/66/71a38b0c29ba4ec5f62105a2145278613855bc9c9
Successfully built grad-cam
Installing collected packages: ttach, grad-cam
Successfully installed grad-cam-1.4.8 ttach-0.0.3
```

```
import copy
from pytorch_grad_cam import GradCAM, ScoreCAM, GradCAMPlusPlus, AblationCAM, XGradCAM, EigenCAM, FullGrad
from pytorch_grad_cam.utils.model_targets import ClassifierOutputTarget
from pytorch_grad_cam.utils.image import show_cam_on_image
from torchvision.models import resnet18
import numpy as np
from PIL import Image
import torch
import torch.nn as nn
import torchvision
```

```
# Pick up layers for visualization
target_layers = [model.layer4[-1]]
```

```
path1 = ('/content/MyPollen23E/train/3.Arrabidaea/arrabidaea_29.jpg')
print('An image of class 3.Arrabidaea:')
Image.open(path1).convert('RGB')
```


An image of class 3.Arrabidaea:



```
rgb_img = Image.open(path1).convert('RGB')
# Max min normalization
rgb_img = (rgb_img - np.min(rgb_img)) / (np.max(rgb_img) - np.min(rgb_img))
# Create an input tensor image for your model
input_tensor = torchvision.transforms.functional.to_tensor(rgb_img).unsqueeze(0).float()
# Note: input_tensor can be a batch tensor with several images!
# Construct the CAM object once, and then re-use it on many images:
cam = GradCAM(model=model, target_layers=target_layers, use_cuda=True)
# cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=False)
# cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=False)
# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...
# We have to specify the target we want to generate
# the Class Activation Maps for.
# If targets is None, the highest scoring category
# will be used for every image in the batch.
# Here we use ClassifierOutputTarget, but you can define your own custom targets
# That are, for example, combinations of categories, or specific outputs in a non standard model.
# targets = [e.g ClassifierOutputTarget(281)]
# target_category = None
# You can also pass aug_smooth=True and eigen_smooth=True, to apply smoothing.
grayscale_cam = cam(input_tensor=input_tensor)
# In this example grayscale_cam has only one image in the batch:
grayscale_cam = grayscale_cam[0, :]
visualization = show_cam_on_image(rgb_img, grayscale_cam, use_rgb=True)
```

```
# plot GradCAM of image
print('GradCAM of image:')
Image.fromarray(visualization, 'RGB')
```

GradCAM of image:




```
rgb_img = Image.open(path1).convert('RGB')
# Max min normalization
rgb_img = (rgb_img - np.min(rgb_img)) / (np.max(rgb_img) - np.min(rgb_img))
# Create an input tensor image for your model
input_tensor = torchvision.transforms.functional.to_tensor(rgb_img).unsqueeze(0).float()
# Note: input_tensor can be a batch tensor with several images!
# Construct the CAM object once, and then re-use it on many images:
#cam = GradCAM(model=model, target_layers=target_layers, use_cuda=True)
# cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=False)
# cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=False)
# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...
```

```
cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=True)
# cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=False)
# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...
# We have to specify the target we want to generate
# the Class Activation Maps for.
# If targets is None, the highest scoring category
# will be used for every image in the batch.
# Here we use ClassifierOutputTarget, but you can define your own custom targets
# That are, for example, combinations of categories, or specific outputs in a non standard model.
# targets = [e.g ClassifierOutputTarget(281)]
# target_category = None
# You can also pass aug_smooth=True and eigen_smooth=True, to apply smoothing.
grayscale_cam = cam(input_tensor=input_tensor)
# In this example grayscale_cam has only one image in the batch:
grayscale_cam = grayscale_cam[0, :]
visualization = show_cam_on_image(rgb_img, grayscale_cam, use_rgb=True)
```

```
# plot GradCAMPlusPlus of image
print('GradCAMPlusPlus of image:')
Image.fromarray(visualization, 'RGB')
```

GradCAMPlusPlus of image:




```
rgb_img = Image.open(path1).convert('RGB')
# Max min normalization
rgb_img = (rgb_img - np.min(rgb_img)) / (np.max(rgb_img) - np.min(rgb_img))
# Create an input tensor image for your model
input_tensor = torchvision.transforms.functional.to_tensor(rgb_img).unsqueeze(0).float()
# Note: input_tensor can be a batch tensor with several images!
# Construct the CAM object once, and then re-use it on many images:
#cam = GradCAM(model=model, target_layers=target_layers, use_cuda=True)
#cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=True)
cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=True)
# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...
# We have to specify the target we want to generate
# the Class Activation Maps for.
# If targets is None, the highest scoring category
# will be used for every image in the batch.
# Here we use ClassifierOutputTarget, but you can define your own custom targets
# That are, for example, combinations of categories, or specific outputs in a non standard model.
# targets = [e.g ClassifierOutputTarget(281)]
# target_category = None
# You can also pass aug_smooth=True and eigen_smooth=True, to apply smoothing.
grayscale_cam = cam(input_tensor=input_tensor)
# In this example grayscale_cam has only one image in the batch:
grayscale_cam = grayscale_cam[0, :]
visualization = show_cam_on_image(rgb_img, grayscale_cam, use_rgb=True)
```

100%|██████████| 32/32 [00:01<00:00, 25.61it/s]


```
# plot ScoreCAM of image
print('ScoreCAM of image:')
Image.fromarray(visualization, 'RGB')
```

ScoreCAM of image:



```
path2 = ('/content/MyPollen23E/train/7.Croton/croton_19.jpg')
print('An image of class 7.Croton:')
Image.open(path2).convert('RGB')
```

An image of class 7.Croton:



```
rgb_img = Image.open(path2).convert('RGB')
# Max min normalization
rgb_img = (rgb_img - np.min(rgb_img)) / (np.max(rgb_img) - np.min(rgb_img))
```



```
# Create an input tensor image for your model
input_tensor = torchvision.transforms.functional.to_tensor(rgb_img).unsqueeze(0).float()
# Note: input_tensor can be a batch tensor with several images!

# Construct the CAM object once, and then re-use it on many images:
cam1 = GradCAM(model=model, target_layers=target_layers, use_cuda=True)
#cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=True)
# cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=False)

# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...


# We have to specify the target we want to generate
# the Class Activation Maps for.
# If targets is None, the highest scoring category
# will be used for every image in the batch.
# Here we use ClassifierOutputTarget, but you can define your own custom targets
# That are, for example, combinations of categories, or specific outputs in a non standard model.
# targets = [e.g ClassifierOutputTarget(281)]
# target_category = None

# You can also pass aug_smooth=True and eigen_smooth=True, to apply smoothing.
grayscale_cam1 = cam1(input_tensor=input_tensor)

# In this example grayscale_cam1 has only one image in the batch:
grayscale_cam1 = grayscale_cam1[0, :]
visualization = show_cam_on_image(rgb_img, grayscale_cam1, use_rgb=True)
```

```
# plot GradCAM of image
print('GradCAM of image:')
Image.fromarray(visualization, 'RGB')
```

GradCAM of image:




```
rgb_img = Image.open(path2).convert('RGB')
# Max min normalization
rgb_img = (rgb_img - np.min(rgb_img)) / (np.max(rgb_img) - np.min(rgb_img))
# Create an input tensor image for your model
input_tensor = torchvision.transforms.functional.to_tensor(rgb_img).unsqueeze(0).float()
# Note: input_tensor can be a batch tensor with several images!
# Construct the CAM object once, and then re-use it on many images:
#cam = GradCAM(model=model, target_layers=target_layers, use_cuda=True)
cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=True)
# cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=False)
# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...

# We have to specify the target we want to generate
# the Class Activation Maps for.
# If targets is None, the highest scoring category
# will be used for every image in the batch.
# Here we use ClassifierOutputTarget, but you can define your own custom targets
# That are, for example, combinations of categories, or specific outputs in a non standard model.
# targets = [e.g ClassifierOutputTarget(281)]
# target_category = None
# You can also pass aug_smooth=True and eigen_smooth=True, to apply smoothing.
grayscale_cam = cam(input_tensor=input_tensor)
# In this example grayscale_cam has only one image in the batch:
grayscale_cam = grayscale_cam[0, :]
visualization = show_cam_on_image(rgb_img, grayscale_cam, use_rgb=True)
```

```
# plot GradCAMPlusPlus of image
print('GradCAMPlusPlus of image:')
Image.fromarray(visualization, 'RGB')
```

GradCAMPlusPlus of image:



```
rgb_img = Image.open(path2).convert('RGB')
# Max min normalization
rgb_img = (rgb_img - np.min(rgb_img)) / (np.max(rgb_img) - np.min(rgb_img))
# Create an input tensor image for your model
input_tensor = torchvision.transforms.functional.to_tensor(rgb_img).unsqueeze(0).float()
# Note: input_tensor can be a batch tensor with several images!
# Construct the CAM object once, and then re-use it on many images:
```




```
#cam = GradCAM(model=model, target_layers=target_layers, use_cuda=True)
#cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=True)
cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=True)
# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...
# We have to specify the target we want to generate
# the Class Activation Maps for.
# If targets is None, the highest scoring category
# will be used for every image in the batch.
# Here we use ClassifierOutputTarget, but you can define your own custom targets
# That are, for example, combinations of categories, or specific outputs in a non standard model.
# targets = [e.g ClassifierOutputTarget(281)]
# target_category = None
# You can also pass aug_smooth=True and eigen_smooth=True, to apply smoothing.
grayscale_cam = cam(input_tensor=input_tensor)
# In this example grayscale_cam has only one image in the batch:
grayscale_cam = grayscale_cam[0, :]
visualization = show_cam_on_image(rgb_img, grayscale_cam, use_rgb=True)
```

100%|██████████| 32/32 [00:01<00:00, 24.69it/s]


```
# plot ScoreCAM of image
print('ScoreCAM of image:')
Image.fromarray(visualization, 'RGB')
```

ScoreCAM of image:



```
path3 = ('/content/MyPollen23E/train/12.Mabea/mabea_20.jpg')
print('An image of class 12.Mabea:')
Image.open(path3).convert('RGB')
```

An image of class 12.Mabea:



```
rgb_img = Image.open(path3).convert('RGB')
# Max min normalization
rgb_img = (rgb_img - np.min(rgb_img)) / (np.max(rgb_img) - np.min(rgb_img))
# Create an input tensor image for your model
input_tensor = torchvision.transforms.functional.to_tensor(rgb_img).unsqueeze(0).float()
# Note: input_tensor can be a batch tensor with several images!

# Construct the CAM object once, and then re-use it on many images:
cam1 = GradCAM(model=model, target_layers=target_layers, use_cuda=True)
#cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=True)
# cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=False)

# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...


# We have to specify the target we want to generate
# the Class Activation Maps for.
# If targets is None, the highest scoring category
# will be used for every image in the batch.
# Here we use ClassifierOutputTarget, but you can define your own custom targets
# That are, for example, combinations of categories, or specific outputs in a non standard model.
# targets = [e.g ClassifierOutputTarget(281)]
# target_category = None

# You can also pass aug_smooth=True and eigen_smooth=True, to apply smoothing.
grayscale_cam1 = cam1(input_tensor=input_tensor)

# In this example grayscale_cam1 has only one image in the batch:
grayscale_cam1 = grayscale_cam1[0, :]
visualization = show_cam_on_image(rgb_img, grayscale_cam1, use_rgb=True)
```

```
# plot GradCAM of image
print('GradCAM of image:')
Image.fromarray(visualization, 'RGB')
```

GradCAM of image:






```
rgb_img = Image.open(path3).convert('RGB')
# Max min normalization
rgb_img = (rgb_img - np.min(rgb_img)) / (np.max(rgb_img) - np.min(rgb_img))
# Create an input tensor image for your model
input_tensor = torchvision.transforms.functional.to_tensor(rgb_img).unsqueeze(0).float()
# Note: input_tensor can be a batch tensor with several images!
# Construct the CAM object once, and then re-use it on many images:
#cam = GradCAM(model=model, target_layers=target_layers, use_cuda=True)
cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=True)
# cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=False)
# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...
# We have to specify the target we want to generate
# the Class Activation Maps for.
# If targets is None, the highest scoring category
# will be used for every image in the batch.
# Here we use ClassifierOutputTarget, but you can define your own custom targets
# That are, for example, combinations of categories, or specific outputs in a non standard model.
# targets = [e.g ClassifierOutputTarget(281)]
# target_category = None
# You can also pass aug_smooth=True and eigen_smooth=True, to apply smoothing.
grayscale_cam = cam(input_tensor=input_tensor)
# In this example grayscale_cam has only one image in the batch:
grayscale_cam = grayscale_cam[0, :]
visualization = show_cam_on_image(rgb_img, grayscale_cam, use_rgb=True)
```

```
# plot GradCAMPlusPlus of image
print('GradCAMPlusPlus of image:')
Image.fromarray(visualization, 'RGB')
```

GradCAMPlusPlus of image:



```
rgb_img = Image.open(path3).convert('RGB')
# Max min normalization
rgb_img = (rgb_img - np.min(rgb_img)) / (np.max(rgb_img) - np.min(rgb_img))
# Create an input tensor image for your model
input_tensor = torchvision.transforms.functional.to_tensor(rgb_img).unsqueeze(0).float()
# Note: input_tensor can be a batch tensor with several images!
# Construct the CAM object once, and then re-use it on many images:
#cam = GradCAM(model=model, target_layers=target_layers, use_cuda=True)
#cam = GradCAMPlusPlus(model=model, target_layers=target_layers, use_cuda=True)
cam = ScoreCAM(model=model, target_layers=target_layers, use_cuda=True)
# You can also use it within a with statement, to make sure it is freed,
# In case you need to re-create it inside an outer loop:
# with GradCAM(model=model, target_layers=target_layers, use_cuda=args.use_cuda) as cam:
#     ...
# We have to specify the target we want to generate
# the Class Activation Maps for.
# If targets is None, the highest scoring category
# will be used for every image in the batch.
# Here we use ClassifierOutputTarget, but you can define your own custom targets
# That are, for example, combinations of categories, or specific outputs in a non standard model.
# targets = [e.g ClassifierOutputTarget(281)]
# target_category = None
# You can also pass aug_smooth=True and eigen_smooth=True, to apply smoothing.
grayscale_cam = cam(input_tensor=input_tensor)
# In this example grayscale_cam has only one image in the batch:
grayscale_cam = grayscale_cam[0, :]
visualization = show_cam_on_image(rgb_img, grayscale_cam, use_rgb=True)
```

100%|██████████| 32/32 [00:01<00:00, 26.17it/s]

```
# plot ScoreCAM of image
print('ScoreCAM of image:')
Image.fromarray(visualization, 'RGB')
```

ScoreCAM of image:

