




## Kunal Kushwaha

# Getting started with Docker



Kunal Kushwaha

Jan 21, 2022 7 min read

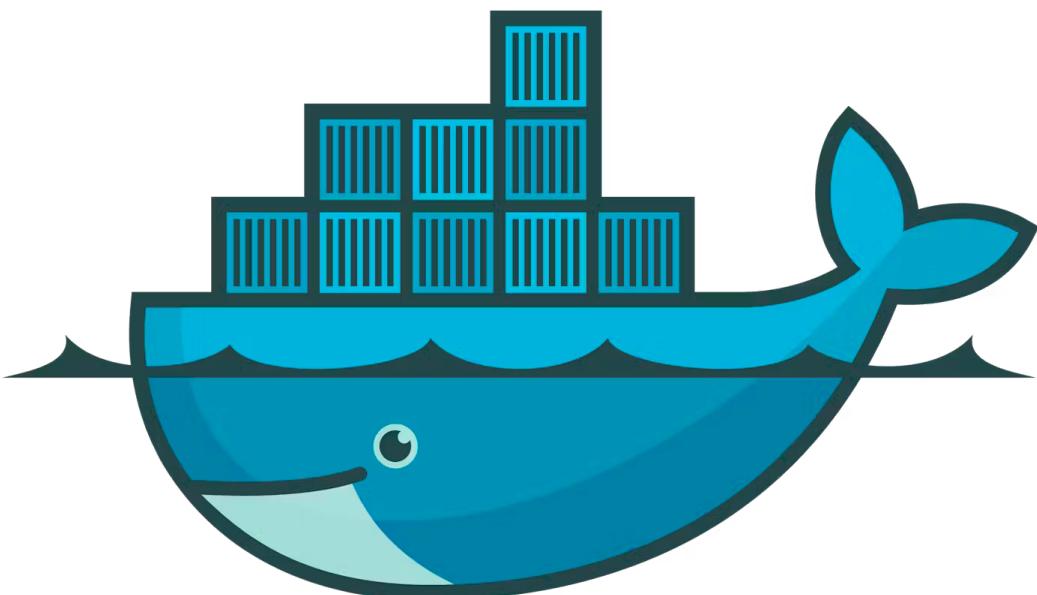

## Table of contents

[What is Docker?](#)

[Why use Docker?](#)

[How does it work?](#)

[Docker Architecture](#)

[Docker daemon](#)

[Subscribe](#)

Docker client

Docker registries

Dockerfile

Dockerfile Example

Docker Image

Basic Commands

Listing Hash Values of Docker Images

Containers

Basic Commands

Recap with Demo:

What now?

Has it ever happened with you that you create an application which runs like a charm on your machine but when you pass it on to someone else, for some reason it doesn't quite work on their machine?

## What is Docker?


Docker is a container platform that allows you to build, test and deploy applications quickly. A developer defines all the applications and its dependencies in a Dockerfile which is then used to build Docker images that defines a Docker container. Doing this ensures that your application will run in any environment.

## Why use Docker?

Using Docker can help you ship your code faster, gives you control over your applications. You can deploy applications on containers that make it easier for them to be deployed, scaled, perform rollbacks and identify issues. Docker also helps in saving money by utilizing resources. Docker-based applications can be seamlessly moved from local development machines to production


 [Subscribe](#)

deployments. You can use Docker for Microservices, Data Processing, Continuous Integration and Delivery, Containers as a Service.

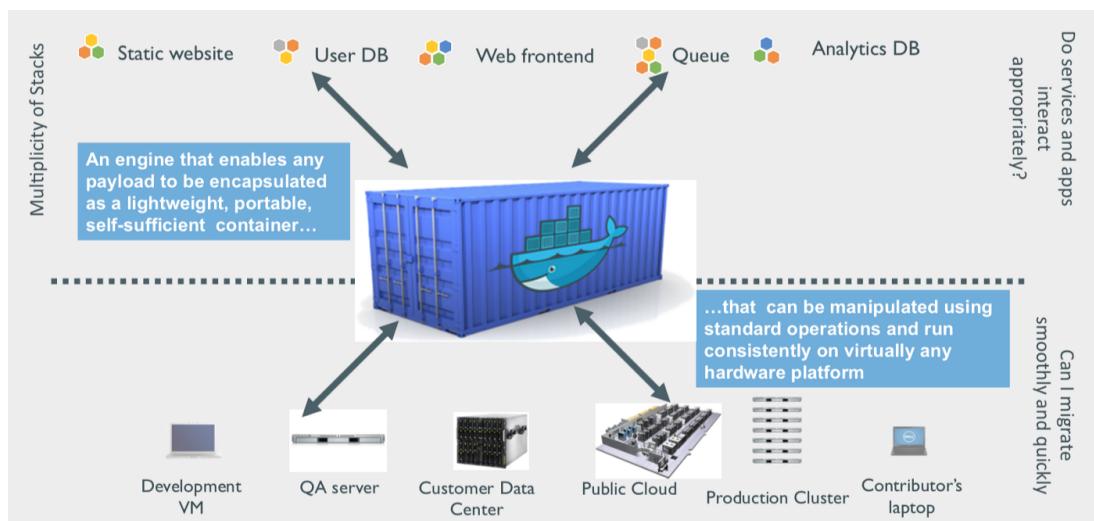

## How does it work?

### Containerization vs Virtualization

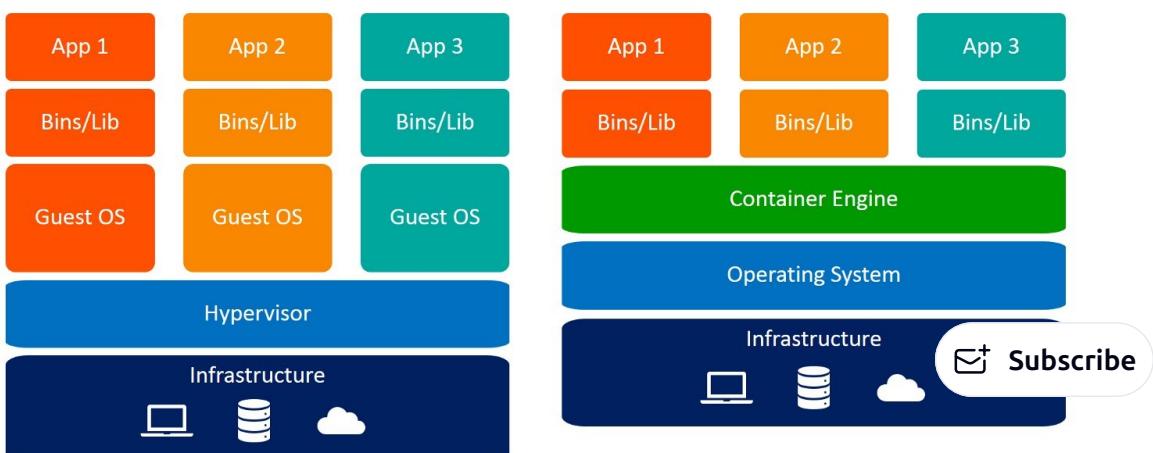


## Virtual Machines

## Containers

An application on a VM requires a guest OS and thus an underlying hypervisor to run. Hypervisor is used to create multiple machines on a host operating system and it manages virtual machines. These virtual machines have their own operating system and do not use the host's operating system. They have some space allocated. In the software world, containerization is an efficient method for deploying applications. A container encapsulates an application with its own operating environment. It can be placed on any host machine without special configuration, removing the issue of dependencies. VM is hardware virtualization, whereas containerization is OS virtualization. In comparison, virtualization is the creation of a virtual version of something such as an operating system, server or a storage device or network resources. Essentially, containerization is a lightweight approach to virtualization.

## Docker Architecture

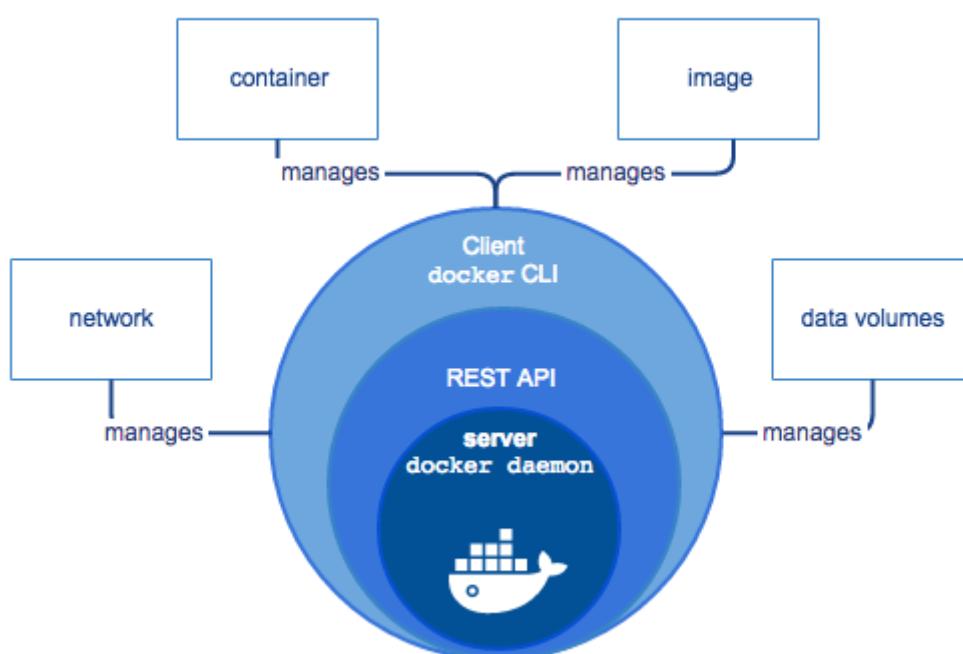

Docker uses a client-server architecture. The Docker client talks to the Docker daemon, which does the heavy lifting of building, running, and distributing your Docker containers.

For download and installation refer: <https://docs.docker.com>

[Subscribe](#)

## Docker daemon

It listens to the API requests being made through the Docker client and manages Docker objects such as images, containers, networks, and volumes.

## Docker client

This is what you use to interact with Docker. When you run a command using docker, the client sends the command to the daemon, which carries them out. The Docker client can communicate with more than one daemon.

## Docker registries

This is where Docker images are stored. Docker Hub is a public registry that anyone can use. When you pull an image, Docker by default looks for it in the public registry and saves the image on your local system on DOCKER\_HOST. You can also store images on your local machine or push them to the public registry.

## Dockerfile

Describes steps to create a Docker image. It's like a recipe with all ingredients and steps necessary in making your dish. This file can be used to create Docker Image. These images can be pulled to create containers in any environment. These images can also be stored online at docker hubs. When you run docker image you get docker containers. The container will have the application with all its dependencies.

- Create a file named 'Dockerfile'
- By default on building, docker searches for 'Dockerfile' \$ docker build -t myimage:1.0 .
- During building of the image, the commands in RUN section of Dockerfile will get executed. \$ docker run ImageID
- The commands in CMD section of Dockerfile will get executed when you create a container out of the image.

## Dockerfile Example

```
FROM ubuntu
MAINTAINER kunal kushwaha <kunal@gmail.com>
```

 [Subscribe](#)

```
RUN apt-get update  
CMD ["echo", "Hello World"]
```


## Docker Image

A Docker Image is a file that defines a Docker Container. It is similar in concept to a snapshot of a VM. A container that moves from one Docker environment to another with the same OS will work without changes because the image includes all of the dependencies needed to execute the code. Docker Image is run to create a docker container. Images are immutable. Once built, the files making up an image do not change. Images can be stored locally or remote locations like hub.docker.com.

### Basic Commands

```
$ docker pull ubuntu:18.04 (18.04 is tag/version (explained below))  
$ docker images (Lists Docker Images)  
$ docker run image (creates a container out of an image)  
$ docker rmi image (deletes a Docker Image if no container is using it)  
$ docker rmi $(docker images -q) (deletes all Docker images)
```

Docker can build images automatically by reading instructions from a DockerFile. A single image can be used to create multiple containers.

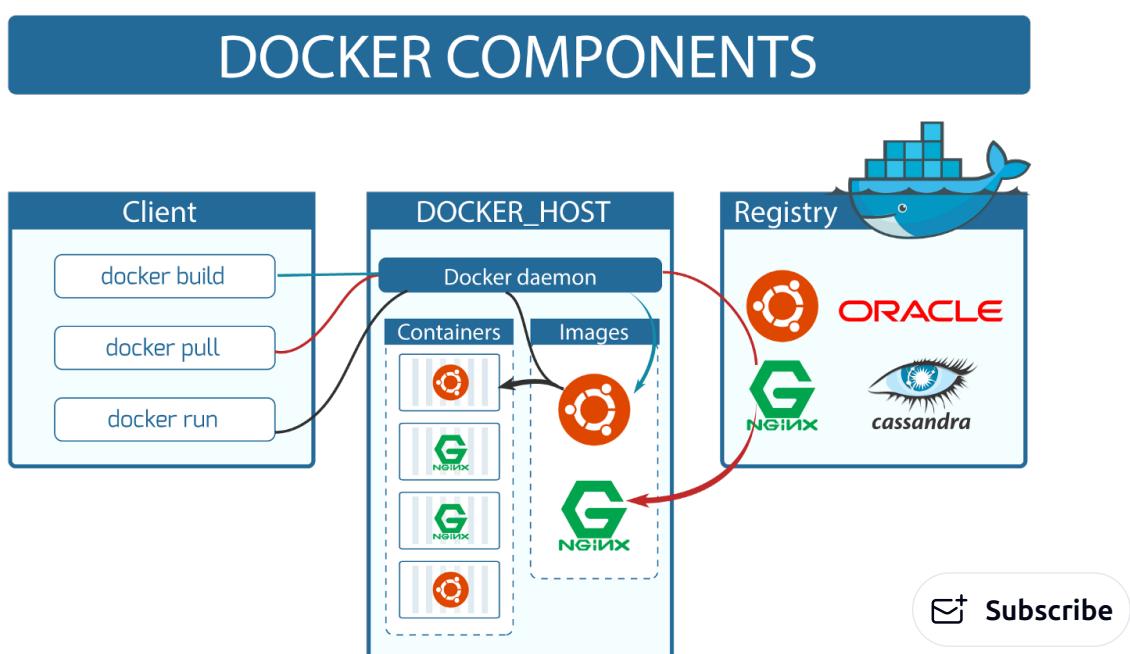

Images are built in layers. Each layer is an immutable file, but is a collection of files and directories. The last layer can be used to write out data to. Layers receive an ID, calculated via a SHA 256 hash of the layer contents. Thus, if the layer contents change- Notice the IMAGE ID below and the Hash Values given above, the first 12 characters of the hash are equal to the IMAGE ID, the SHA 256 hash changes as well. Note: The Image ID listed by docker commands (ie 'docker images') is the first 12 characters of the hash. These hash values are referred to by 'tag' names.

### **Listing Hash Values of Docker Images**

```
$ docker images -q --no-trunc  
sha256:3556258649b2ef23a41812be17377d32f568ed9f45150a26466d2ea2  
sha256:9f38484d220fa527b1fb19747638497179500a1bed8bf0498eb78822  
sha256:fce289e99eb9bca977dae136fbe2a82b6b7d4c372474c9235adc1741
```

- Notice the IMAGE ID below and the Hash Values given above, the first 12 characters of the hash are equal to the IMAGE ID

```
$ docker images  
REPOSITORY      TAG      IMAGE ID  
ubuntu          18.04    3556258649b2  
centos          latest    9f38484d220f  
hello-world     latest    fce289e99eb9
```

The format of a full tag name is: [REGISTRYHOST/] [USERNAME/] NAME[:TAG]  
For Registry Host 'registry.hub.docker.com' is inferred. For ':TAG' — 'latest' is default, and inferred Example: registry.hub.docker.com/mongo:latest

## **Containers**





A container is a runnable instance of an image. This is where your application is running. You can manage containers using the Docker API or CLI. You can connect a container to one or more networks, attach storage to it, or even create a new image based on its current state. If we delete a container the data will be lost! Because when the container went down and we brought it back up, the last layer got created again as a new layer. This helps in development if you don't want to store record for each test. To be persistent, use volumes to store data.

```
$ docker inspect ubuntu:18.04
"RootFS": {
    "Type": "layers",
    "Layers": [
        "sha256:543791078bdb84740cb5457abbea10d96dac3dea8c07d6dc173f734",
        "sha256:c56e09e1bd18e5e41afb1fd16f5a211f533277bdae6d5d8ae96a248",
        "sha256:a31dbd3063d77def5b2562dc8e14ed3f578f1f90a89670ae620fd62",
        "sha256:b079b3fa8d1b4b30a71a6e81763ed3da1327abaf0680ed3ed9f00ad"
    ]
},
}
```

## Basic Commands

```
$ docker ps (list all containers)
$ docker run ImageName/ID (checks locally for image, if not ava
$ docker start ContainerName/ID
$ docker kill ContainerName/ID (Stops a running container)
$ docker rm ContainerName/ID (Deletes a stopped container)
$ docker rm $(docker ps -a -q) (Delete all stopped containers)
```

## Recap with Demo:

- Pulling an image from Docker registry

 [Subscribe](#)

```
$ docker images
REPOSITORY      TAG      IMAGE ID      CREATED      SIZE
$ docker pull ubuntu:18.04
18.04: Pulling from library/ubuntu
7413c47ba209: Pull complete
0fe7e7cbb2e8: Pull complete
1d425c982345: Pull complete
344da5c95cec: Pull complete
Digest:sha256:c303f19cfe9ee92badbbbd7567bc1ca47789f79303ddcef56
Status: Downloaded newer image for ubuntu:18.04
$ docker images
REPOSITORY      TAG      IMAGE ID      CREATED      SIZE
ubuntu          18.04    3556258649b2    9 days ago   64.1
```

- Running image to create container (-it stands for interactive mode)

```
$ docker run -it ubuntu:18.04
root@4183618bcf17:/# ls
bin boot dev etc home lib lib64 media mnt opt proc root run sbi
root@4183618bcf17:/# exit
exit
```

- Listing Containers

```
$ docker ps -a
CONTAINER ID      IMAGE      COMMAND      CREATED      STATUS
4183618bcf17    ubuntu:18.04 "/bin/bash"  4 minutes ago  Exi
```

## What now?

Imagine you have a large number of containers running and it's getting difficult to manage all of them. The answer? Container-orchestration system. It helps in automating application deployment, scaling, and management. One of the very widely used COE is Kubernetes.

 [Subscribe](#)

#docker

#devops

Written by

**Kunal Kushwaha**

Building a better future through technology and innovation.

## Comments (17)

[Discuss on Hashnode](#)**Sai prashanth**

I have never seen such a person working hard for Stranger's, By creating playlist's video on youtube with proper manner and with Hearlty Responsibility and open sources like notes on GitLab, and to gain knowledge from community classroom and Doutes to clear on coding from Discord. there are a lot many more, keep it up Kunal, You doing a great job.

10 likes

**Aniket Kadale**

Nice content Kunal 🎉 I have also started writing articles on technology and coding, have a look once - [TechWithAndy](#)

5 likes

 [Subscribe](#)**Shantanu Bangar**

i came here from devops bootcamp docker lecture i can say he has done great work in absolutely simplifying docker concept for beginners, loved it .

 **victor olah**

very well explained and straight to the point

 **shubham joshi**

Precise, great work!

 **sunny suri**

Your blog is really good man



**BUSHRA NAZISH**

Really informative and precise Blog. Thank you so much for posting it and even explaining it by referring during the video tutorial on YouTube. For a beginner, you have set quite a nice stage to get dive deep into it. Great job Kunal Kushwaha :)



**omkar kulkarni**

 **Subscribe**

Just watched the Docker tutorial on YouTube. Really helpful it is and explained throughout the video. From a beginner's point of view such a helpful deep dive into it. Thanks a lot Kunal Kushwaha for posting :)



**ayush**

Many concepts are clear after reading this blog.



**Dinesh Silwal**

Thanks kunal !



**Sumanta Mohanta**

It is too much better...



**Vedant Mahajan**

Relevant and trustworthy content explained in simple words!!



**Aditya Maheshwari**

Awesome

**Subscribe**

**Amit Kushwaha**

very mocly explained docker!!!

**HARSH VARDHAN SINGH**

Amazed with the explanation. Thank you so much kunal

**Mayank Kumar**

nice

**Himanshu Choudhary**

Man! just amazing. 🔥 Literally No words .

**Subscribe**

**Socials**[YouTube](#)[Twitter](#)[LinkedIn](#)[Instagram](#)**Other**[GitHub](#)[Reddit](#)[YouTube Hindi](#)[Credly](#)**Resources**[Home](#)[Blog](#)[Sponsorships](#)[Courses](#)

---

© 2024 Kunal Kushwaha. All rights reserved.

