



H3: the identical per-neuron embedding is computed for three encoders (self-supervised · supervised · random)

1. frame → encoder → average over footprint

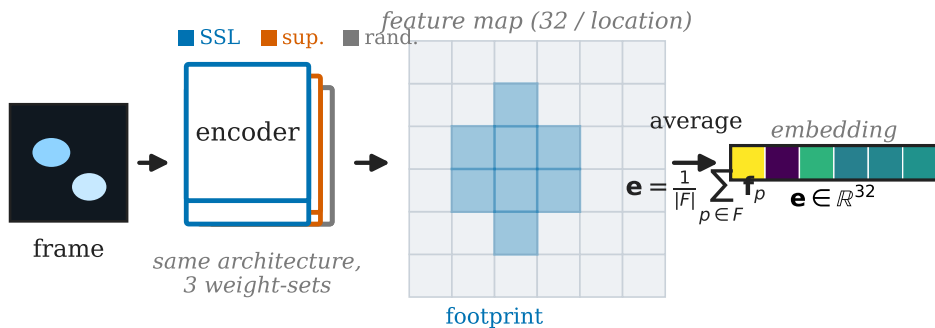


2. cosine similarity, within vs between

within-neuron (same neuron, different frames)



between-neuron (different neurons, same frame)

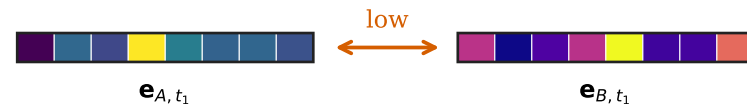

gap = within – between (reported per encoder)