


Main grid, scale+thin: per-context search ($B = 20 \dots 4800$, evaluations include the operators) vs amortized methods

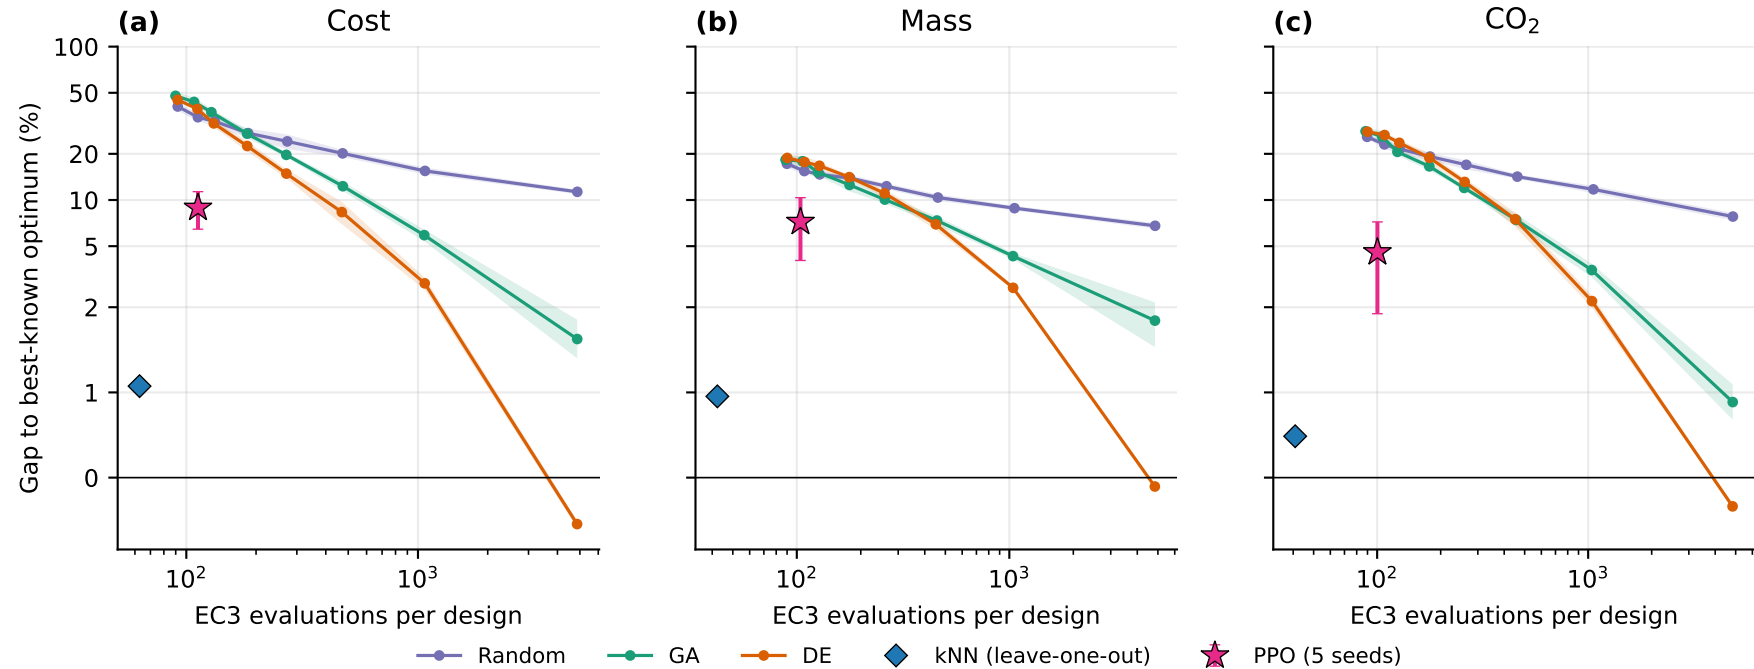

The kNN needs solved labelled contexts beforehand (cost in Fig. 4); PPO and the searches need none.