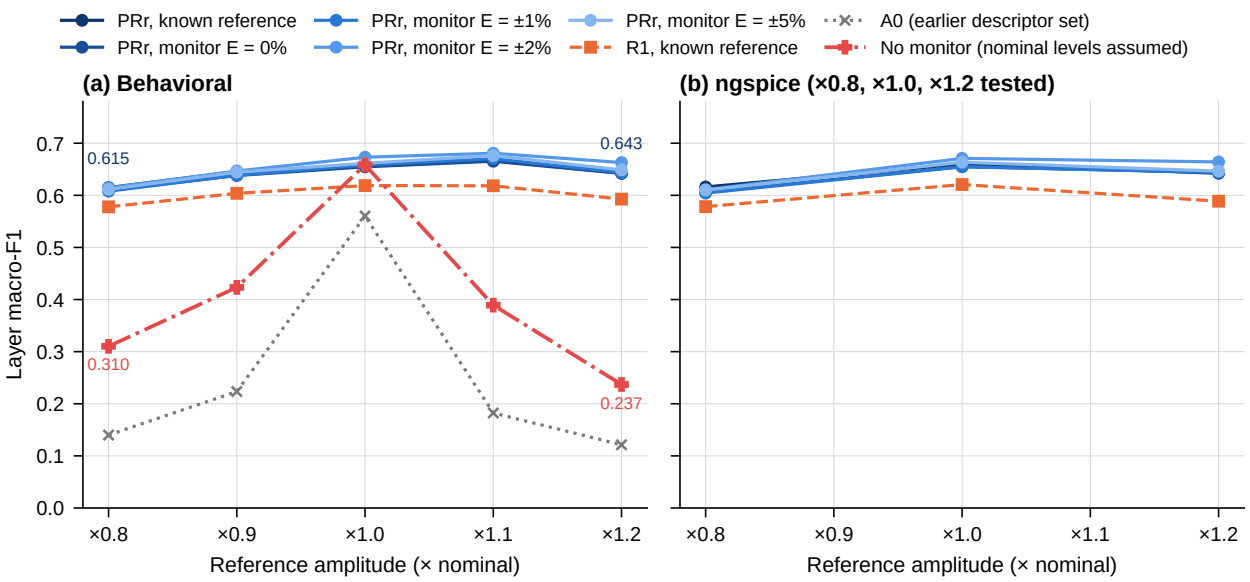
PRr, known reference
PRr, monitor E = 0%
PRr, monitor E = ±1%
PRr, monitor E = ±2%
PRr, monitor E = ±5%
R1, known reference
A0 (earlier descriptor set)
No monitor (nominal levels assumed)
(a) Behavioral
(b) ngspice (×0.8, ×1.0, ×1.2 tested)
Layer macro-F1
0.615
0.643
0.310
0.237
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
×0.8
×0.9
×1.0
×1.1
×1.2
Reference amplitude (× nominal)
Reference amplitude (× nominal)