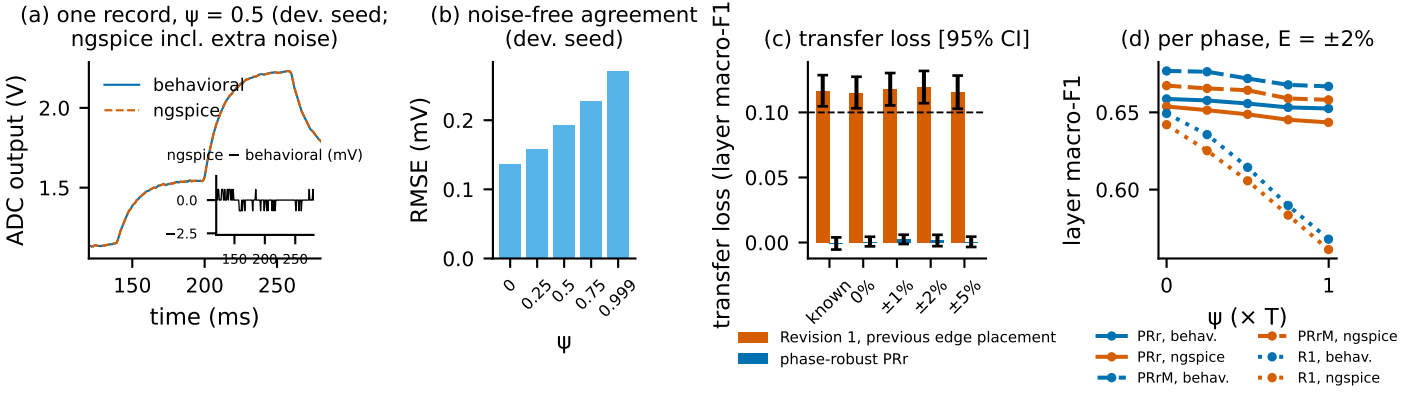
(a) one record, ψ = 0.5 (dev. seed; ngspice incl. extra noise)
behavioral
ngspice
ngspice − behavioral (mV)
ADC output (V)
time (ms)
(b) noise-free agreement (dev. seed)
RMSE (mV)
ψ
(c) transfer loss [95% CI]
transfer loss (layer macro-F1)
known
0%
±1%
±2%
±5%
Revision 1, previous edge placement
phase-robust PRr
(d) per phase, E = ±2%
layer macro-F1
ψ (× T)
PRr, behav.
PRr, ngspice
PRrM, behav.
PRrM, ngspice
R1, behav.
R1, ngspice