


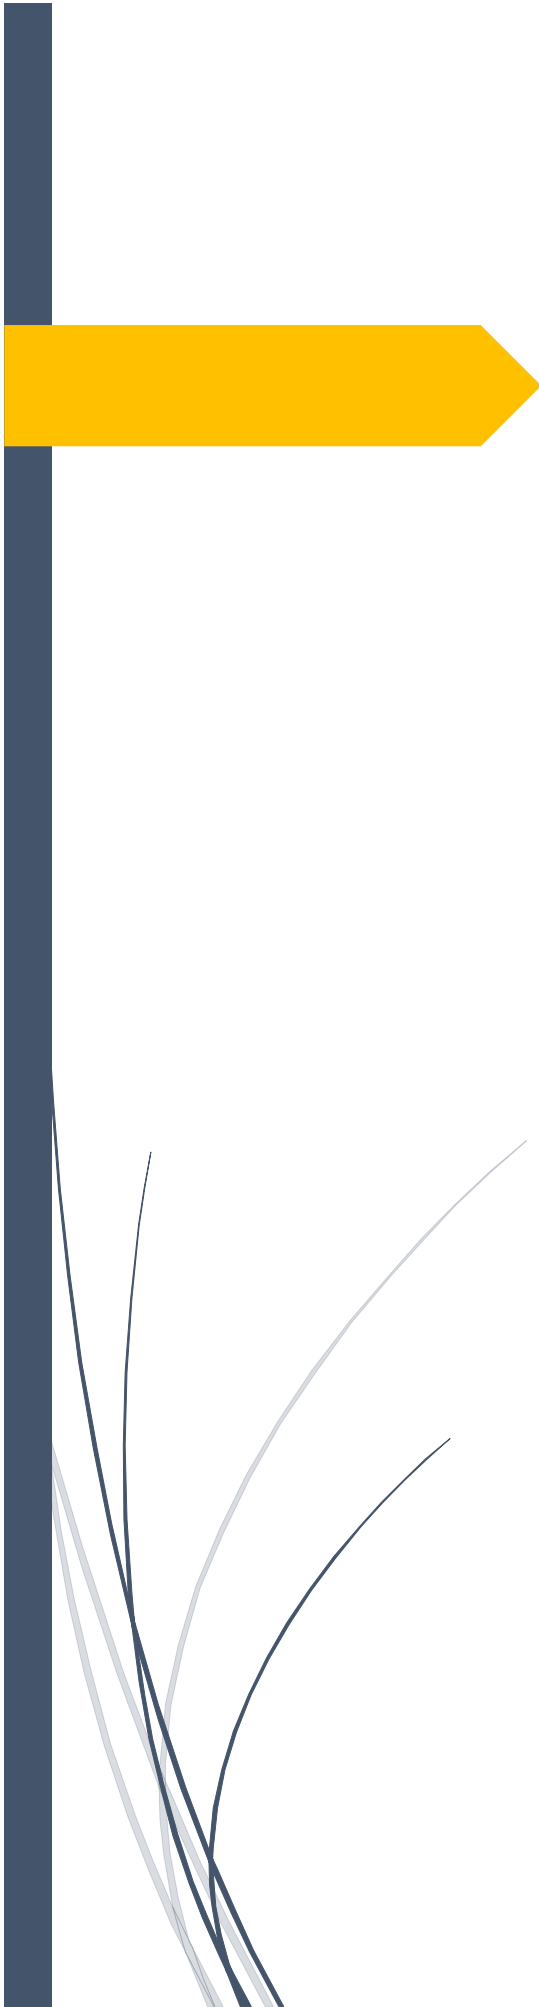

WhySMS API Documentation

Version:202207-2

Ahmed Magdy
WHYSMS

Table of Contents

SMS API	2
API Endpoint	2
Parameters.....	2
Send outbound SMS	3
API Endpoint	3
Parameters.....	3
Example request for Single Number	3
Example request for Multiple Numbers	4
Returns.....	4
View an SMS	5
API Endpoint	5
Parameters.....	5
Example request	5
Returns.....	5
View all messages	6
API Endpoint	6
Example request	6
Returns.....	6

SMS API

WhySMS SMS API allows you to send and receive SMS messages to and from any country in the world through a REST API. Each message is identified by a unique random ID so that users can always check the status of a message using the given endpoint.

API Endpoint

<https://bulk.whysms.com/api/v3/sms/send>

Parameters

PARAMETER	REQUIRED	DESCRIPTION
Authorization	YES	When calling our API, send your API token with the authentication type set as Bearer (Example: Authorization: Bearer {api_token})
Accept	YES	Set to application/json

Send outbound SMS

WhySMS's Programmable SMS API enables you to programmatically send SMS messages from your web application. First, you need to create a new message object. WhySMS returns the created message object with each request.

Send your first SMS message with this example request.

API Endpoint

<https://bulk.whysms.com/api/v3/sms/send>

Parameters

PARAMETER	REQUIRED	TYPE	DESCRIPTION
recipient	YES	string	Number to send message. Use comma (,) to send multiple numbers. Ex. 31612345678,8801721970168
sender_id	YES	string	The sender of the message. This can be a telephone number (including country code) or an alphanumeric string. In case of an alphanumeric string, the maximum length is 11 characters.
type	YES	string	The type of the message. For text message you have to insert plain as sms type.
message	YES	string	The body of the SMS message.
schedule_time	NO	datetime	The scheduled date and time of the message in RFC3339 format (Y-m-d H:i)

Example request for Single Number

PHP

```
curl -X POST https://bulk.whysms.com/api/v3/sms/send \
-H 'Authorization: Bearer 49|LNFe8WJ7CPtv12mzowAB4114enbFR0XGgnQh2qWY' \
-H 'Content-Type: application/json' \
-H 'Accept: application/json' \
-d '{
  "recipient": "31612345678",
  "sender_id": "YourName",
  "type": "plain",
  "message": "This is a test message"
}'
```

Example request for Multiple Numbers

PHP

```
curl -X POST https://bulk.whysms.com/api/v3/sms/send \  
-H 'Authorization: Bearer 49|LNFe8WJ7CPtv12mzowAB41l4enbFR0XGgnQh2qWY' \  
-H 'Content-Type: application/json' \  
-H 'Accept: application/json' \  
-d '{  
  "recipient": "31612345678,880172145789",  
  "sender_id": "YourName",  
  "type": "plain",  
  "message": "This is a test message",  
  "schedule_time": "2021-12-20 07:00"  
}'
```

Returns

Returns a contact object if the request was successful.

JSON

```
{  
  "status": "success",  
  "data": "sms reports with all details",  
}
```

If the request failed, an error object will be returned.

JSON

```
{  
  "status": "error",  
  "message": "A human-readable description of the error."  
}
```

View an SMS

You can use WhySMS's SMS API to retrieve information of an existing inbound or outbound SMS message.

You only need to supply the unique message id that was returned upon creation or receiving.

API Endpoint

<https://bulk.whysms.com/api/v3/sms/{uid}>

Parameters

PARAMETER	REQUIRED	TYPE	DESCRIPTION
uid	YES	string	A unique random uid which is created on the WhySMS platform and is returned upon creation of the object.

Example request

PHP

```
curl -X GET https://bulk.whysms.com/api/v3/sms/606812e63f78b \  
-H 'Authorization: Bearer 49|LNFe8WJ7CPtv12mzowAB41l4enbFR0XGgnQh2qWY' \  
-H 'Content-Type: application/json' \  
-H 'Accept: application/json' \
```

Returns

Returns a contact object if the request was successful.

JSON

```
{  
  "status": "success",  
  "data": "sms data with all details",  
}
```

If the request failed, an error object will be returned.

JSON

```
{  
  "status": "error",  
  "message": "A human-readable description of the error."  
}
```

View all messages

API Endpoint

<https://bulk.whysms.com/api/v3/sms/>

Example request

PHP

```
curl -X GET https://bulk.whysms.com/api/v3/sms \  
-H 'Authorization: Bearer 49|LNFe8WJ7CPtv12mzowAB41l4enbFR0XGgnQh2qWY' \  
-H 'Content-Type: application/json' \  
-H 'Accept: application/json' \
```

Returns

Returns a contact object if the request was successful.

JSON

```
{  
  "status": "success",  
  "data": "sms reports with pagination",  
}
```

If the request failed, an error object will be returned.

JSON

```
{  
  "status": "error",  
  "message": "A human-readable description of the error."  
}
```