


IS2 - walk through

IS2 data is provided on different processing levels, the higher the number the more *processed* the data is.

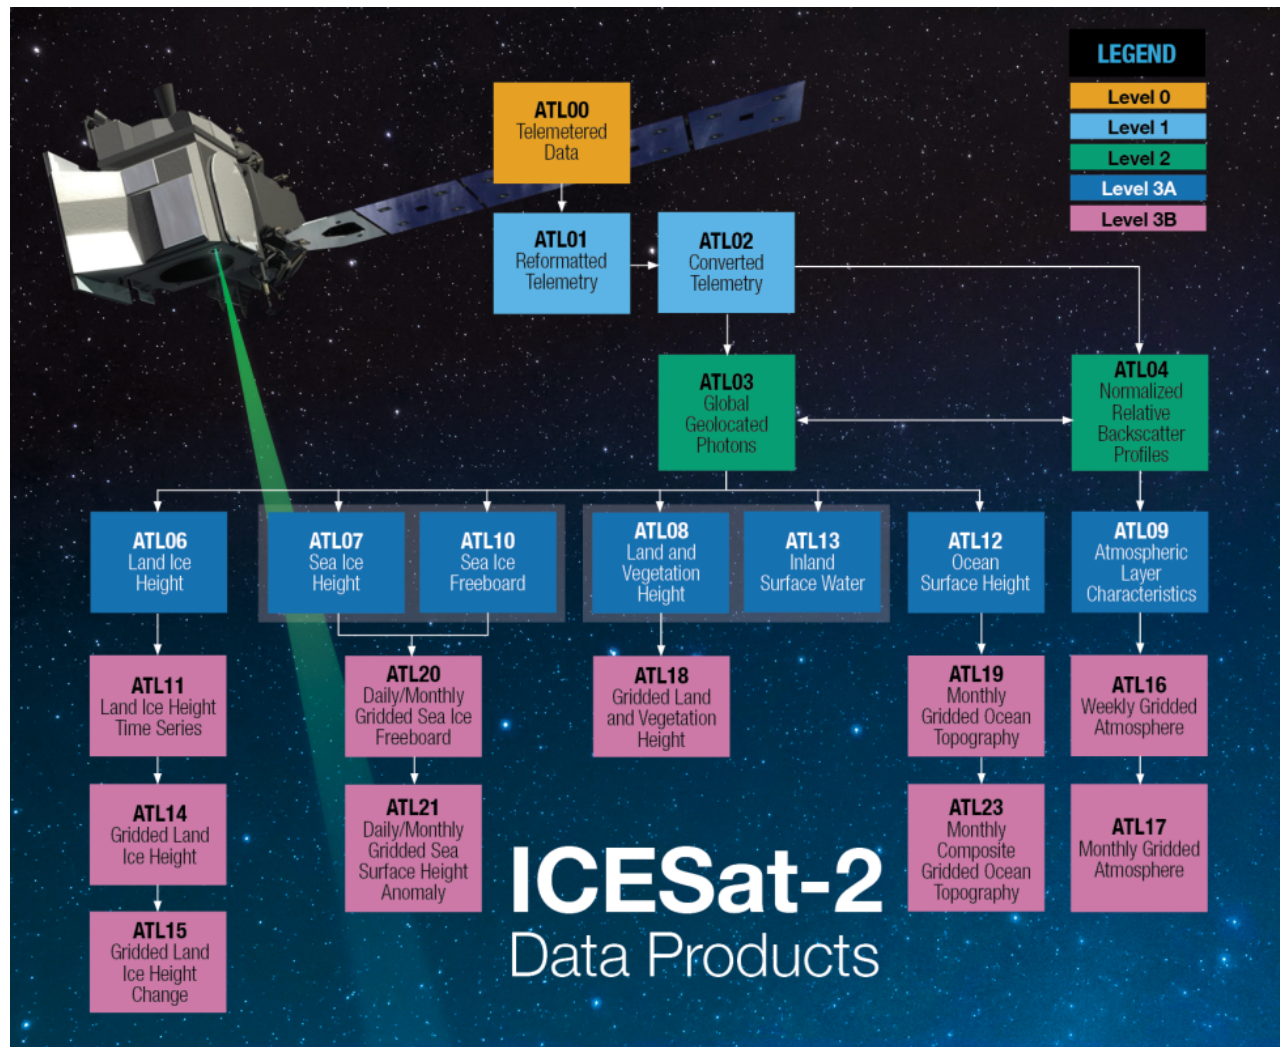

Naming conventions:

NASA's referencing system is

ATL03-01_20190323035632_12940201_002_01

ATL10-01_20190323035632_12940201_002_01

my reference is the track_name, or ID_name:

NH_20190323_12940203

- ATL06_20181014001920_02350103_001_01.h5
- ATL06_[yyyymmdd][hhmmss]_[tttccss]_[vvv_rr].h5

The following table describes the file naming convention variables:

Table 2. File Naming Convention Variables and Descriptions

Variable	Description
ATL06	ATLAS/ICESat-2 L3A Land Ice Height product
yyyymmdd	Year, month, and day of data acquisition
hhmmss	Hour, minute, and second of data acquisition (UTC)
tttt	Reference Ground Track. The ICESat-2 mission has 1,387 RGTs, numbered from 0001 to 1387.
cc	Cycle Number. Each of the 1,387 RGTs is targeted in the polar regions once every 91 days. The cycle number tracks the number of 91-day periods that have elapsed since ICESat-2 entered the science orbit.

[ATLAS/ICESat-2 L3A Land Ice Height - ATL06-V003-UserGuide.pdf](#)

loading data at each processing step

- at the beginning of each file:

```
#track_name, batch_key, test_flag = io.init_from_input(sys.argv) # loads standard experiment
## or, manual loading:
track_name, batch_key, test_flag = 'NH_20190301_09580203', 'NH_batch05', False
#track_name, batch_key, test_flag = 'SH_20190101_00630212', 'SH_batch04', False

#old version:
#track_name, batch_key, test_flag = '20190605061807_10380310_004_01', 'SH_batch01', False
```

then we can load the respective data:

```
hemis, batch = batch_key.split('_')
ATlevel= 'ATL03'
load_path = mconfig['paths']['work'] + '/' + batch_key + '/B01_regrid/'

# open with hdf5
Gd = h5py.File(load_path + '/' + track_name + '_B01_binned.h5', 'r')
```