

Modality Documentation

Table of Contents

Introduction	2
What is Modality?	2
Why the name?	2
Development progress	2
Open-source	2
The Modality Architecture	2
Java for the Web	2
Technologies	3
Layers	3
All-Layer Aggregation	5
The Modality Apps	5
Web apps	5
Mobile apps	5
Desktop apps	5
Installation	5
1. Install Java JDK	5
2. Install WebFX CLI	6
3. Install IntelliJ IDEA	6
4. Install Docker	6
5. Install Git	6
6. Create the Modality root	6
7. Clone the codebase	6
8. Prepare Docker environment variables	7
9. Build the Docker containers	7
10. Start the containers to build the database	7
Configure Modality for Development	7
Create Run Configuration for Modality Server	7
Create Run Configuration for Back-Office Desktop client	9
Create Run Configuration for Back-Office Web client	10
Create Run Configuration for Front-Office Mobile client	10
Create Run Configuration for Front-Office Web client	10
Run Modality on Development	10
Ensure Docker is running *	11
Build & run Modality Server *	11
Build & run Back-Office Desktop client	11
Build & open Back-Office Web client	12

Build & run Front-Office Mobile client	13
Build & open Front-Office Web client	13
Modality Database	13
Modality Development Database	14
Modality Session	14
Using Docker	14
Connect to the Docker database container	14
Connect to the Docker session container	15
Shut down Docker	15
Destroy & rebuild the Docker containers	15
Deploy Modality to Heroku	15

Introduction

What is Modality?

Modality is an open-source, Java-based, hospitality-oriented booking system. Multiple organisations, events and properties are supported, together with a wide range of hospitality-related add-ons, such as meals, transport, translation, special needs and more.

Why the name?

'Modality' is a fusion of two words, 'modular' and 'hospitality', a nod to both the software's design and purpose.

Development progress

Modality is in the very early stages of active development. Whilst the server and data models are complete, the clients have significant work remaining before they are viewable. Currently only the Back-Office Desktop client (described below) can be compiled and run successfully from the IDE.

Open-source

Modality is licensed under the [Apache License Version 2.0](#), is completely free to use and modify, and is available on [GitHub](#).

The Modality Architecture

Java for the Web

Modality is the first large-scale Java project to use [WebFX](#) - a toolkit that transpiles JavaFX applications into pure JavaScript web apps for direct execution in the browser.

Technologies

Modality is developed using the following technologies:

Technology	Purpose	Version
Java	Codebase	18
JavaFX	Desktop + mobile user interfaces	18
WebFX	Web user interfaces	Latest (Beta)

...consists of three end-user client applications:

Application	Used By	Compilation Toolchain
Front-Office Mobile	Customer	Gluon
Front-Office Web	Customer	WebFX + GWT
Back-Office Web	Administrator	WebFX + GWT

...two developer client applications:

Application	Used By	Compilation Toolchain
Back-Office Desktop	Developer	JavaFX
Front-Office Desktop	Developer	JavaFX

...one web server:

Application	Purpose	Version
Vert.x	Interface between client apps and back-end services; serves the SPA	Latest

...and depends on the following services:

Service	Purpose	Version
Postgres	Database	14.2
Redis	Session management	6.2.6
Flyway	Database schema updates	Latest

The services are orchestrated by [Docker](#) when running Modality on development machines (instructions given later in this document).

Layers

Modality is divided into layers of functionality, shown below:

Layer	Repository	Java Modules
Business Logic (top layer)	modality	modality-event, modality-hotel, modality-restaurant, modality-catering
Ecommerce	modality	modality-ecommerce
CRM	modality	modality-crm
Base	modality	modality-base
WebFX Stack	webfx-stack	webfx-stack
WebFX (bottom layer)	webfx	webfx-kit

Business logic

The highest layer of the architecture consists of business-specific modules implementing logic for events, hotels, restaurants etc. This is a customisable layer, and developers can choose to add only the modules they need, as well as provide their own.

Ecommerce

The next layer down is the ecommerce layer. This provides a generic domain model for ecommerce, which models sales, accounts etc. It is the location for payment gateway integration and ecommerce-specific UIs.

CRM

The CRM layer provides the essential CRM features, including customer accounts, integrated mailing system etc.

Base

The Base layer is a fully operational implementation of the WebFX Stack layer beneath, based on the Postgres database. This layer is a pure technical solution that isn't bound to any specific domain, and so is large in application scope.

WebFX Stack

The WebFX Stack layer provides an opinionated framework for developing enterprise applications with WebFX. This layer is responsible for communication between client and server (using a WebSocket bus), UI routing, ORM, push notification, auth, i18n, etc. Interfaces in all cases, but not always full implementations, allowing this layer to be adapted to any kind of system.

Unlike most Java frameworks, this layer works principally on the client side, following the trend initiated by mobile apps where most of the application code has been moved to the client and can run offline.

It is designed to work with JavaFX (for example, i18n provides JavaFX bindings for use with any kind of control; and the authorisation framework automatically enables/disables and shows/hides

controls depending on user access).

WebFX

WebFX is the foundation layer, providing a web port of JavaFX (in the webfx-kit module) that can be compiled by GWT together with your application code. It is a Java-based cross-platform solution that can be used in any domain.

All-Layer Aggregation

Modality ships with the `modality-all` module, which aggregates together the full set of modules across all layers, for use by developers right away.

The Modality Apps

Web apps

Modality uses WebFX to transpile its JavaFX codebase into a single-page application for direct execution in the browser. No server-side rendering, and no plugins required.

Mobile apps

Modality uses the [Gluon](#) toolchain to compile the codebase into native, installable apps ready for inclusion into the Google Play and Apple App stores.

Desktop apps

Modality also provides desktop apps, which have exactly the same UI as the web apps generated from the same source. This is useful for developers, allowing Java code to be rapidly developed and tested via the desktop, before subsequent transpilation into JavaScript and mobile (which takes time).

Installation

1. Install Java JDK

Modality is developed entirely in the Java language, and requires at least JDK 17+. Check whether this is installed:

```
java --version
```

If it is not installed, or is an older version, please refer to [this guide](#).

2. Install WebFX CLI

We use the WebFX CLI to compile Modality for the web. Please follow this [guide](#) to install it.

3. Install IntelliJ IDEA

We develop Modality using the free, community edition of [IntelliJ IDEA](#), and recommend you install this if you do not already have an IDE. IntelliJ allows you to easily compile and run the Modality server and clients, for the purpose of local development and testing.



All subsequent IDE-based examples given in this documentation will be based on IntelliJ.

4. Install Docker

During development, Modality uses Docker for all external services, including the database and the in-memory datastore for sessions.

Please install Docker on your local machine if you do not have it already. If using a Mac, the easiest way is to install using [brew](#). Please provide Docker with a minimum of 8GB of RAM, ideally more.



Insufficient RAM may result in `java.lang.OutOfMemoryError` errors when importing the [modality-dev-db](#).

5. Install Git

A git client is needed to retrieve the Modality codebase from GitHub. Check if git is installed:

```
git --version
```

If it is not installed, you may wish to refer to [this guide](#).

6. Create the Modality root

```
mkdir -vp modality
export MODALITY_ROOT=${PWD}/modality
```

7. Clone the codebase

Git clone the Modality codebase via the terminal (or IntelliJ etc):

```
cd $MODALITY_ROOT
git clone https://github.com/mongoose-project/modality.git .
```

8. Prepare Docker environment variables

Environment variables store the Postgres database name, username and password. Defaults are provided in the `.env-template`. Use this template file as the basis for your Docker-based configuration, by creating an `.env` file from it. You may leave the defaults, or provide new values accordingly:

```
cd $MODALITY_ROOT/docker
cp .env-template .env
source .env # make the environment variables available to the shell
```

9. Build the Docker containers

```
cd $MODALITY_ROOT/docker
docker-compose build --no-cache
```

10. Start the containers to build the database

```
cd $MODALITY_ROOT/docker
docker-compose up
```

The database scripts are stored in the `modality-base/modality-base-server-datasource/src/main/resources/db/` folder, and are executed sequentially by the [Flyway](#) database version control container.

Please allow several minutes for Flyway to complete. Once finished, you will now up and running with all the external services that Modality depends on.


Configure Modality for Development


Create Run Configuration for Modality Server

In order to run any of the Modality client applications, the Modality Server should first be running. The Modality Server is a [Vert.x](#) server that proxies requests to the database and is responsible for establishing and maintaining user sessions.

The easiest way to stand up the server locally is to create an application run configuration in your IDE.

In the IntelliJ menu, click **Run** → **Edit Configurations** to display the following dialog, and populate with the same details:

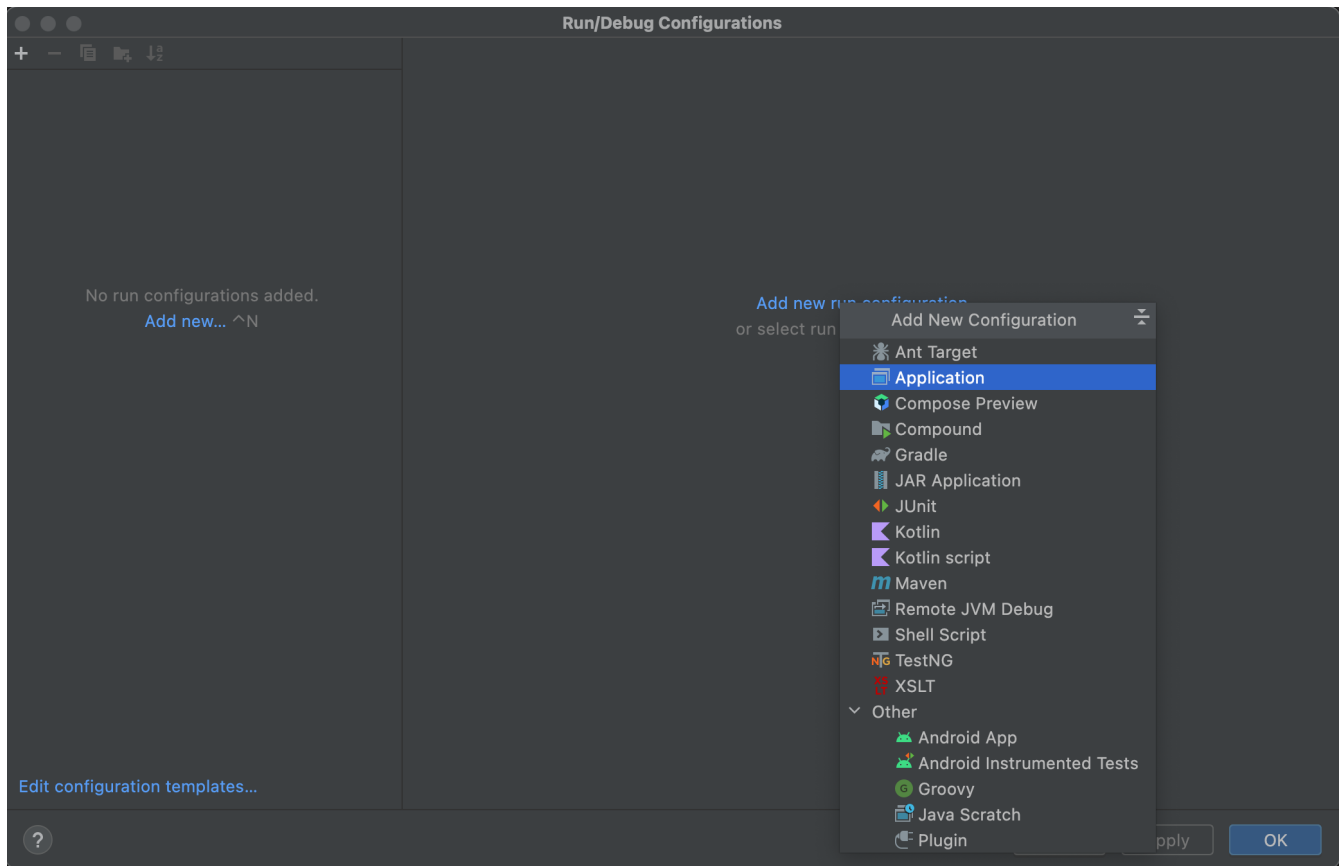

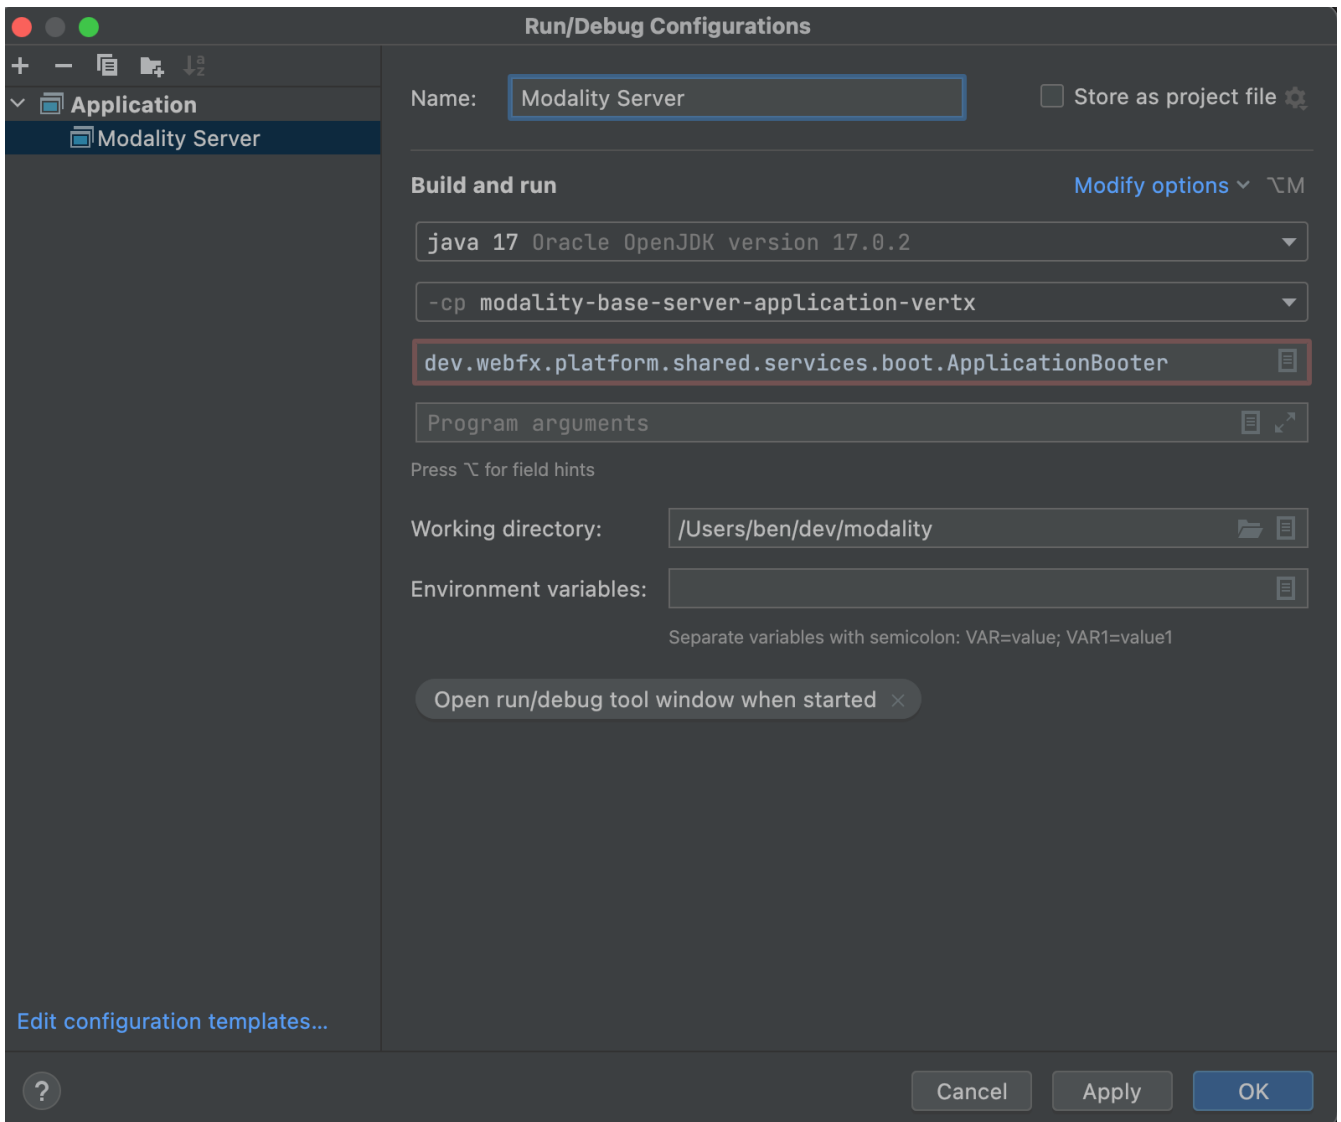


Click 'OK' to save the configuration and close the dialog.

Create Run Configuration for Back-Office Desktop client

The Back-Office Desktop client is an application used by developers of Modality, and emulates the web user interface used by administrators of the system.

Create another run configuration and populate it with the details given in the screenshot below:

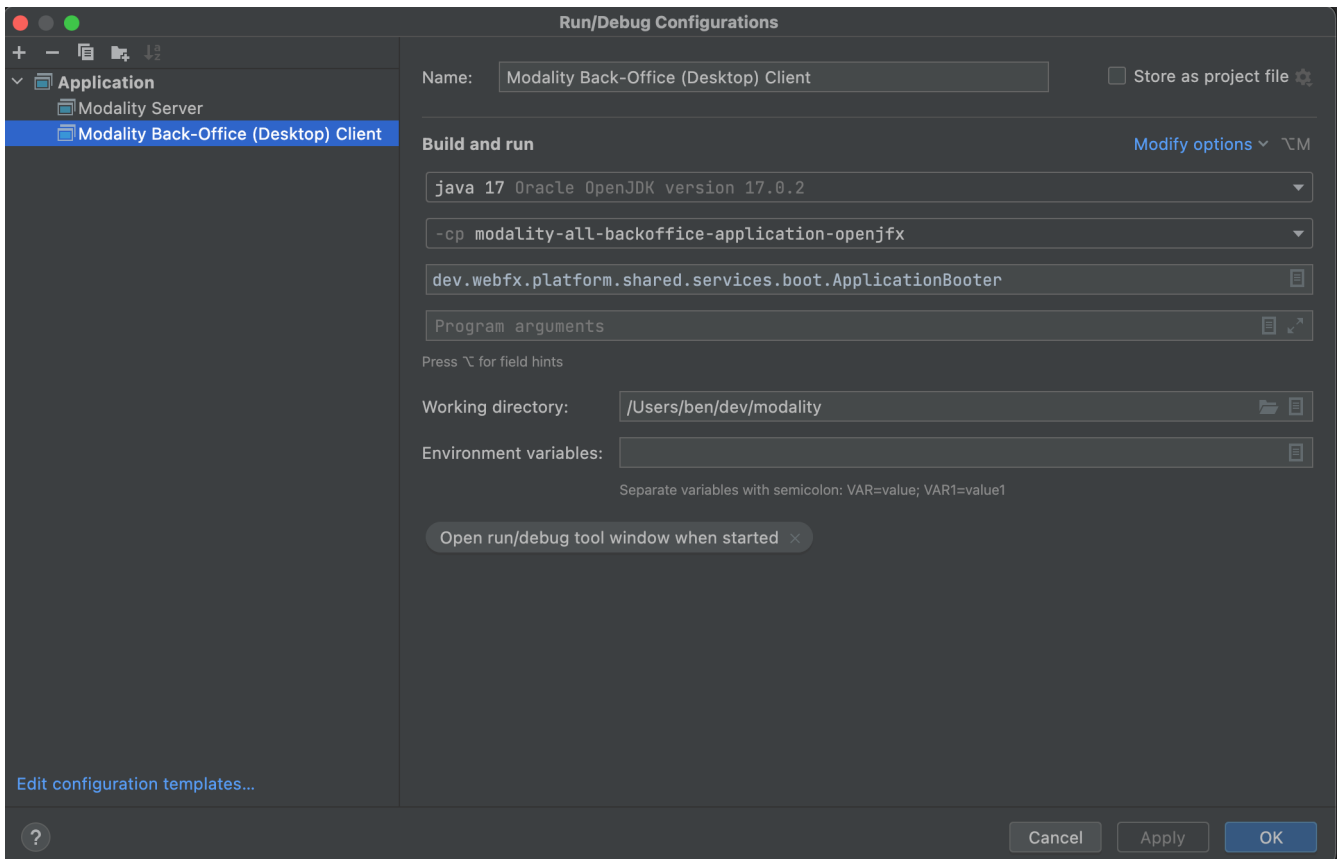

Click 'OK' to save the configuration and close the dialog.

Create Run Configuration for Back-Office Web client



We use the WebFX CLI to build web clients (described later), so no run configuration necessary.

Create Run Configuration for Front-Office Mobile client



The Front-Office Mobile client is not yet implemented.

Create Run Configuration for Front-Office Web client



The Front-Office Web client is not yet implemented.

Run Modality on Development


The Modality clients run independently of each other, but all require the Modality Server to be running, which in turn requires Docker to be running the service containers described above. Therefore, the first two steps below are mandatory before running one or more of the Modality clients locally.

Ensure Docker is running *

```
cd $MODALITY_ROOT/docker  
docker-compose up
```


Build & run Modality Server *

Build and run the server by executing its run configuration:

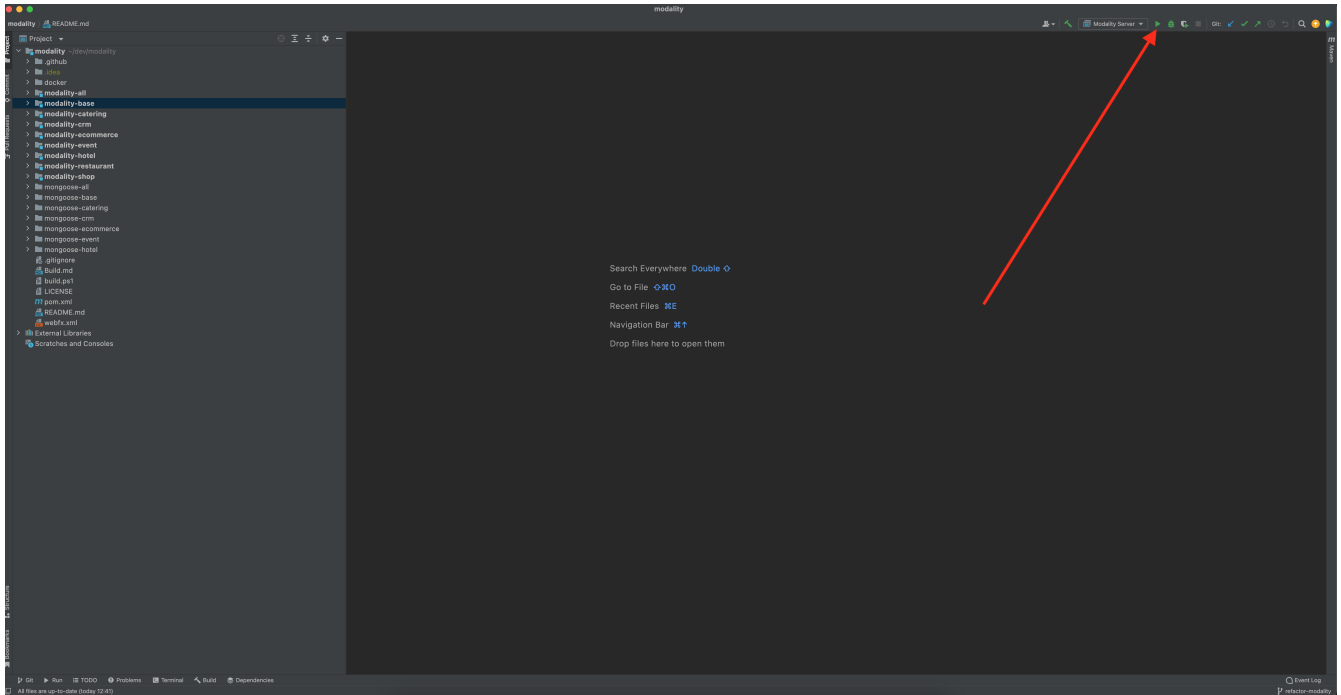


Build & run Back-Office Desktop client

Build and run the Back-Office Desktop client by executing its configuration:

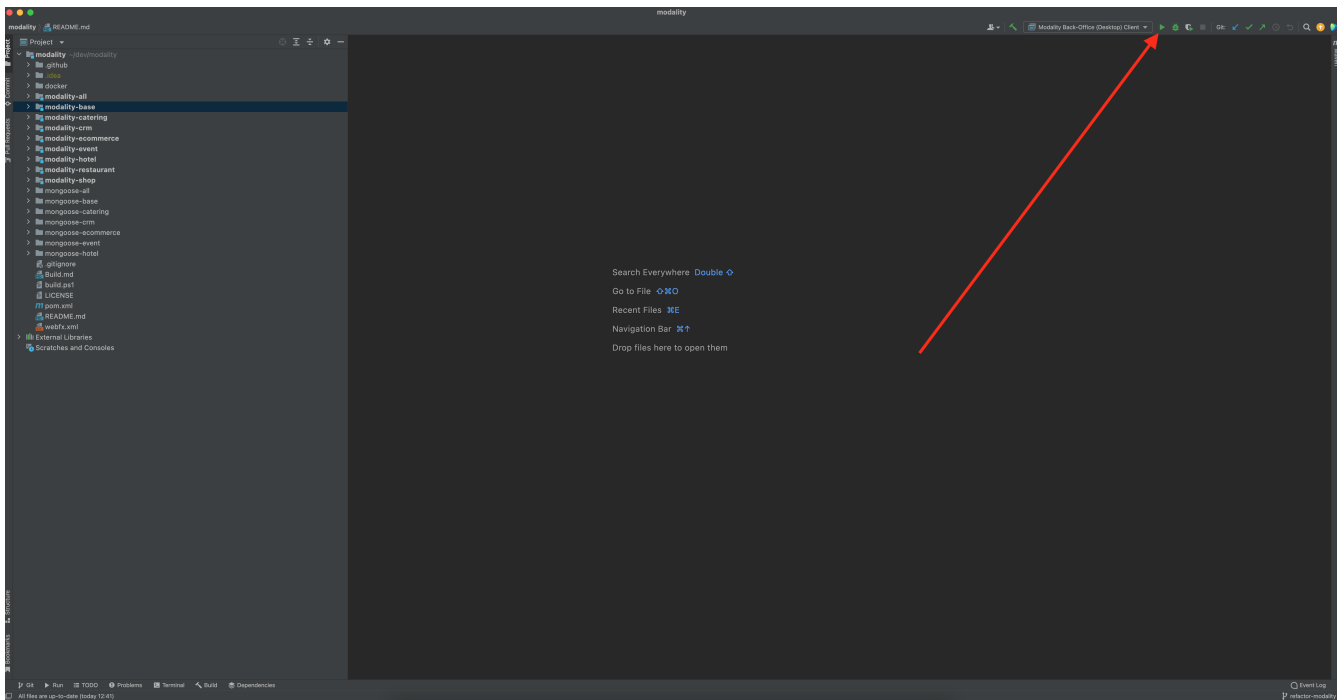

The Back-Office Desktop client should then display:

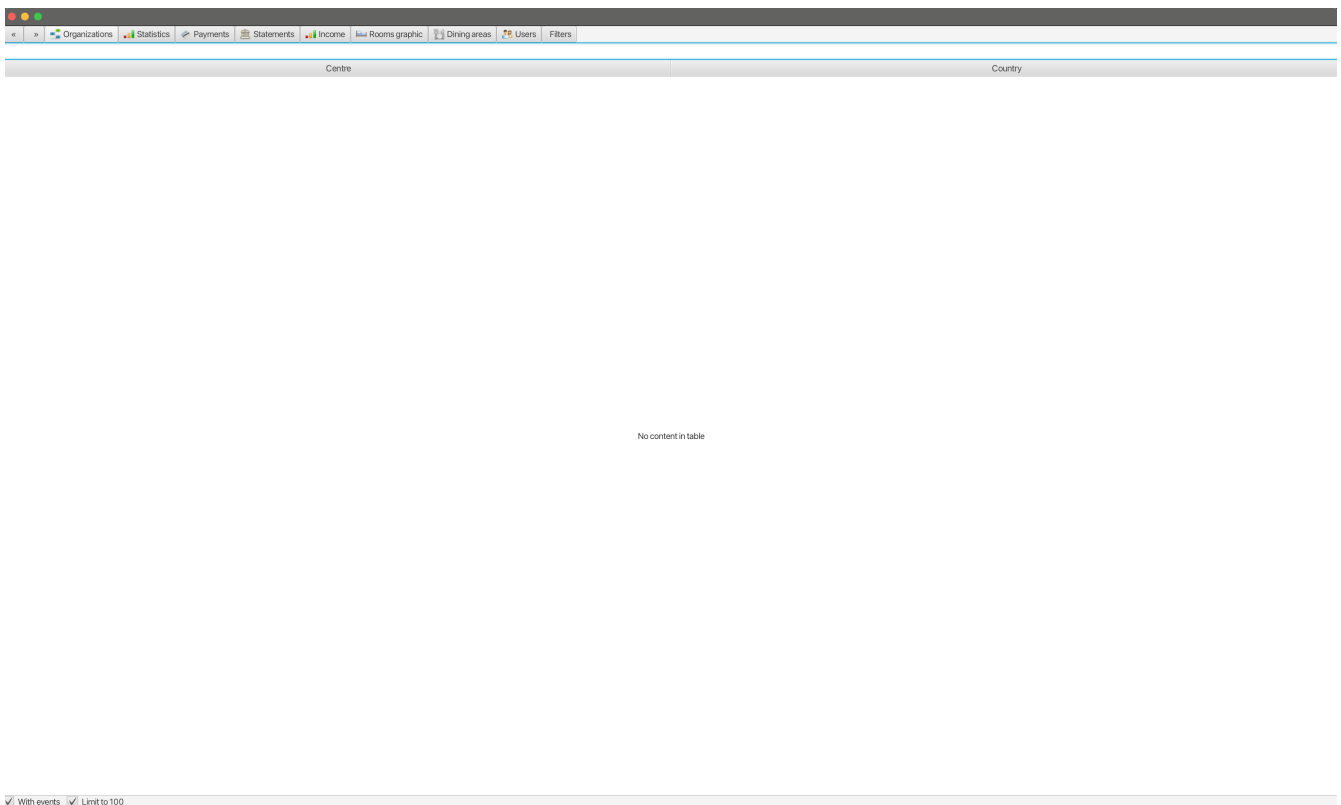

Build & open Back-Office Web client

First **build** the index.html file:

```
cd $MODALITY_ROOT
webfx build --gwt
```

Then either **locate** the resultant index.html file and open in a browser:

```
webfx build --gwt --locate  
<open file in browser>
```

Or **reveal** the resultant index.html file in file explorer, and double-click to open in a browser:

```
webfx build --gwt --reveal  
<open file in browser>
```

Or **run** the resultant index.html file directly, without worrying about its location:

```
webfx run --gwt
```

Build & run Front-Office Mobile client



The Front-Office Mobile client is not yet implemented.

Build & open Front-Office Web client



The Front-Office Web client is not yet implemented.

Modality Database

All database setup scripts are stored in the `modality-base/modality-base-server-datasource/src/main/resources/db/` folder, and are numbered in order of execution. Execution of the database scripts is performed automatically by the Flyway container, which runs on Docker startup. All the data is stored on the host, in directory:

```
$MODALITY_ROOT/docker/data/postgres/*
```

This provides persistence, and the container can be safely shut down and restarted without losing data.

Any new database scripts must be:

- ① added to the same `modality-base/modality-base-server-datasource/src/main/resources/db/` folder
- ② named according to the convention used in the folder: `V{number}__{desc}.sql`

Once a new script has been added to the folder, the Flyway container should be restarted, in order to apply the change. The easiest way to do this is to simply restart docker-compose:

```
cd $MODALITY_ROOT/docker
docker-compose down
docker-compose up
```

Modality Development Database

The Modality project additionally provides a development database that is pre-populated with test data, available from the [modality-dev-db](#) repository.

If you wish to import this database, you will need to:

- ① shut down the Modality server
- ② shut down the docker containers
- ③ delete the `docker/data/` folder
- ④ download the [modality-dev-db](#) repository
- ⑤ decompress the `V0001__modality_dev_db.sql.zip` file in the `modality-dev-db` repository
- ⑥ move the unzipped `V0001__modality_dev_db.sql` to the `modality-base/modality-base-server-datasource/src/main/resources/db/` folder
- ⑦ move all the other scripts temporarily out of the folder
- ⑧ restart the docker containers - this will auto-import the development database
- ⑨ wait until the import is complete. Due to the size of the development database, it can take 20+ minutes to import. Modality will not be usable during this time.

Modality Session

The session data is controlled by the docker-based Redis container and is not persisted locally. The data persists only as long as the container is running.

Using Docker

Connect to the Docker database container

Connection is easily made via any Postgres client (e.g. DBeaver). Use the following credentials (contained within the `docker/.env-template` file):

- Server: 127.0.0.1
- Port: 5432
- Database: modality
- User: modality
- Password: modality

Connect to the Docker session container

Connection can be made through the Docker terminal:

```
cd $MODALITY_ROOT/docker
docker exec -ti session /bin/sh
redis-cli
keys *
```

Shut down Docker

```
cd $MODALITY_ROOT/docker
docker-compose down
```

Destroy & rebuild the Docker containers

Sometimes you will want a fresh set of containers. The simplest way to do this is:

```
cd $MODALITY_ROOT/docker
docker-compose down
docker ps -a # Lists all Docker containers
docker rm <container-id> # Remove any docker containers listed
docker images # Lists all Docker images
docker image rm <image-id> # Remove any docker images listed
docker volume ls # Lists all Docker volumes
docker volume rm <volume-id> # Remove all docker volumes listed
docker system prune # Removes build cache, networks and dangling images
rm -rf data # Removes locally stored database tables
```

You can now rebuild the Docker containers:

```
docker-compose build --no-cache
docker-compose up
```

Deploy Modality to Heroku



Procedures for this coming soon!