

## Median Finding Algorithms

There are a few approaches to finding the median of a list. One approach is to sort the elements of the list and then compute the position of the median. That approach takes  $\Theta(n \log n)$  time.


Another approach inspired by quicksort is to find a pivot, and recurse on a subarray based on the rank of the pivot. The corresponding pseudocode is presented below.

```

1  SELECT(S, i):
2    Pick x in S cleverly
3    Compute k = rank(x)
4    B = Set of elements in S, such that elements < x
5    C = Set of elements in S, such that elements > x
6    if k == i:
7      return x
8    else if k > i:
9      return SELECT(B, i)
10   else if k < i:
11     return SELECT(C, i - k)

```

The intuition here is if we can eliminate either B or C cleverly, and prove that the subarray we recurse on is always a fraction of the previous array, the algorithm will run in  $\Theta(n)$  time.

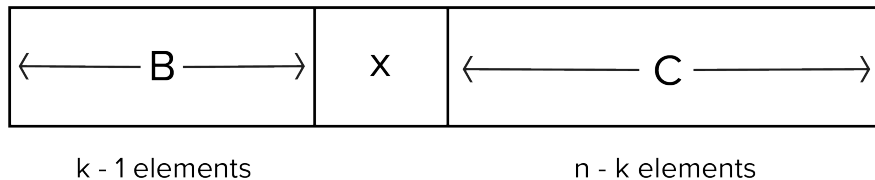

Without a clever strategy, if we're selecting the  $n - 1$  element and  $k = 1$  every time, then we're eliminating only one element on every iteration. There would be  $n$  iterations, each taking  $\Theta(n)$  time to partition the subarray. Therefore, the algorithm would run in  $\Theta(n^2)$ .

### Clever Partitioning

1. Arrange  $S$  into columns of size 5 ( $\lceil n/5 \rceil$  columns).
2. Sort each column in linear time (top down)
3. Find the medians of medians as  $x$ .

Half of the  $\lceil n/5 \rceil$  groups contribute at least 3 elements  $> x$  except for 1 trailing group which could contain fewer than 5 elements and 1 group containing  $x$ . Therefore, there are at least  $3(\lceil n/10 \rceil - 2)$  elements  $> x$  and at least  $3(\lceil n/10 \rceil - 2)$  elements  $< x$ .

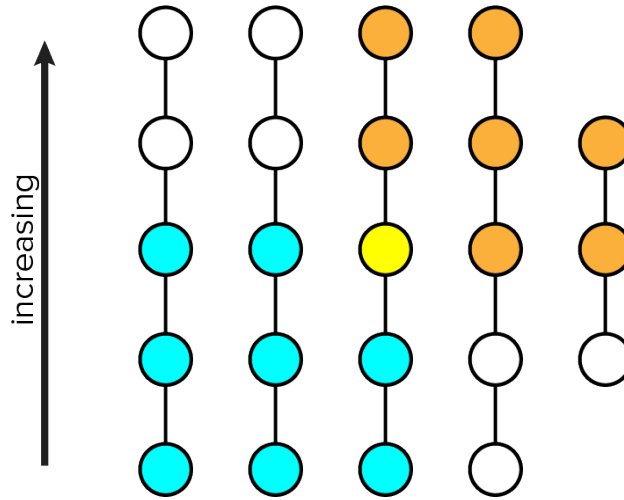


Figure 1: The cyan circles are the elements lower than  $x$  (denoted by the yellow circle) and the orange circles are the elements greater than  $x$

The recurrence can now be written as

$$f(n) = \begin{cases} \Theta(1), & \text{for } n \leq 140 \\ T(\lceil n/5 \rceil) + T(\frac{7n}{10} + 6) + \Theta(n), & \text{for } n > 140 \end{cases}$$

### Proof

Let's prove that  $T(n) < cn$  via induction. The base case is when  $n \leq 140$ , in which case,  $T(n) < cn$  for some arbitrarily large  $c$ .

Let's now consider the case when  $n > 140$ . First, we can substitute the base case into our equation. Then we can add an additional  $c$  term.

$$\begin{aligned} T(n) &\leq c\lceil n/5 \rceil + c\left(\frac{7n}{10} + 6\right) + an \\ &\leq \frac{cn}{5} + c + \frac{7nc}{10} + 6c + an \\ &= cn + \left(-\frac{cn}{10} + 7c + an\right) \end{aligned}$$

It's important to now check for when  $(-\frac{cn}{10} + 7c + an) = 0$ .

$$\begin{aligned} \left(-\frac{cn}{10} + 7c + an\right) &\leq 0 \\ \frac{cn}{10} &\geq 7c + an \\ c &\geq \frac{70c}{n} + 10a \end{aligned}$$

The expression is always true for  $n \geq 140$  and  $c \geq 20a$ .

## Code

```

1 import math
2 import random
3
4 const = 20
5 sub_size = 5
6 def SELECT(S, i):
7     if len(S) < const:
8         return sorted(S)[i] # assuming rank is zero indexed
9     num_medians = int(math.ceil(len(S) / sub_size))
10    medians = []
11    for curr_index in range(0, len(S), sub_size):
12        sub = S[curr_index : min(curr_index + sub_size, len(S))]
13        mid_index = int(math.floor(len(sub) / 2))
14        medians.append(sorted(sub)[mid_index])
15
16    median = SELECT(medians, int(math.floor(len(medians) / 2)))
17    B = []
18    C = []
19    for element in S:
20        if element < median:
21            B.append(element)
22        elif element > median:
23            C.append(element)
24    if len(B) == i:
25        return median
26    elif len(B) > i:
27        return SELECT(B, i)
28    else:
29        return SELECT(C, i - len(B) - 1)
30
31 arr = range(40)
32 random.shuffle(arr)

```

```
33 print(arr)
34 print(SELECT(arr, 15))
```