


## Classes

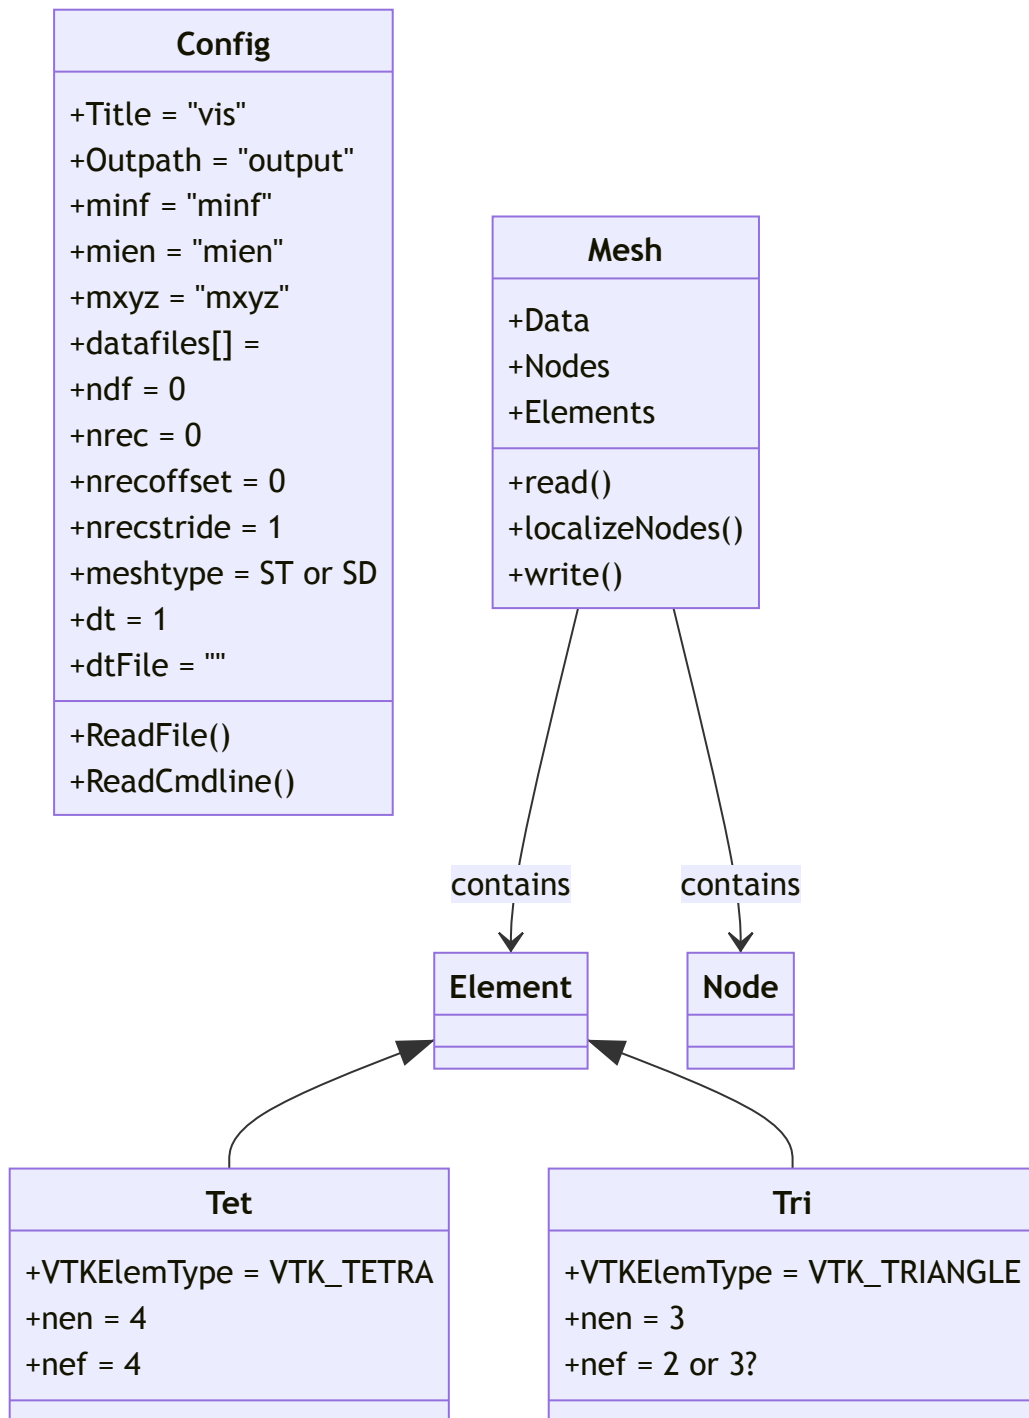

## New Arch

- Config constructor immediately reads file and commandline args
  - How does this work with MPI? before or after init?
- Config should create output directory
- Mesh.loadData and Mesh.write() should handle cases without data as well. Also timesteps