

# Chapter 2:

Java support two different kinds of data: **primitive** data and **objects**

**Primitive Types:** There are eight primitive data types in Java

- **boolean** (fundamental)
- **byte**
- **char** (fundamental)
- **double** (fundamental)
- **float**
- **int** (fundamental)
- **long**
- **short**

**Expression:** A simple value or a set of operations that produces a value

**Evaluation:** The process of obtaining the value of an expression

**Arithmetic operator:** + addition, – subtraction, \* multiplication, / division, % remainder

**Operands:** The values used in an expression

**Literals:** The simplest expressions

- **integer literal:** is a sequence of digits with or without a leading sign
- **floating-point literal:** includes a decimal point
- **character literal:** is one character enclosed in single quotation marks
- **boolean literal:** logic deals with just two possibilities: true and false

**mod operator (special cases and useful applications):**

- **Numerator smaller than denominator:** produces the numerator
- **Numerator of 0:** produces 0
- **Denominator of 0:** throw an ArithmeticException error
- **Number is even or odd:** number % 2 is 0 for evens, number % 2 is 1 for odds
- **Finding individual digits of a number:** number % 10 is the final digit
  - 12345 % 10 = 5
  - 12345 % 100 = 45
  - 12345 % 1000 = 345
  - 12345 % 10000 =2345
  - 12345 % 100000 =12345

**Precedence:** The binding power of an operator, which determines how to group parts of an expression.

Description	Operators
unary operators	++, —, +, –
multiplicative operators	*, /, %
additive operators	+, –
relational operators	<, >, <=, >=
equality operators	==, !=
assignment operators	=, +=, -=, *=, /=, %=

**casting** : You request a cast by putting the name of the type you want to cast to in parentheses in front of the value you want to cast.

- (int)2.89 = 2
- (double)2 = 2.0

**Variable:** A memory location with a name and a type that stores a value.

**Declaration:** A request to set aside a new variable with a given name and type.

**Assignment:** is the process of giving a value to a variable

**Here is an example of declaring multiple variables and assigning some of them values:**

- double height = 70, weight = 195, bmi;

**String Concatenation:** Combining several strings into a single string, or combining a string with other data into a new, longer string. (using the addition (+) operator)


**Useful Shorthand Operators:**

Long version	shorthand
x = x + 1;	x += 1;

<b>x = x - 1;</b>	<b>x -= 1;</b>
<b>x = x * 1;</b>	<b>x *= 1;</b>
<b>x = x / 1;</b>	<b>x /= 1;</b>
<b>x = x % 1;</b>	<b>x %= 1;</b>

**++/-- pre and post:** The pre- and post- variations both have the same overall effect. When you increment or decrement, there are really two values involved: the original value that the variable had before the increment or decrement operation, and the final value that the variable has after the increment or decrement operation. The post- versions evaluate to the original (older) value and the pre- versions evaluate to the final (later) value.

**Flow of for loop:**

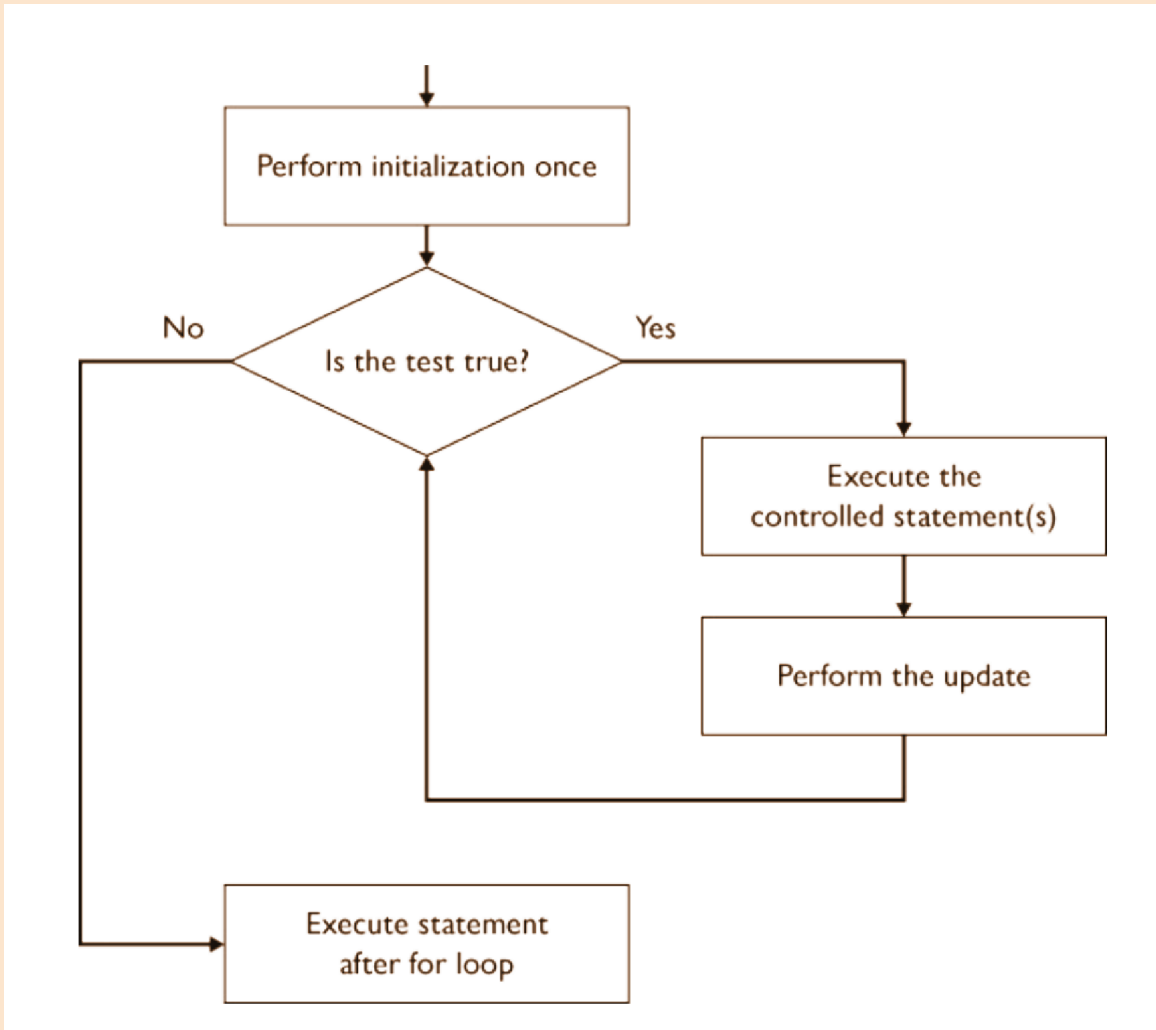

**Control Structure:** A syntactic structure that controls other statements

**Iteration:** Each execution of the controlled statement of a loop

**Scope:** The part of a program in which a particular declaration is valid

- The simple rule is that the scope of a variable declaration extends from the point where it is declared to the right curly brace that encloses it.

**Local Variable:** A variable declared inside a method that is accessible only in that method

**Localizing Variables:** Declaring variables in the innermost (most local) scope possible.

- In general, you will want to declare variables in the most local scope possible for security purposes.
- Localizing variables leads to some duplication (and possibly confusion) but provides more security.

**Class Constant:** A named value that cannot be changed. A class constant can be accessed anywhere in the class

- Constants are declared with the keyword final, which indicates the fact that their values cannot be changed once assigned
- public static final <type> <name> = <expression>;