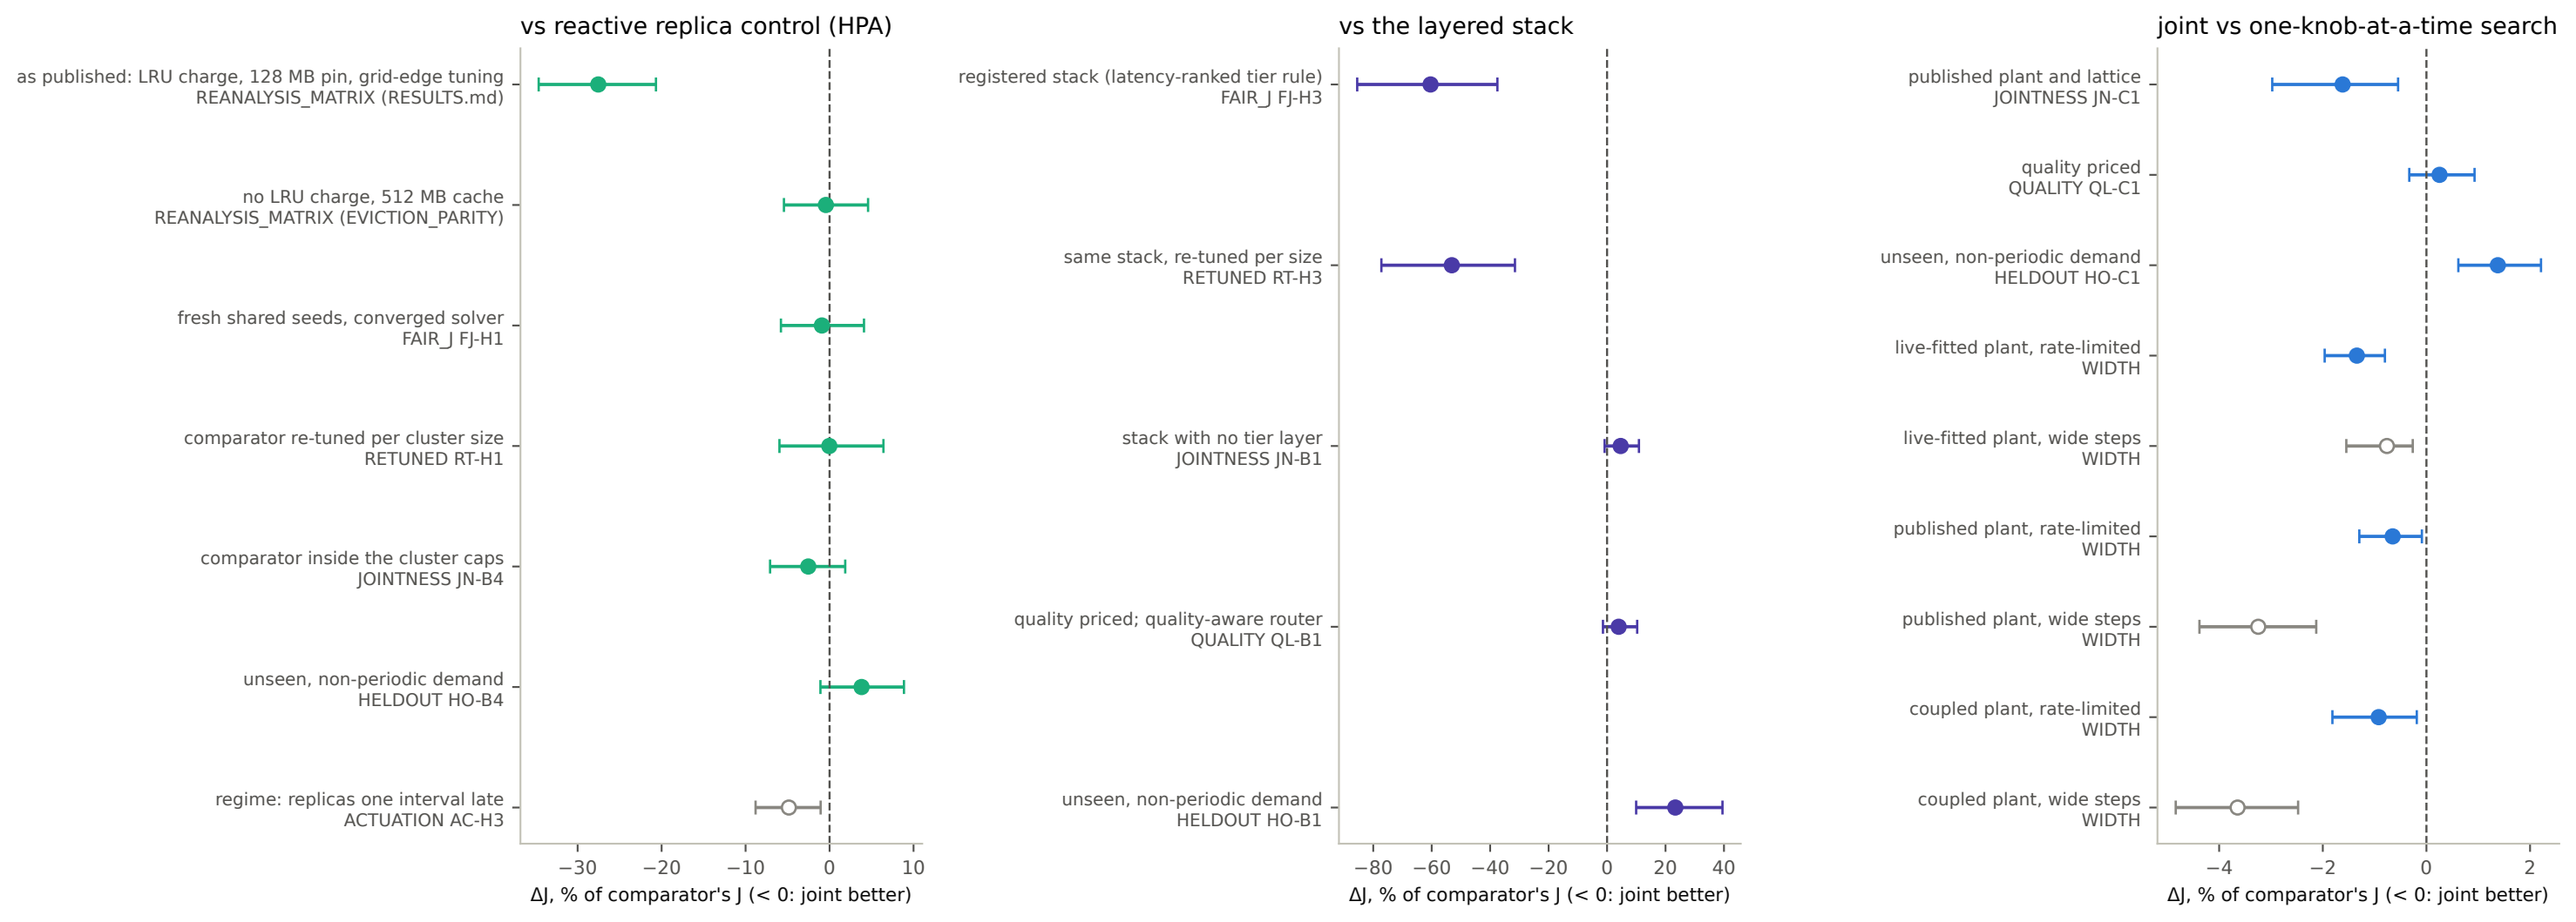
vs reactive replica control (HPA)
as published: LRU charge, 128 MB pin, grid-edge tuning
REANALYSIS_MATRIX (RESULTS.md)
no LRU charge, 512 MB cache
REANALYSIS_MATRIX (EVICTION_PARITY)
fresh shared seeds, converged solver
FAIR_J FJ-H1
comparator re-tuned per cluster size
RETUNED RT-H1
comparator inside the cluster caps
JOINTNESS JN-B4
unseen, non-periodic demand
HELDOUT HO-B4
regime: replicas one interval late
ACTUATION AC-H3
−30
−20
−10
0
10
ΔJ, % of comparator's J (< 0: joint better)
vs the layered stack
registered stack (latency-ranked tier rule)
FAIR_J FJ-H3
same stack, re-tuned per size
RETUNED RT-H3
stack with no tier layer
JOINTNESS JN-B1
quality priced; quality-aware router
QUALITY QL-B1
unseen, non-periodic demand
HELDOUT HO-B1
−80
−60
−40
−20
0
20
40
ΔJ, % of comparator's J (< 0: joint better)
joint vs one-knob-at-a-time search
published plant and lattice
JOINTNESS JN-C1
quality priced
QUALITY QL-C1
unseen, non-periodic demand
HELDOUT HO-C1
live-fitted plant, rate-limited
WIDTH
live-fitted plant, wide steps
WIDTH
published plant, rate-limited
WIDTH
published plant, wide steps
WIDTH
coupled plant, rate-limited
WIDTH
coupled plant, wide steps
WIDTH
−4
−2
0
2
ΔJ, % of comparator's J (< 0: joint better)