


# Socket Programming

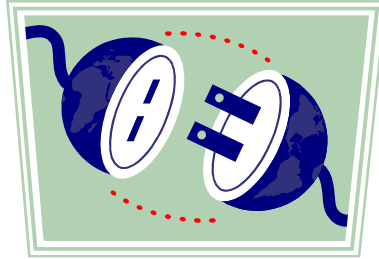

Rohan Murty

Hitesh Ballani

Last Modified:

2/8/2004 8:31:51 AM

# Socket programming

Goal: learn how to build client/server application that communicate using sockets

## Socket API


- introduced in BSD4.1 UNIX, 1981
- Sockets are explicitly created, used, released by applications
- client/server paradigm
- two types of transport service via socket API:
  - unreliable datagram
  - reliable, byte stream-oriented

### socket

a *host-local, application-created/owned, OS-controlled* interface (a “door”) into which application process can **both send and receive** messages to/from another (remote or local) application process

# Sockets

Socket: a door between application process and end-end-transport protocol (UCP or TCP)

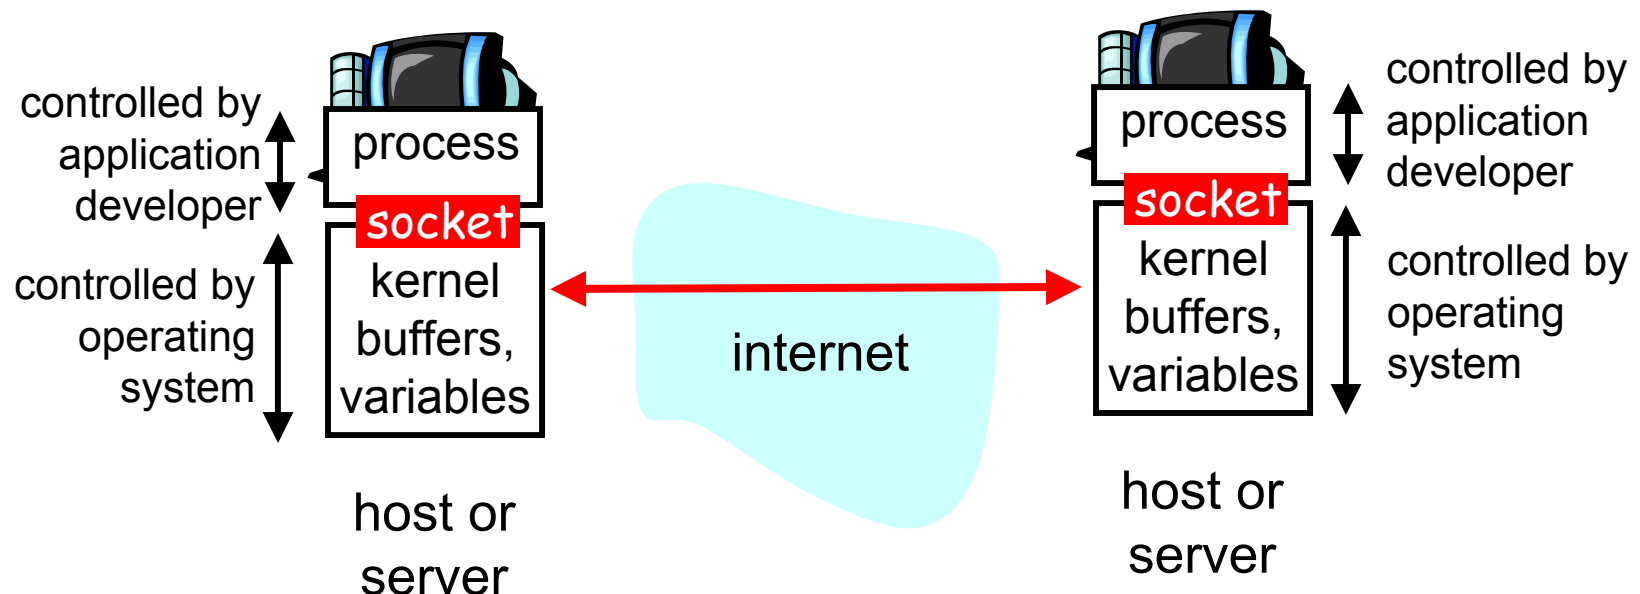

# Languages and Platforms

Socket API is available for many languages on many platforms:

- C, Java, Perl, Python,...
- \*nix, Windows,...

Socket Programs written in any language and running on any platform can communicate with each other!

Writing communicating programs in different languages is a good exercise

# Decisions

- Before you go to write socket code, decide
  - Do you want a **TCP**-style reliable, full duplex, connection oriented channel? Or do you want a **UDP**-style, unreliable, message oriented channel?
  - Will the code you are writing be the **client** or the **server**?
    - Client: you assume that there is a process already running on another machines that you need to connect to.
    - Server: you will just start up and wait to be contacted

# Socket programming with TCP

## Client must contact server

- server process must first be running
- server must have created socket (door) that welcomes client's contact

## Client contacts server by:

- creating client-local TCP socket
- specifying IP address, port number of server process

- When **client creates socket**: client TCP establishes connection to server TCP
- When contacted by client, **server TCP creates new socket** for server process to communicate with client
  - Frees up incoming port
  - allows server to talk with multiple clients

## application viewpoint

*TCP provides reliable, in-order transfer of bytes ("pipe") between client and server*

# Pseudo code TCP client

- Create socket, connectSocket
- Do an active connect specifying the IP address and port number of server
- Read and Write Data Into  
connectSocket to Communicate with  
server
- Close connectSocket

# Pseudo code TCP server

- Create socket (serverSocket)
- Bind socket to a specific port where clients can contact you
- Register with the kernel your willingness to listen that on socket for client to contact you
- Loop
  - Accept new connection (connectSocket)
  - Read and Write Data Into connectSocket to Communicate with client
  - Close connectSocket
  - End Loop
- Close serverSocket



# Example: Java client (TCP)

```
import java.io.*;
import java.net.*;
class TCPClient {
```

```
    public static void main(String argv[]) throws Exception
    {
```

```
        String sentence;
        String modifiedSentence;
```

Create  
input stream



```
        BufferedReader inFromUser =
            new BufferedReader(new InputStreamReader(System.in));
```

Create  
client socket,  
connect to server



```
        Socket clientSocket = new Socket("hostname", 6789);
```

Create  
output stream  
attached to socket



```
        DataOutputStream outToServer =
            new DataOutputStream(clientSocket.getOutputStream());
```

# Example: Java client (TCP), cont.

Create  
input stream  
attached to socket

Send line  
to server

Read line  
from server

```
BufferedReader inFromServer =  
    new BufferedReader(new  
        InputStreamReader(clientSocket.getInputStream()));  
  
sentence = inFromUser.readLine();  
  
outToServer.writeBytes(sentence + '\n');  
  
modifiedSentence = inFromServer.readLine();  
  
System.out.println("FROM SERVER: " + modifiedSentence);  
  
clientSocket.close();  
  
}  
}
```

# Example: Java server (TCP)

```
import java.io.*;  
import java.net.*;
```

```
class TCPServer {
```

```
    public static void main(String argv[]) throws Exception  
    {
```

```
        String clientSentence;  
        String capitalizedSentence;
```

Create  
welcoming socket  
at port 6789



```
        ServerSocket welcomeSocket = new ServerSocket(6789);
```

Wait, on welcoming  
socket for contact  
by client



```
        while(true) {
```


```
            Socket connectionSocket = welcomeSocket.accept();
```

Create input  
stream, attached  
to socket



```
            BufferedReader inFromClient =  
                new BufferedReader(new  
                    InputStreamReader(connectionSocket.getInputStream()));
```


# Example: Java server (TCP), cont

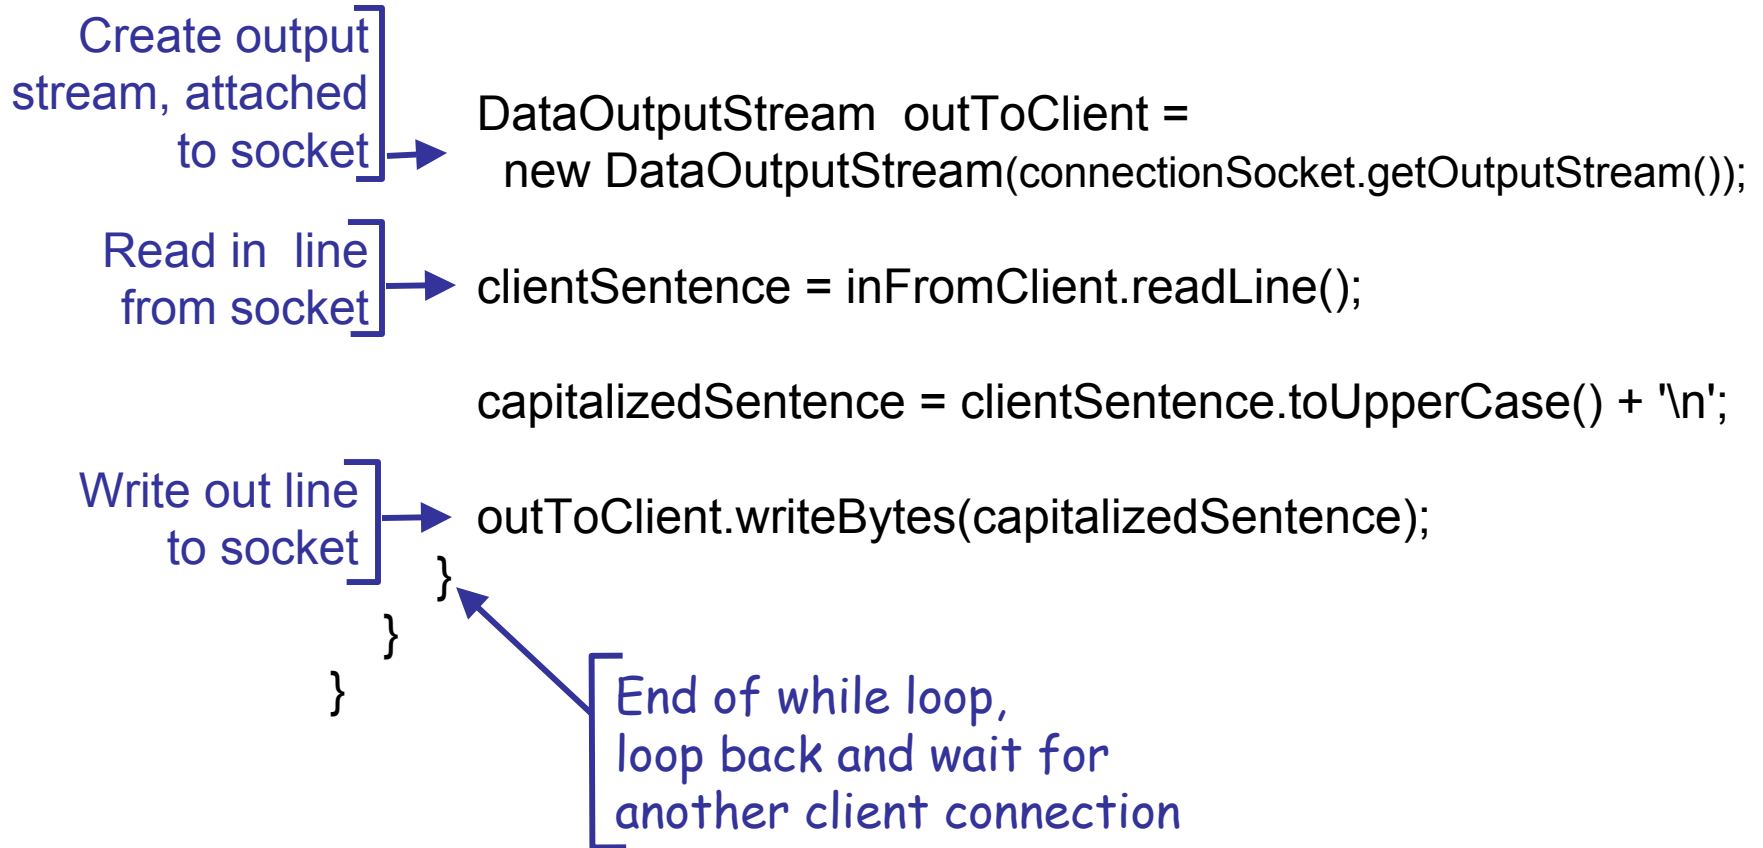

# Client/server socket interaction: TCP (Java)

Server (running on `hostid`)

Client

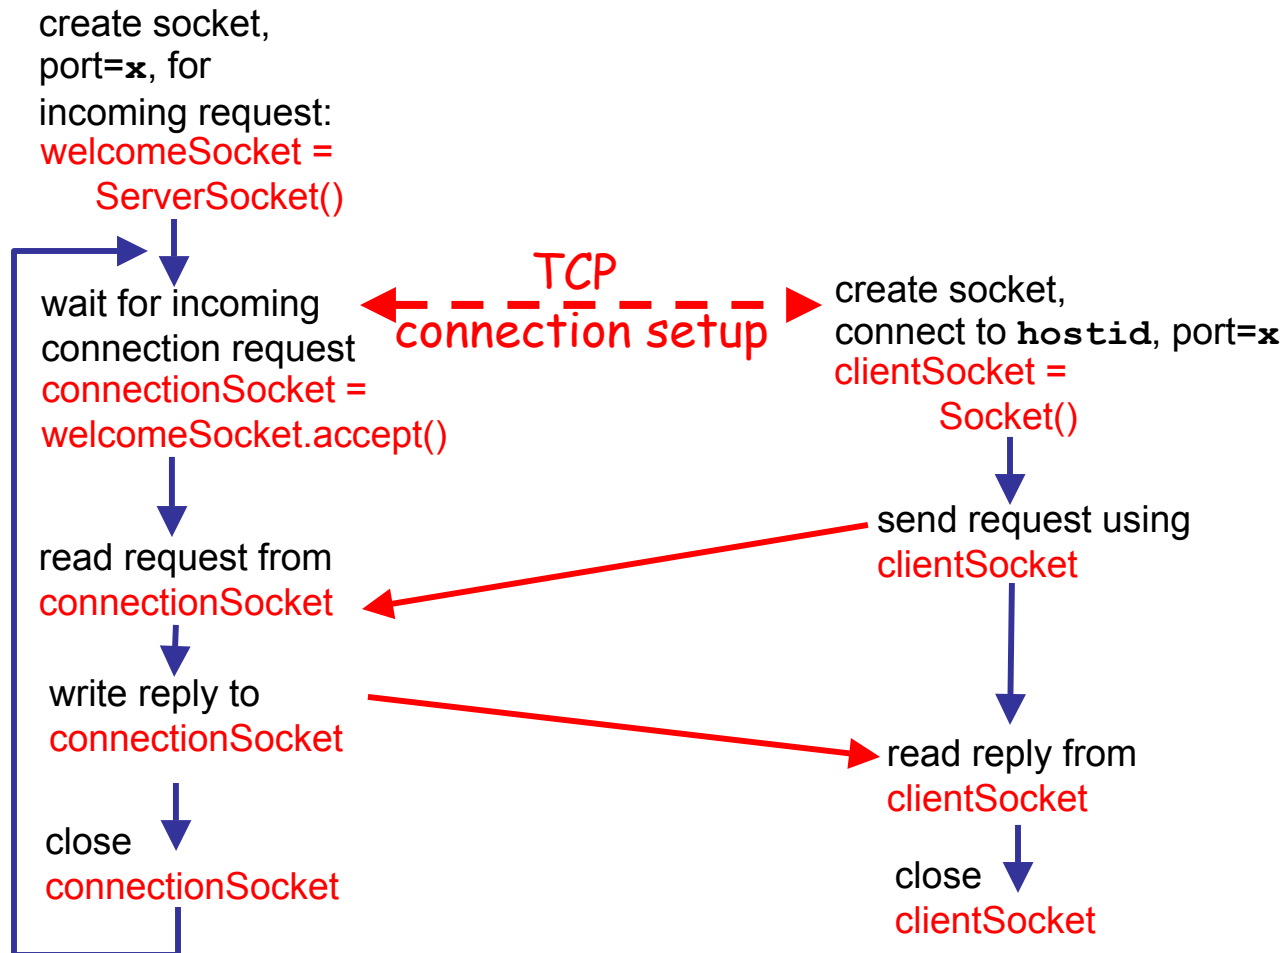


# Queues

- We just saw a simple example, with one socket on the server handling incoming connections
- While the server socket is busy, incoming connections are stored in a queue until it can accept them
- Most systems maintain a queue length between 5 and 50
- Once the queue fills up, further incoming connections are refused until space in the queue opens up
- This is a problem in a situation where our server has to handle many concurrent incoming connections.  
Example: HTTP servers
  - Solution? Use concurrency

# Concurrent TCP Servers

- Benefit comes in ability to hand off processing to another process
  - Parent process creates the “door bell” or “welcome” socket on well-known port and waits for clients to request connection
  - When a client does connect, fork off a child process to handle that connection so that parent process can return to waiting for connections as soon as possible
- Multithreaded server: same idea, just spawn off another thread rather than a full process
  - Threadpools?

# Threadpools

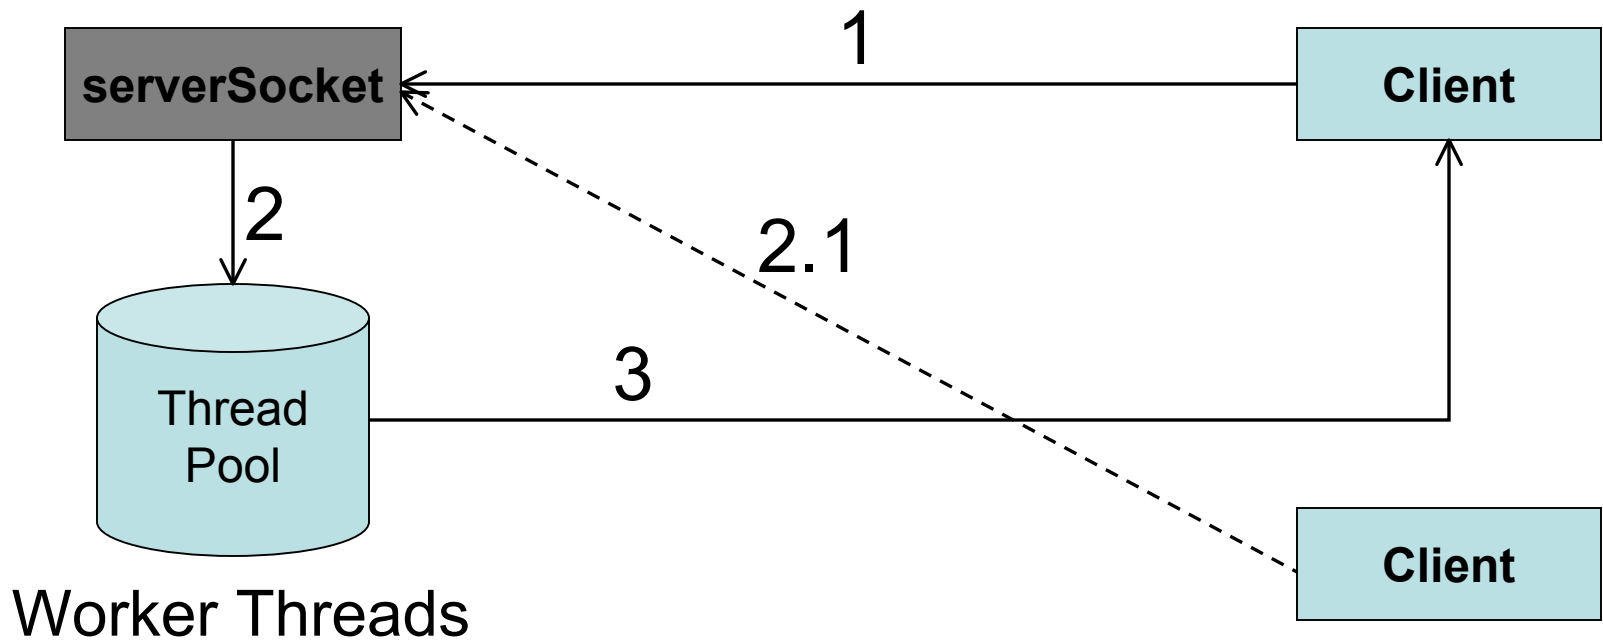



# Socket programming with UDP

UDP: very different mindset than TCP

- no connection just independent messages sent
- no handshaking
- sender explicitly attaches IP address and port of destination
- server must extract IP address, port of sender from received datagram to know who to respond to

UDP: transmitted data may be received out of order, or lost

application viewpoint

*UDP provides unreliable transfer of groups of bytes (“datagrams”) between client and server*

# Pseudo code UDP server

- Create socket
- Bind socket to a specific port where clients can contact you
- Loop
  - (Receive UDP Message from client x)+
  - (Send UDP Reply to client x)\*
- Close Socket

# Pseudo code UDP client

- Create socket
- Loop
  - (Send Message To Well-known port of server)+
  - (Receive Message From Server)
- Close Socket

# Example: Java client (UDP)

```
import java.io.*;  
import java.net.*;
```

```
class UDPClient {  
    public static void main(String args[]) throws Exception  
    {
```

Create  
input stream

```
        BufferedReader inFromUser =  
            new BufferedReader(new InputStreamReader(System.in));
```

Create  
client socket

```
        DatagramSocket clientSocket = new DatagramSocket();
```

Translate  
hostname to IP  
address using DNS

```
        InetAddress IPAddress = InetAddress.getByName("hostname");
```

```
        byte[] sendData = new byte[1024];  
        byte[] receiveData = new byte[1024];
```

```
        String sentence = inFromUser.readLine();  
        sendData = sentence.getBytes();
```

# Example: Java client (UDP), cont.

Create datagram with  
data-to-send,  
length, IP addr, port

Send datagram  
to server

Read datagram  
from server

```
DatagramPacket sendPacket =  
    new DatagramPacket(sendData, sendData.length, IPAddress, 9876);  
  
clientSocket.send(sendPacket);  
  
DatagramPacket receivePacket =  
    new DatagramPacket(receiveData, receiveData.length);  
  
clientSocket.receive(receivePacket);  
  
String modifiedSentence =  
    new String(receivePacket.getData());  
  
System.out.println("FROM SERVER:" + modifiedSentence);  
clientSocket.close();  
}  
}
```

# Example: Java server (UDP)

```
import java.io.*;  
import java.net.*;
```

```
class UDPServer {  
    public static void main(String args[]) throws Exception  
    {
```

Create  
datagram socket  
at port 9876



```
DatagramSocket serverSocket = new DatagramSocket(9876);
```

```
byte[] receiveData = new byte[1024];  
byte[] sendData = new byte[1024];
```

```
while(true)  
{
```

Create space for  
received datagram



```
DatagramPacket receivePacket =  
    new DatagramPacket(receiveData, receiveData.length);
```

Receive  
datagram



```
serverSocket.receive(receivePacket);
```

# Example: Java server (UDP), cont

```
String sentence = new String(receivePacket.getData());
```

Get IP addr  
port #, of  
sender

```
    InetAddress IPAddress = receivePacket.getAddress();  
    int port = receivePacket.getPort();
```

```
String capitalizedSentence = sentence.toUpperCase();
```

```
sendData = capitalizedSentence.getBytes();
```

Create datagram  
to send to client

```
    DatagramPacket sendPacket =  
        new DatagramPacket(sendData, sendData.length, IPAddress,  
                             port);
```

Write out  
datagram  
to socket


```
    serverSocket.send(sendPacket);  
}  
}
```

End of while loop,  
loop back and wait for  
another datagram

# Client/server socket interaction: UDP

Server (running on `hostid`)

Client

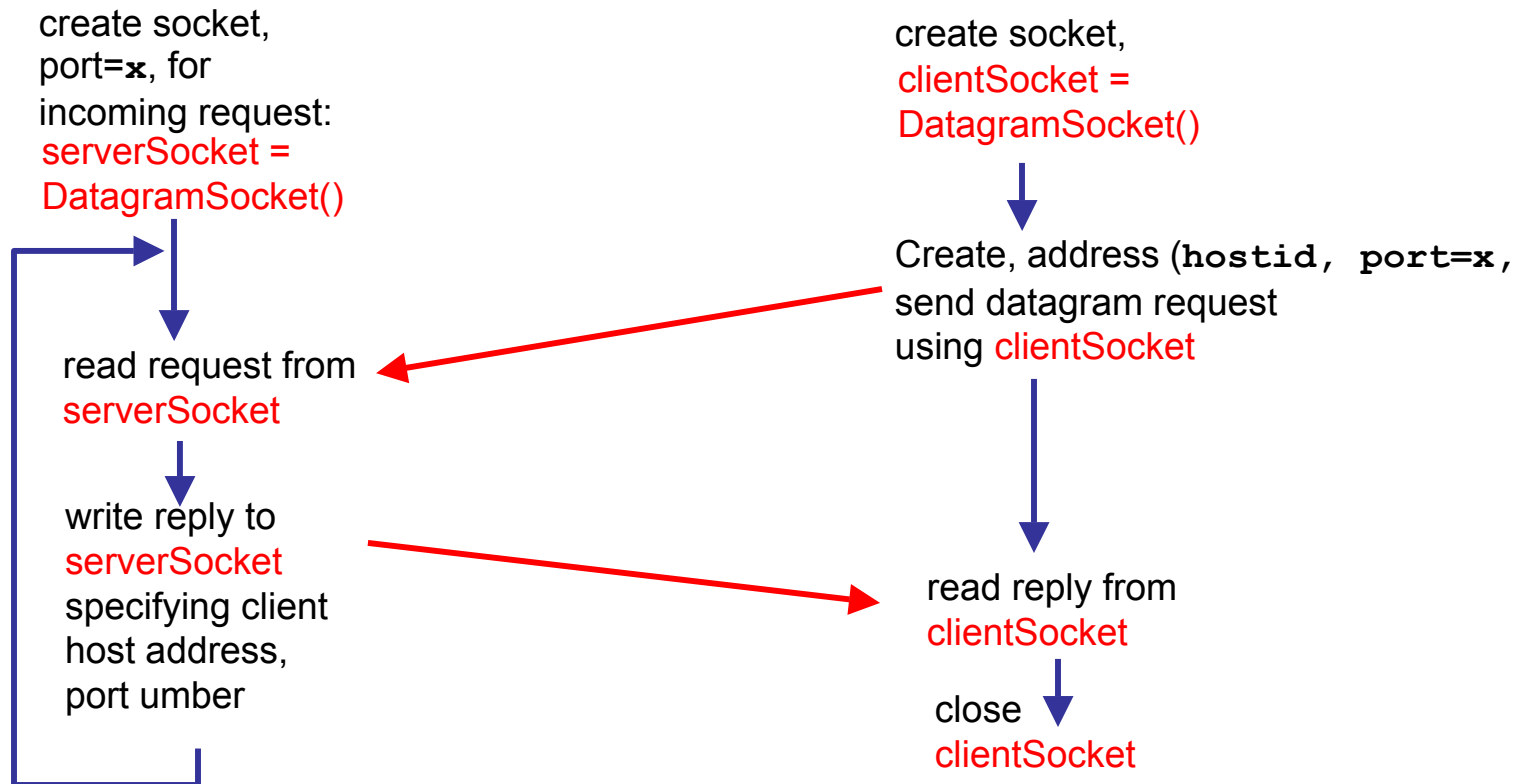




# UDP Server vs Client

- Server has a well-known port number
- Client initiates contact with the server
- Less difference between server and client code than in TCP
  - Both client and server bind to a UDP socket
  - Not accept for server and connect for client
- Client send to the well-known server port; server extracts the client's address from the datagram it receives

# TCP vs UDP

- TCP can use read/write (or recv/send) and source and destination are implied by the connection; UDP must specify destination for each datagram
  - Sendto, recvfrom include address of other party
- TCP server and client code look quite different; UDP server and client code vary mostly in who sends first

# Socket Types

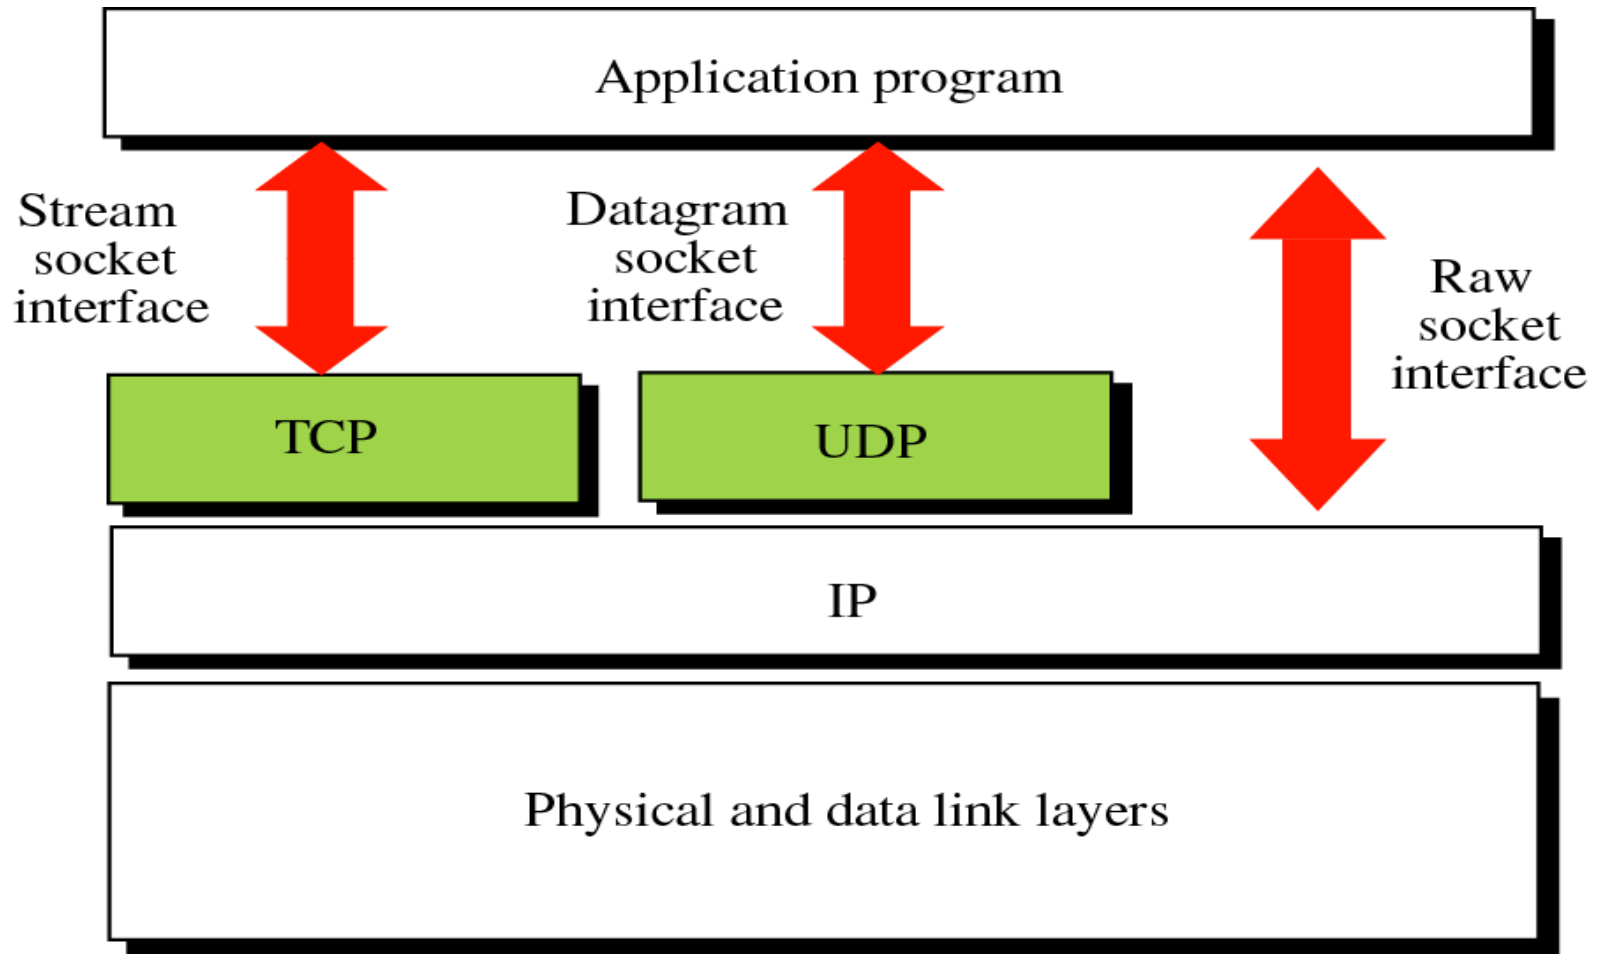

# CONNECTION-ORIENTED SERVICE

**Client**

1. Create transport endpoint: **socket( )**

2. Assign transport endpoint an address (optional): **bind( )**

3. Determine address of server

4. Connect to server: **connect( )**

4. Formulate message and send: **write ( )**

5. Wait for packet to arrive: **read( )**

6. Release transport endpoint: **close( )**

**Server**

1. Create transport endpoint for incoming connection request: **socket()**

2. Assign transport endpoint an address: **bind( )**

3. Announce willing to accept connections: **listen( )**

4. Block and Wait for incoming request: **accept( )**

5. Wait for a packet to arrive: **read ( )**

6. Formulate reply (if any) and send: **write( )**

7. Release transport endpoint: **close( )**



# Connectionless Service (UDP)

## Server

1. Create transport endpoint: **socket()**

2. Assign transport endpoint an address: **bind()**

3. Wait for a packet to arrive: **recvfrom()**

4. Formulate reply (if any) and send: **sendto()**

5. Release transport endpoint: **close()**

## Client

1. Create transport endpoint: **socket()**

2. Assign transport endpoint an address (optional): **bind()**

3. Determine address of server

4. Formulate message and send: **sendto()**

5. Wait for packet to arrive: **recvfrom()**

6. Release transport endpoint: **close()**



# Non-blocking I/O

- By default, `accept()`, `recv()`, etc block until there's input
- What if you want to do something else while you're waiting?
- We can set a socket to not block (i.e. if there's no input an error will be returned)
- ... or, we can tell the kernel to let us know when a socket is ready, and deal with it only then

# PROJECT 1 : BASIC SOCKETS

AIM: Write a program (referred to as the **IP box**) that opens three sockets, two TCP and one UDP

## 2 TCP SOCKETS :

1. A **receive-config** socket : IP BOX acts as a Server (must be bound to a port you have to find, and the interface IP address)
2. A **send-config** socket : IP BOX acts as client.

(CONT ...)

- 1 UDP SOCKETS

- App -- acts as the interface between the IP layer and the application
- It must be bound to an used port and the interface address



# IP BOX OPERATION

- Send-config sockets connects to the Test Box and sends a “ready-to-test” command
- The Test Box then connects to recv-config socket and send a ‘\n’ terminated command which must be echoed
- The Test Box then sends UDP packets to app socket which must be echoed (Note : If the Test Box does not receive your echo, it retransmits the packet)

(cont ...)

- On receiving both the echoes, the Test Box sends a “send-stat” command to the send-config socket
- The IP box sends a “list-of-stats”
- The Test Box then sends an exit message.