


Wasla (wasls) — database overview: 61 tables

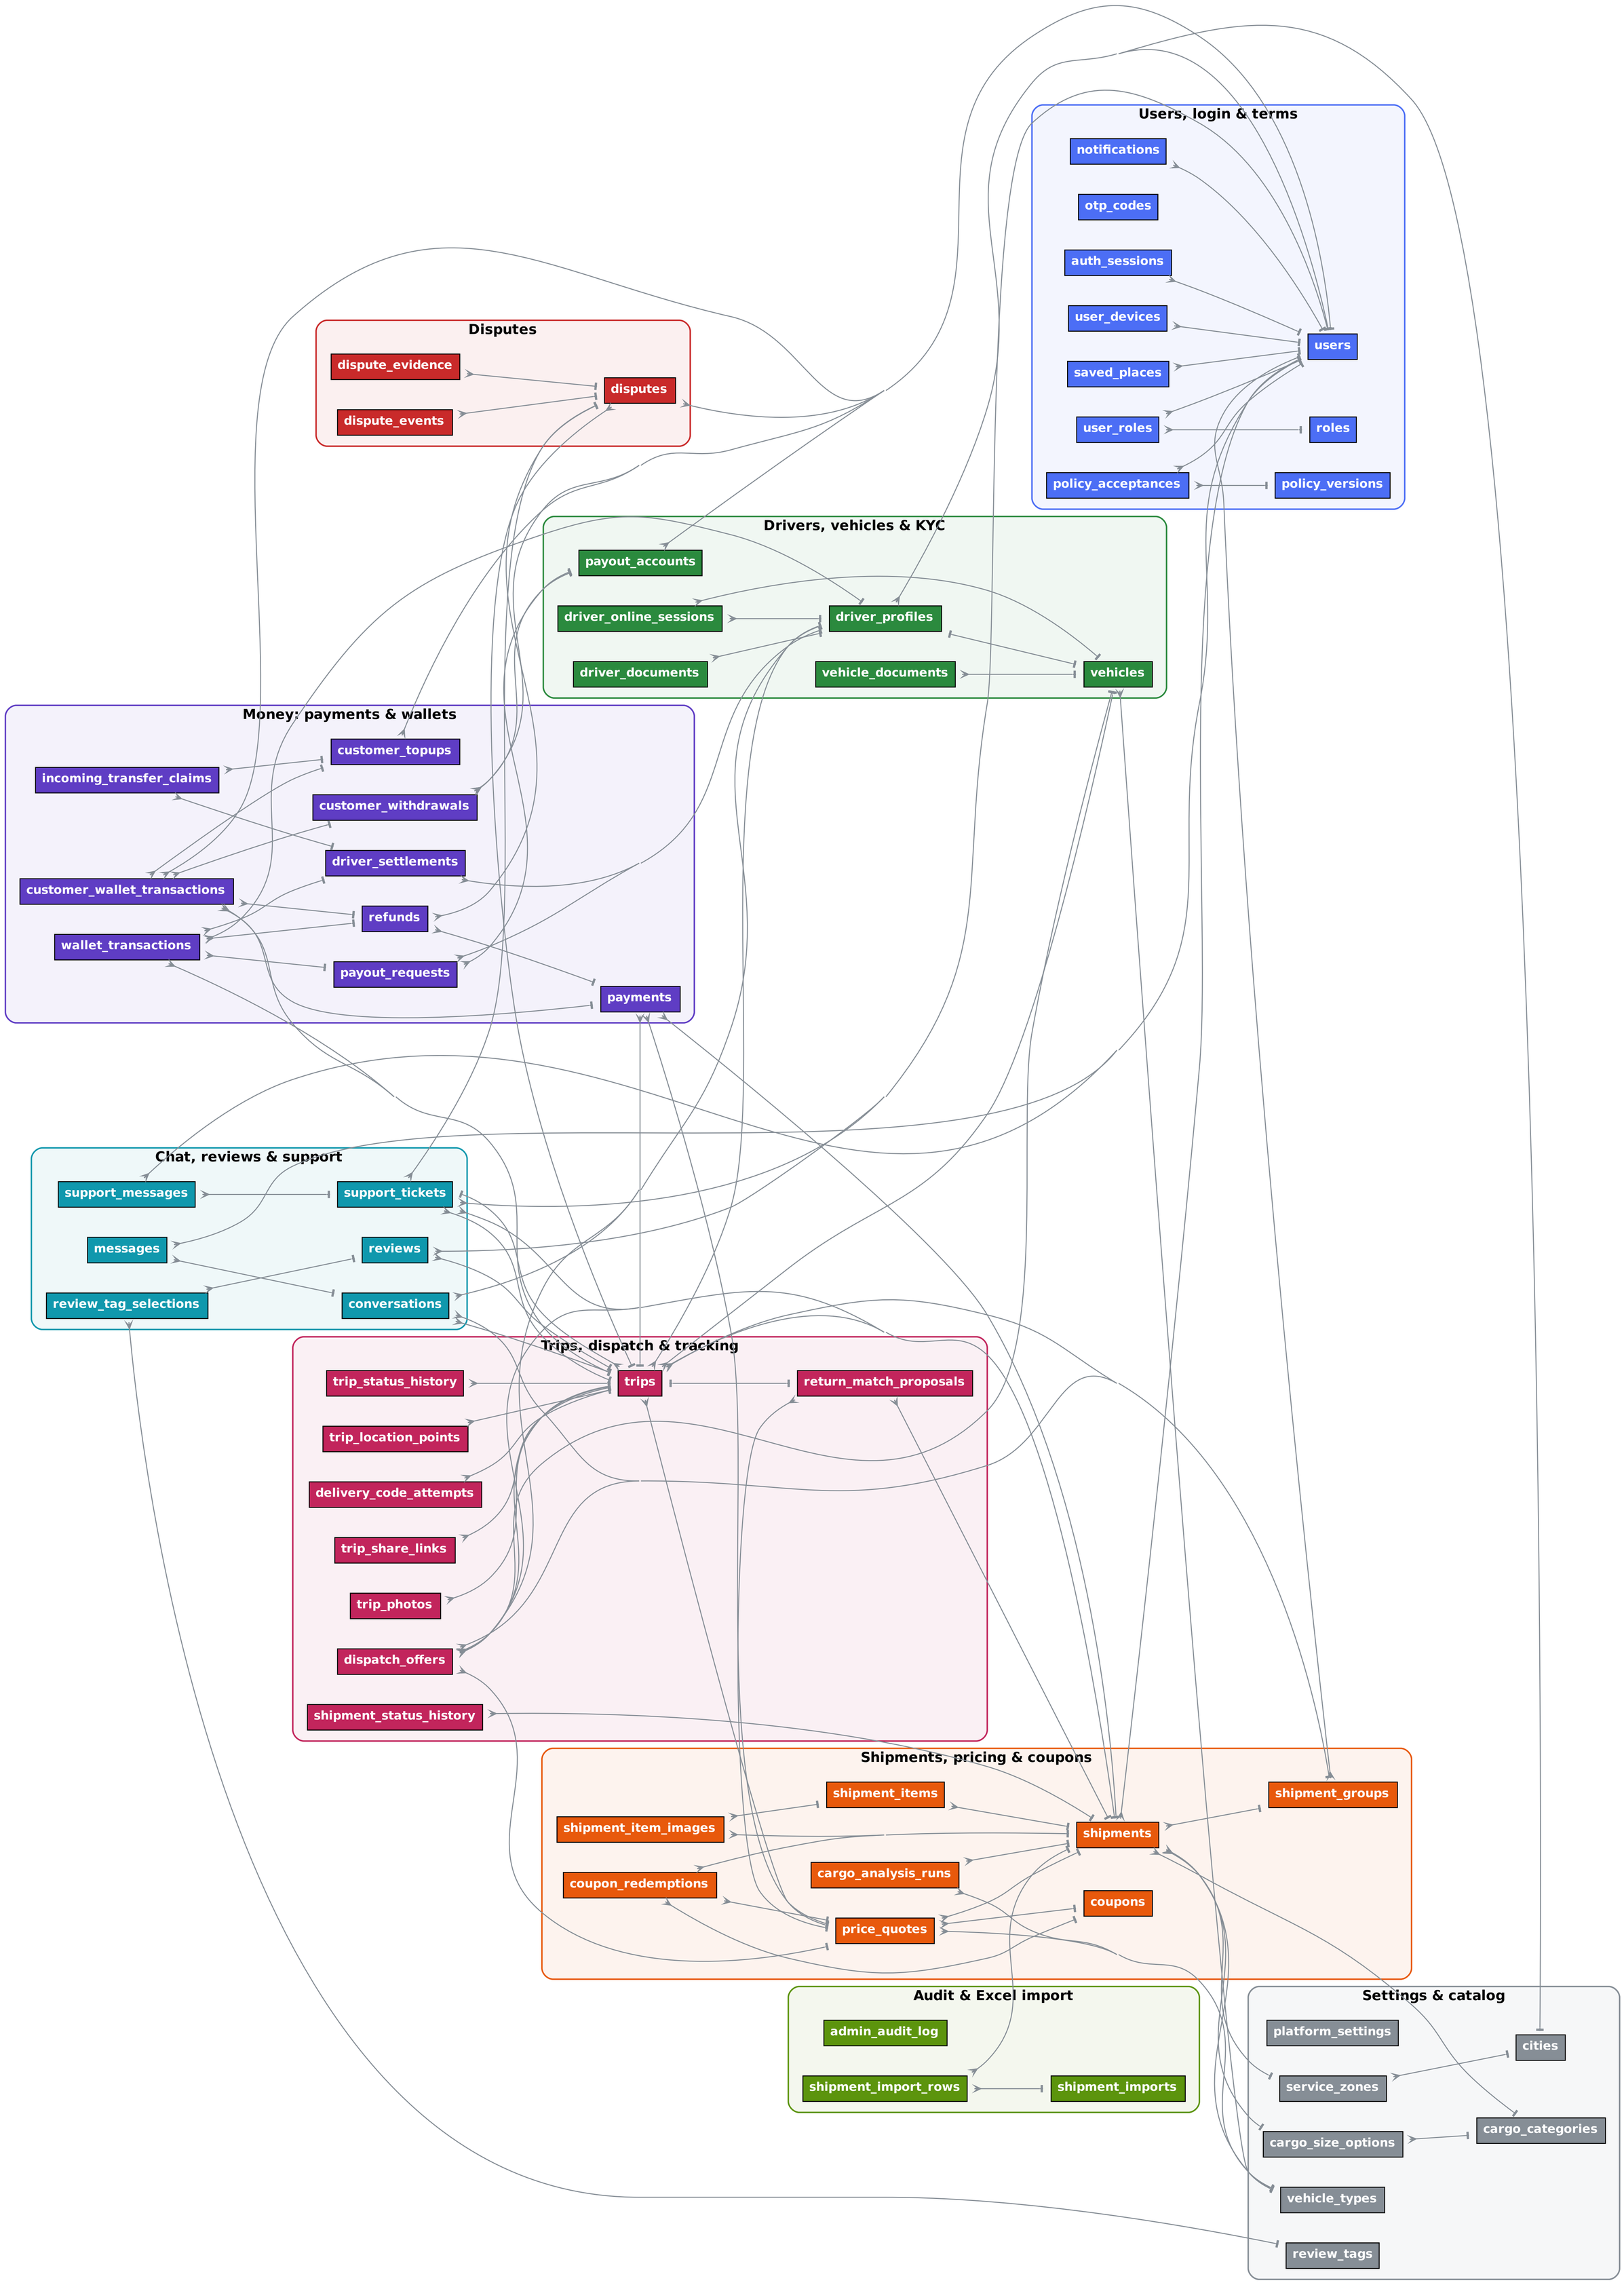


1. Users, login & terms (columns: PK primary key, FK foreign key, UQ unique, ? = nullable)

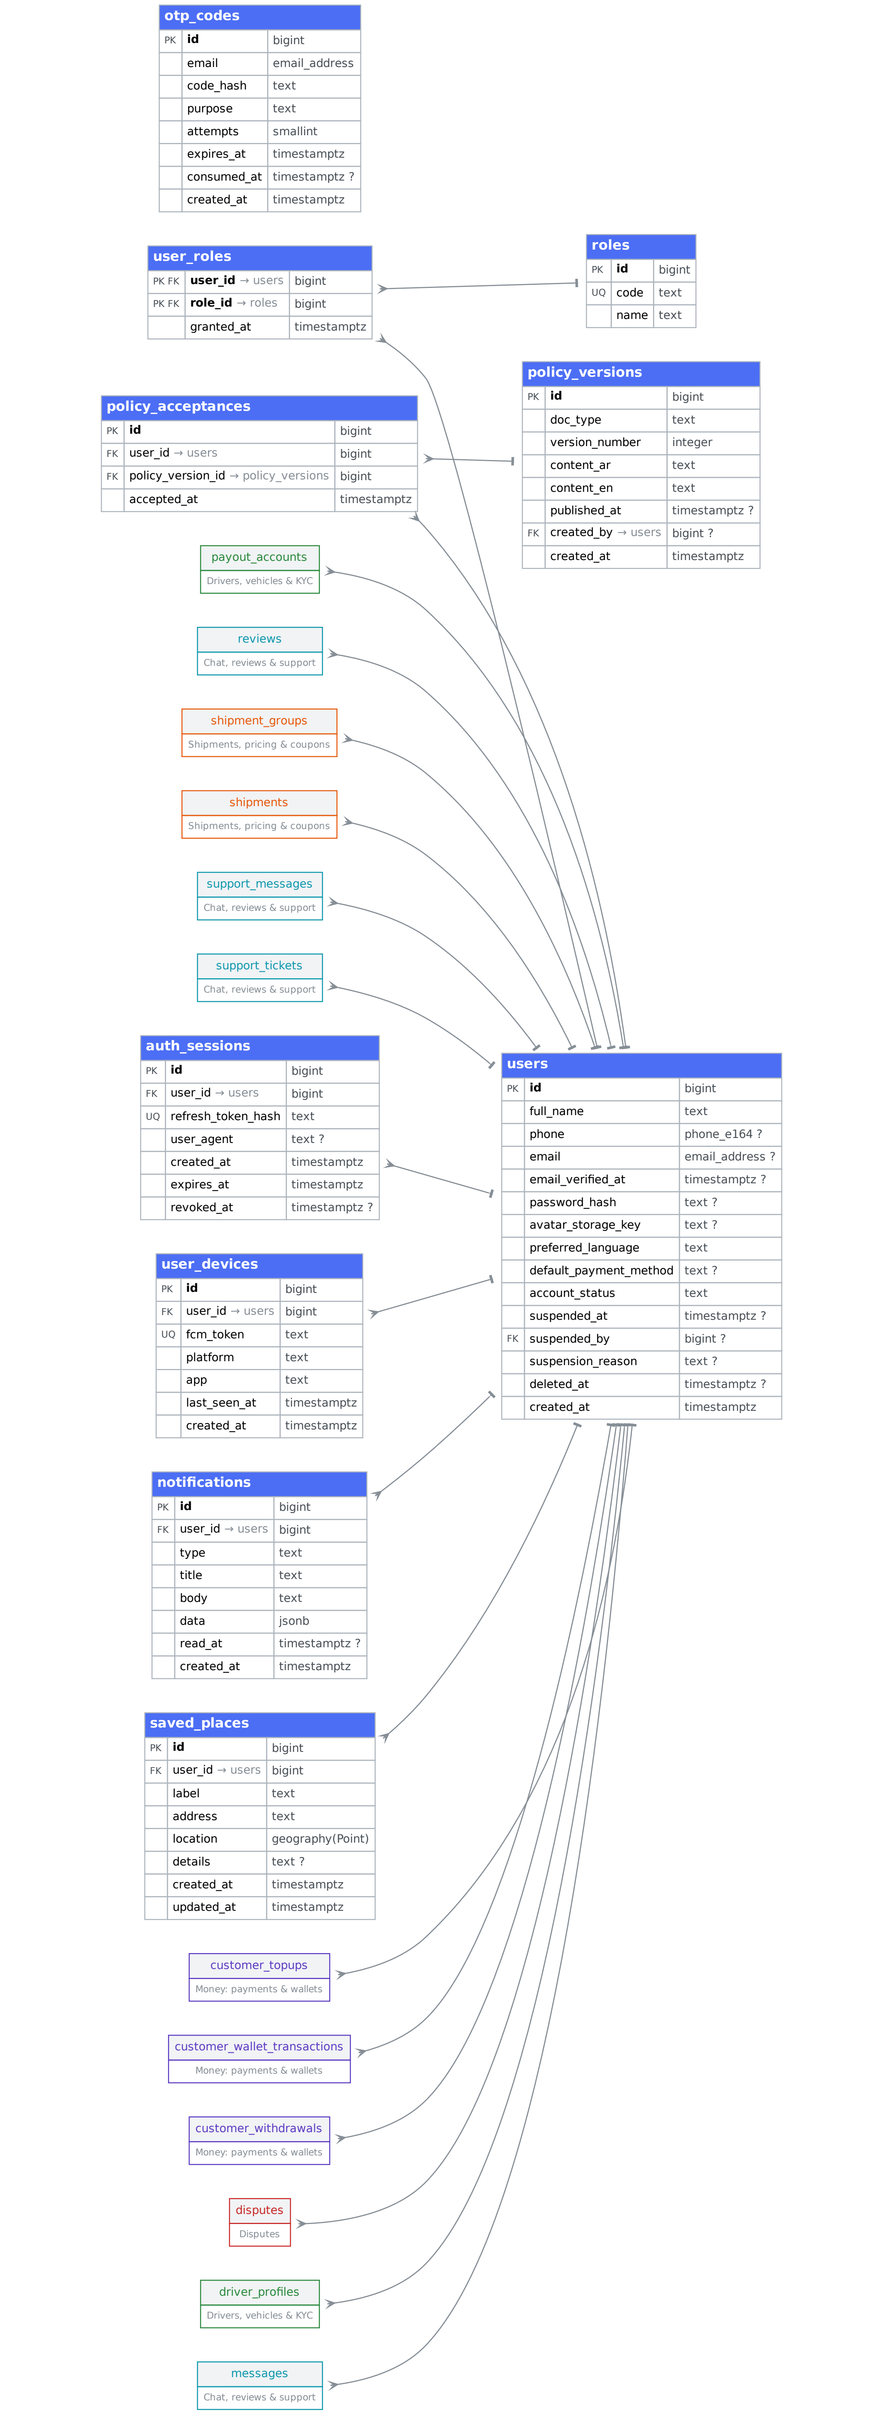


2. Settings & catalog (columns: PK primary key, FK foreign key, UQ unique, ? = nullable)

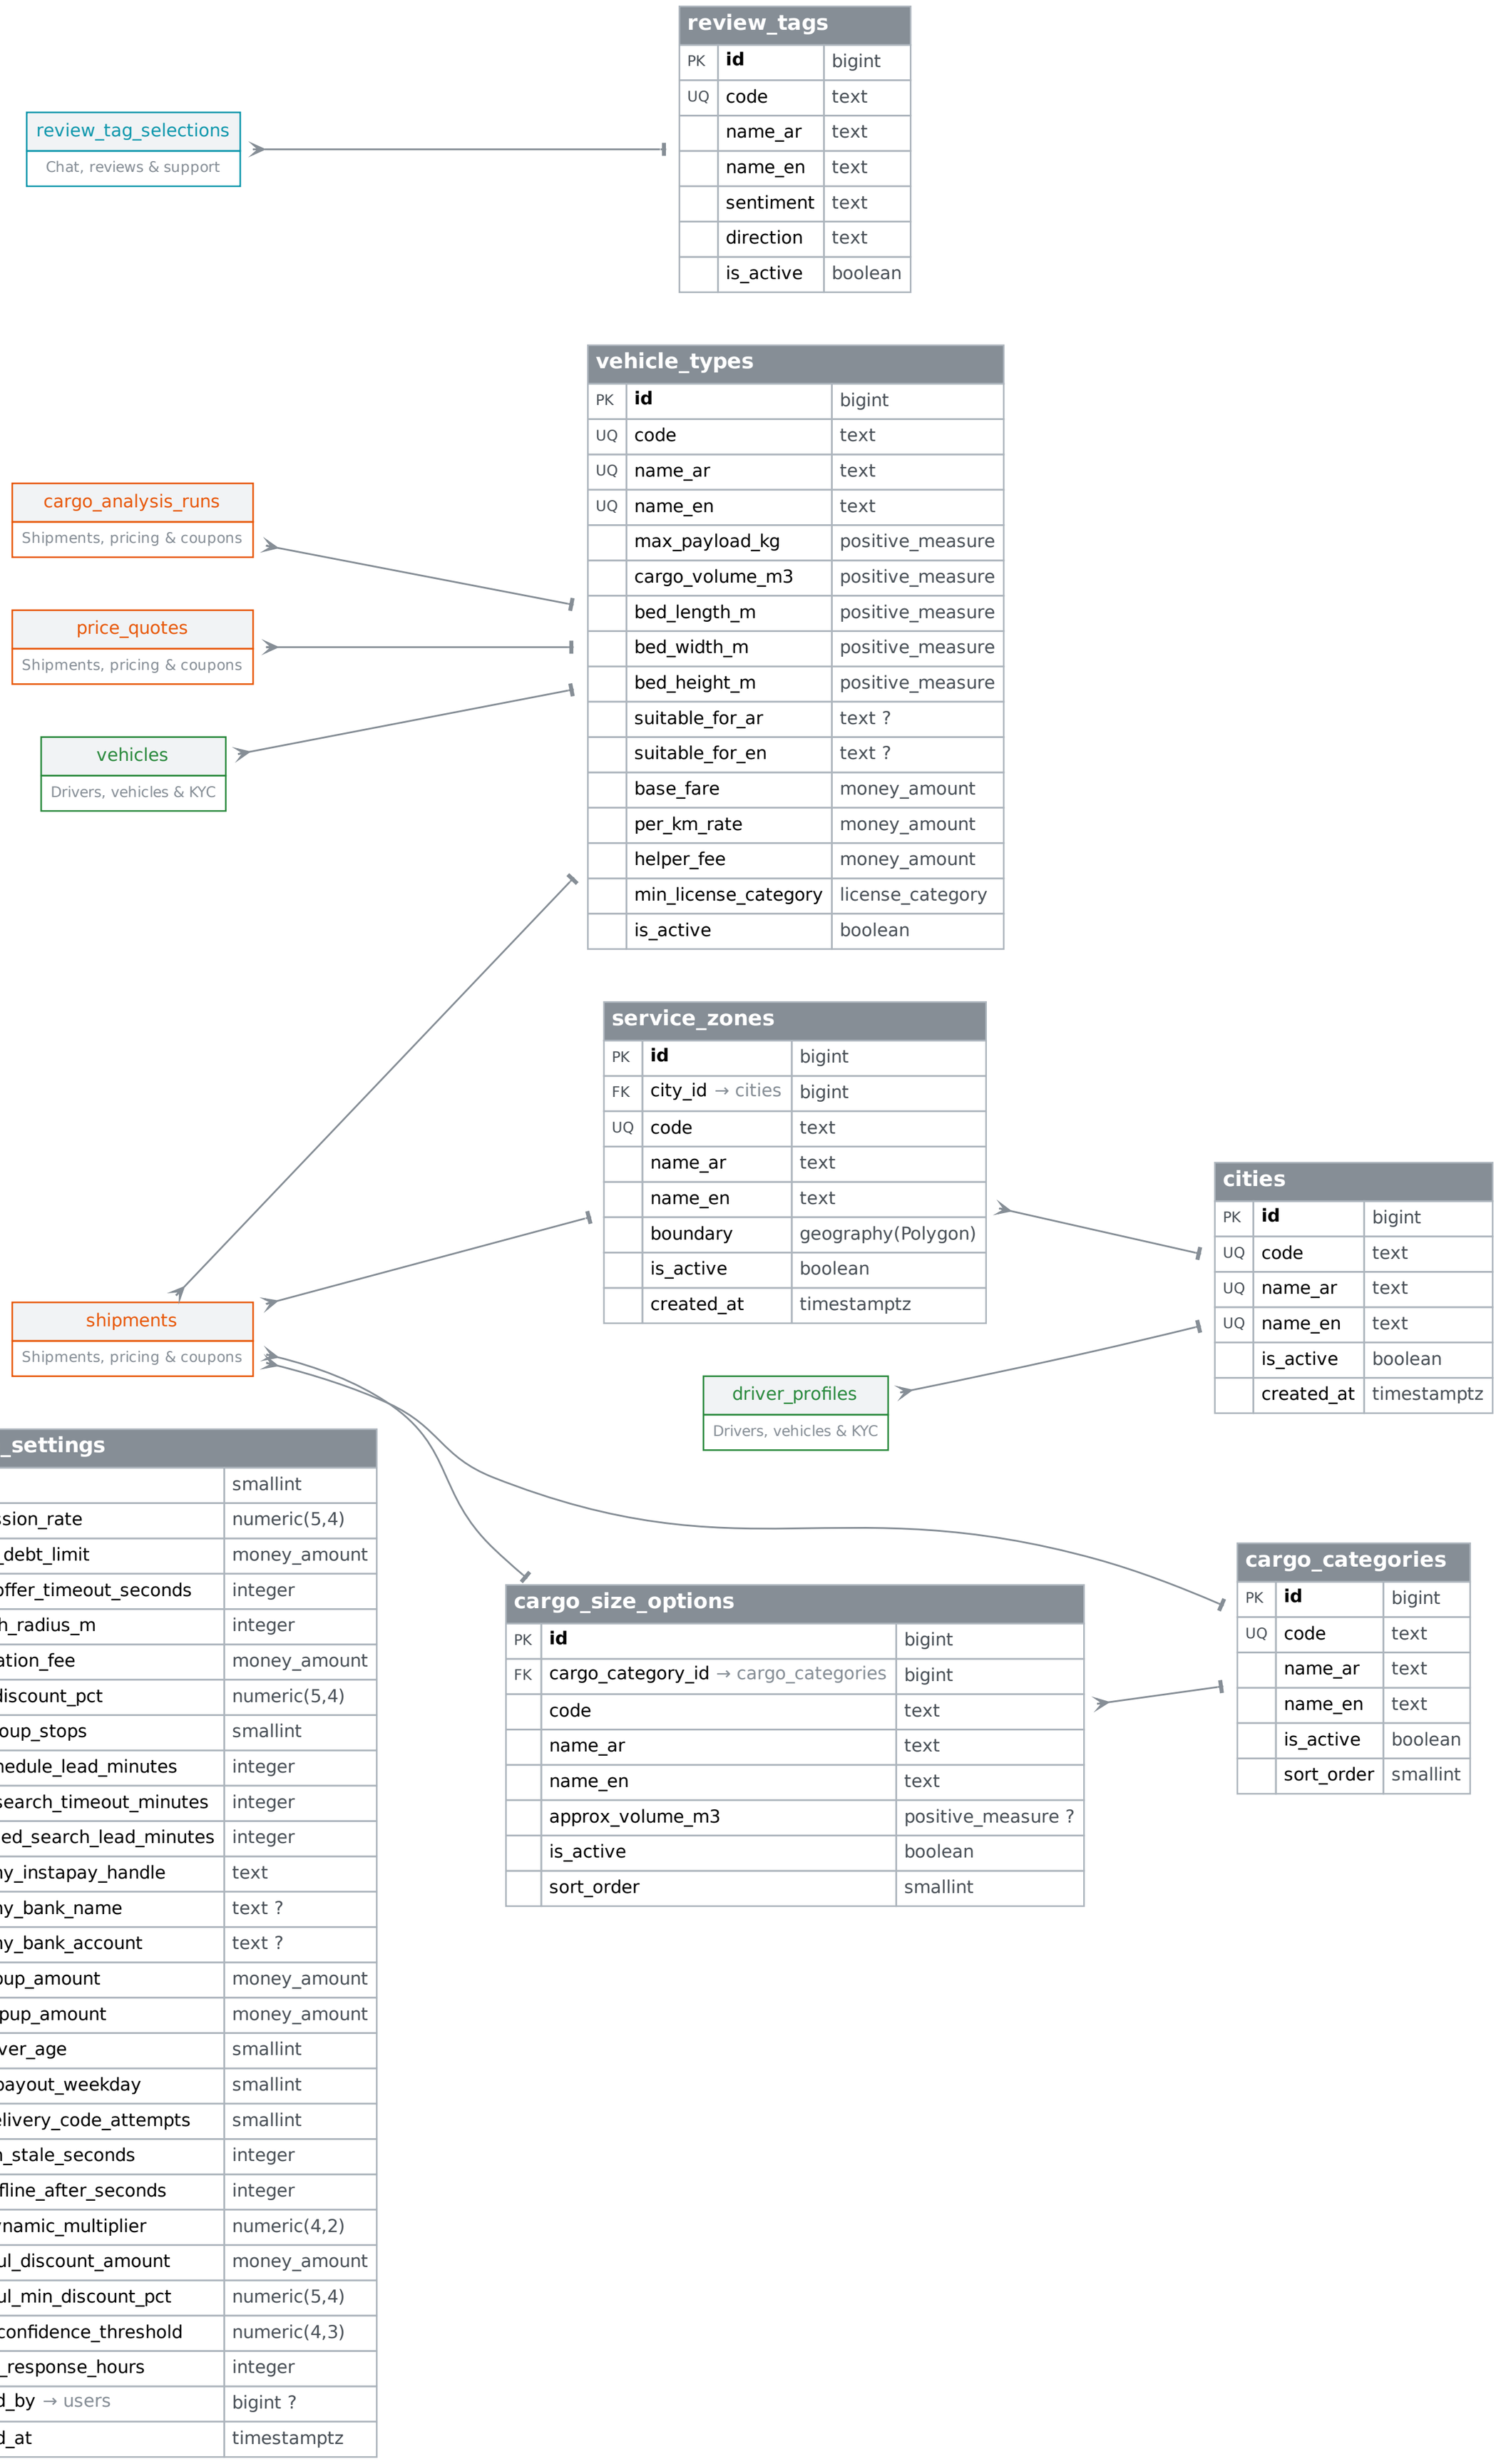


3. Drivers, vehicles & KYC (columns: PK primary key, FK foreign key, UQ unique, ? = nullable)

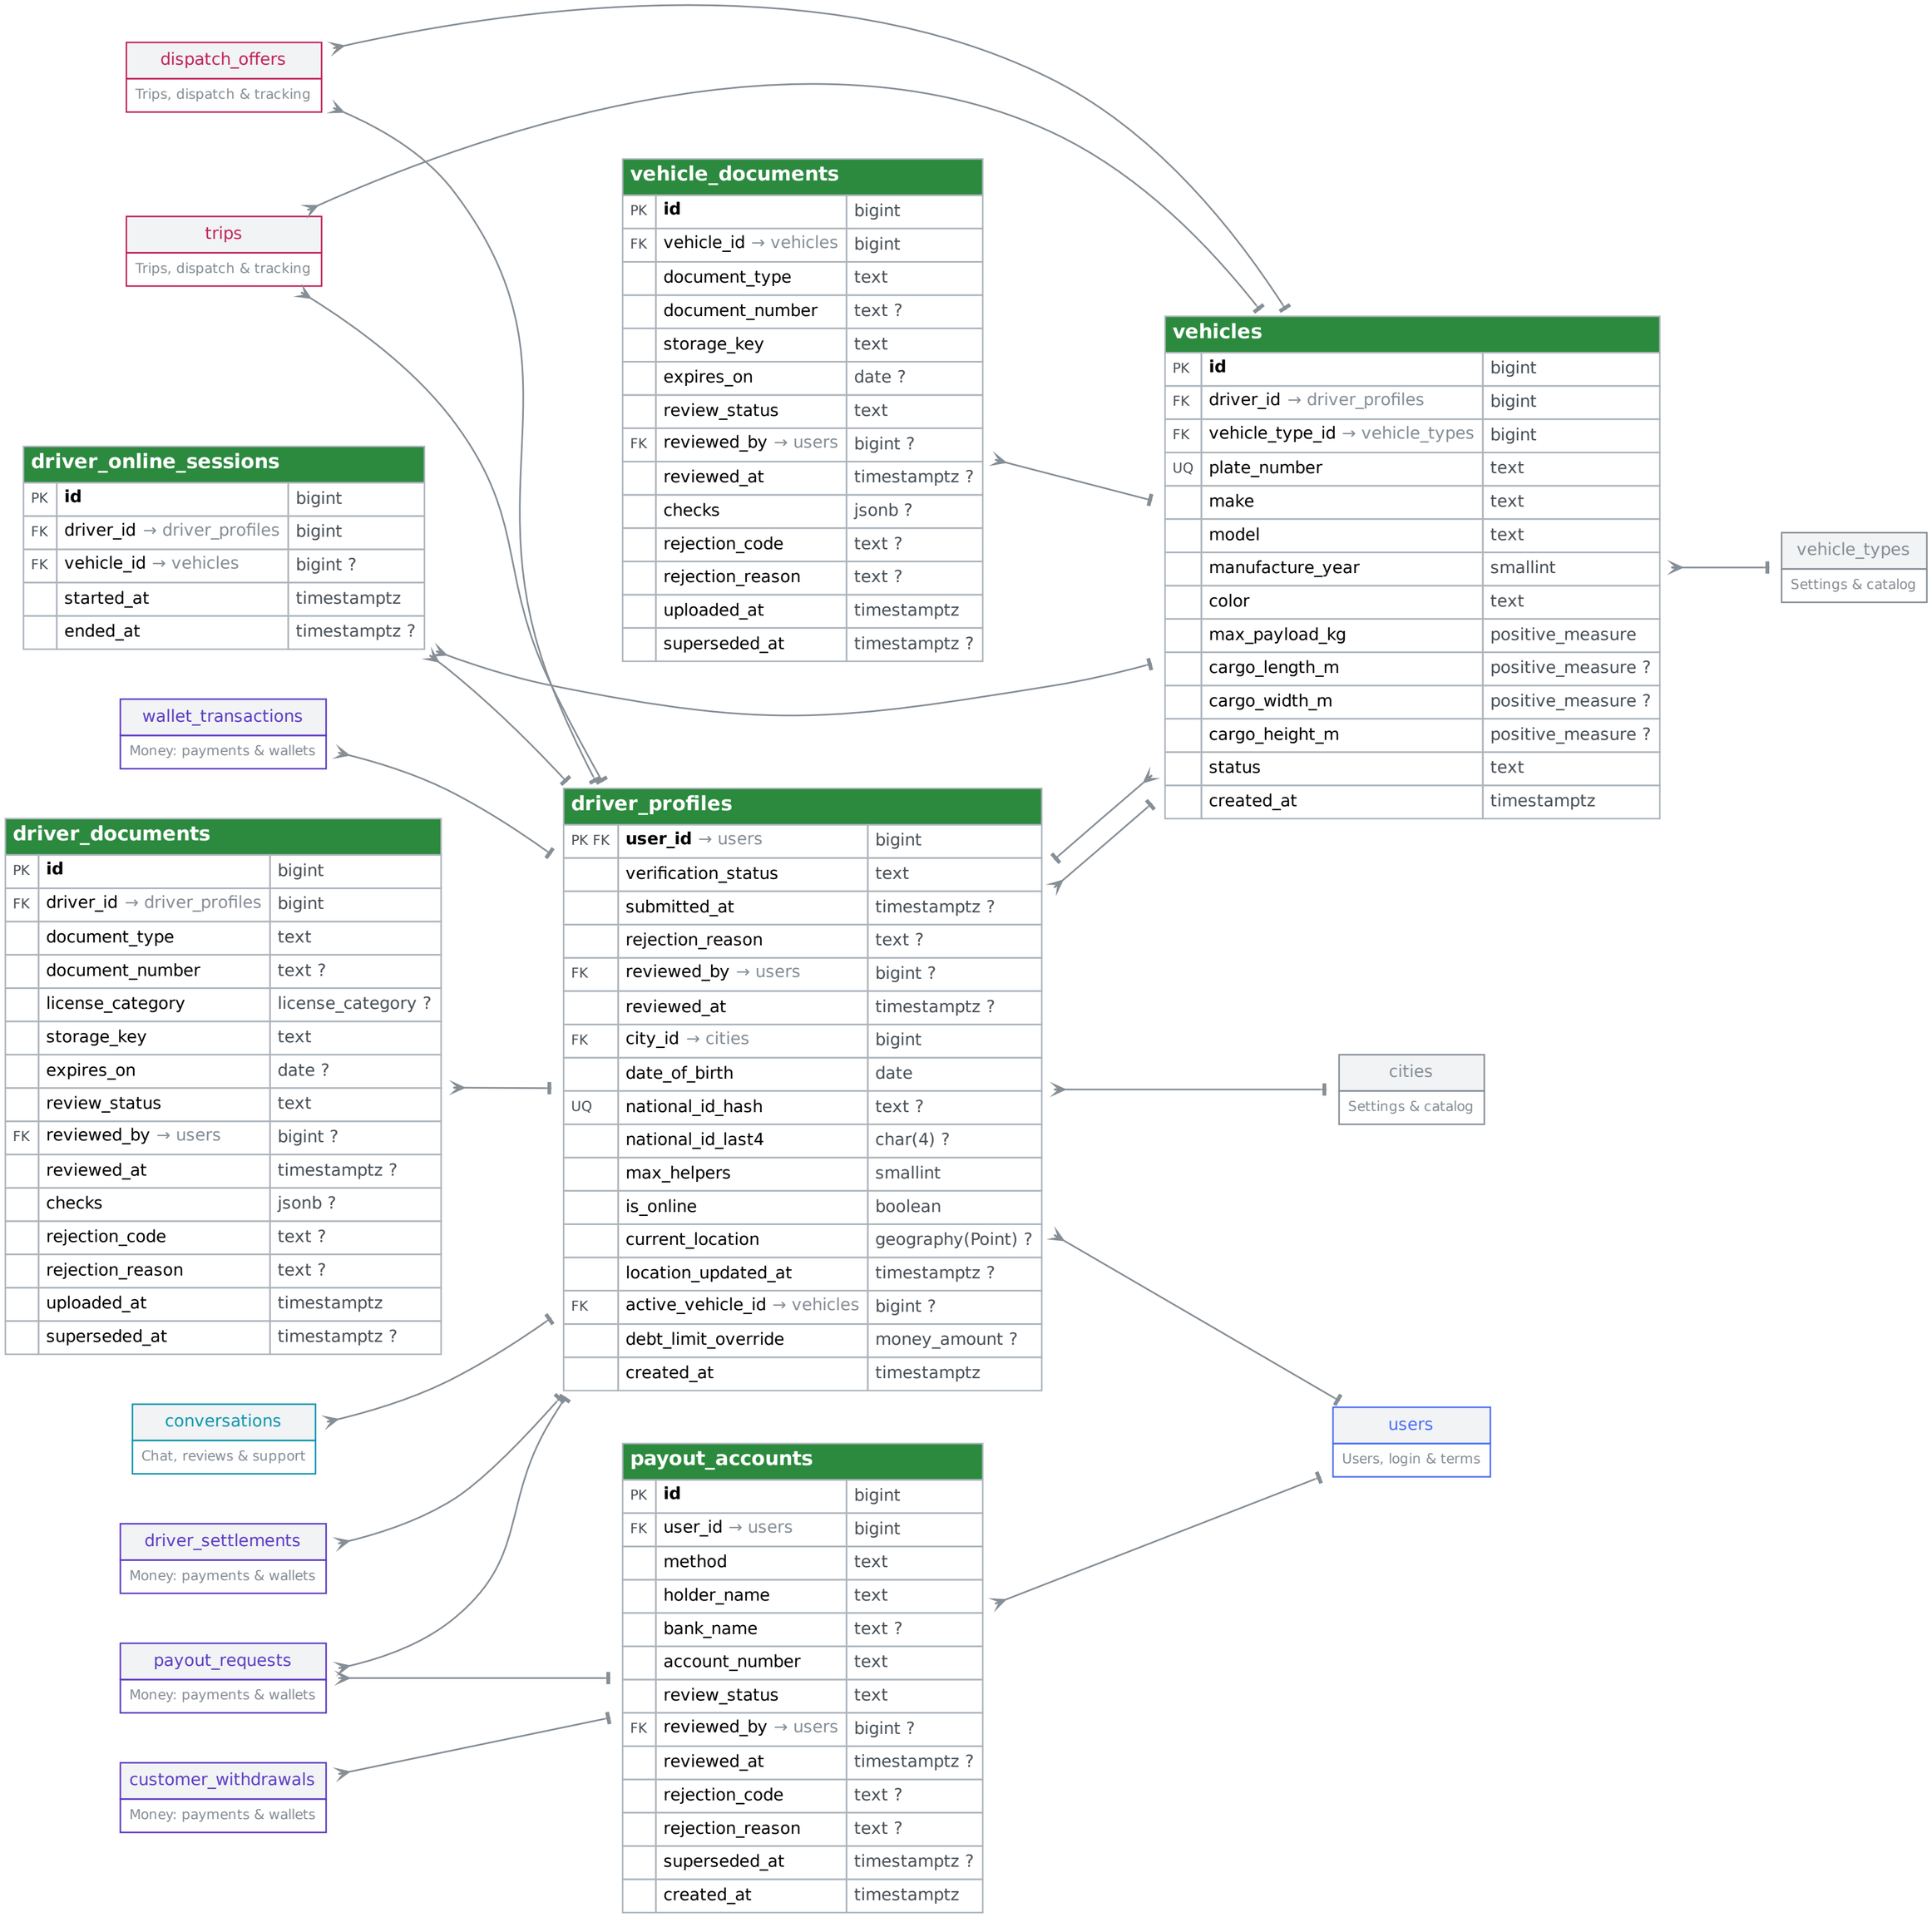


4. Shipments, pricing & coupons (columns: PK primary key, FK foreign key, UQ unique, ? = nullable)

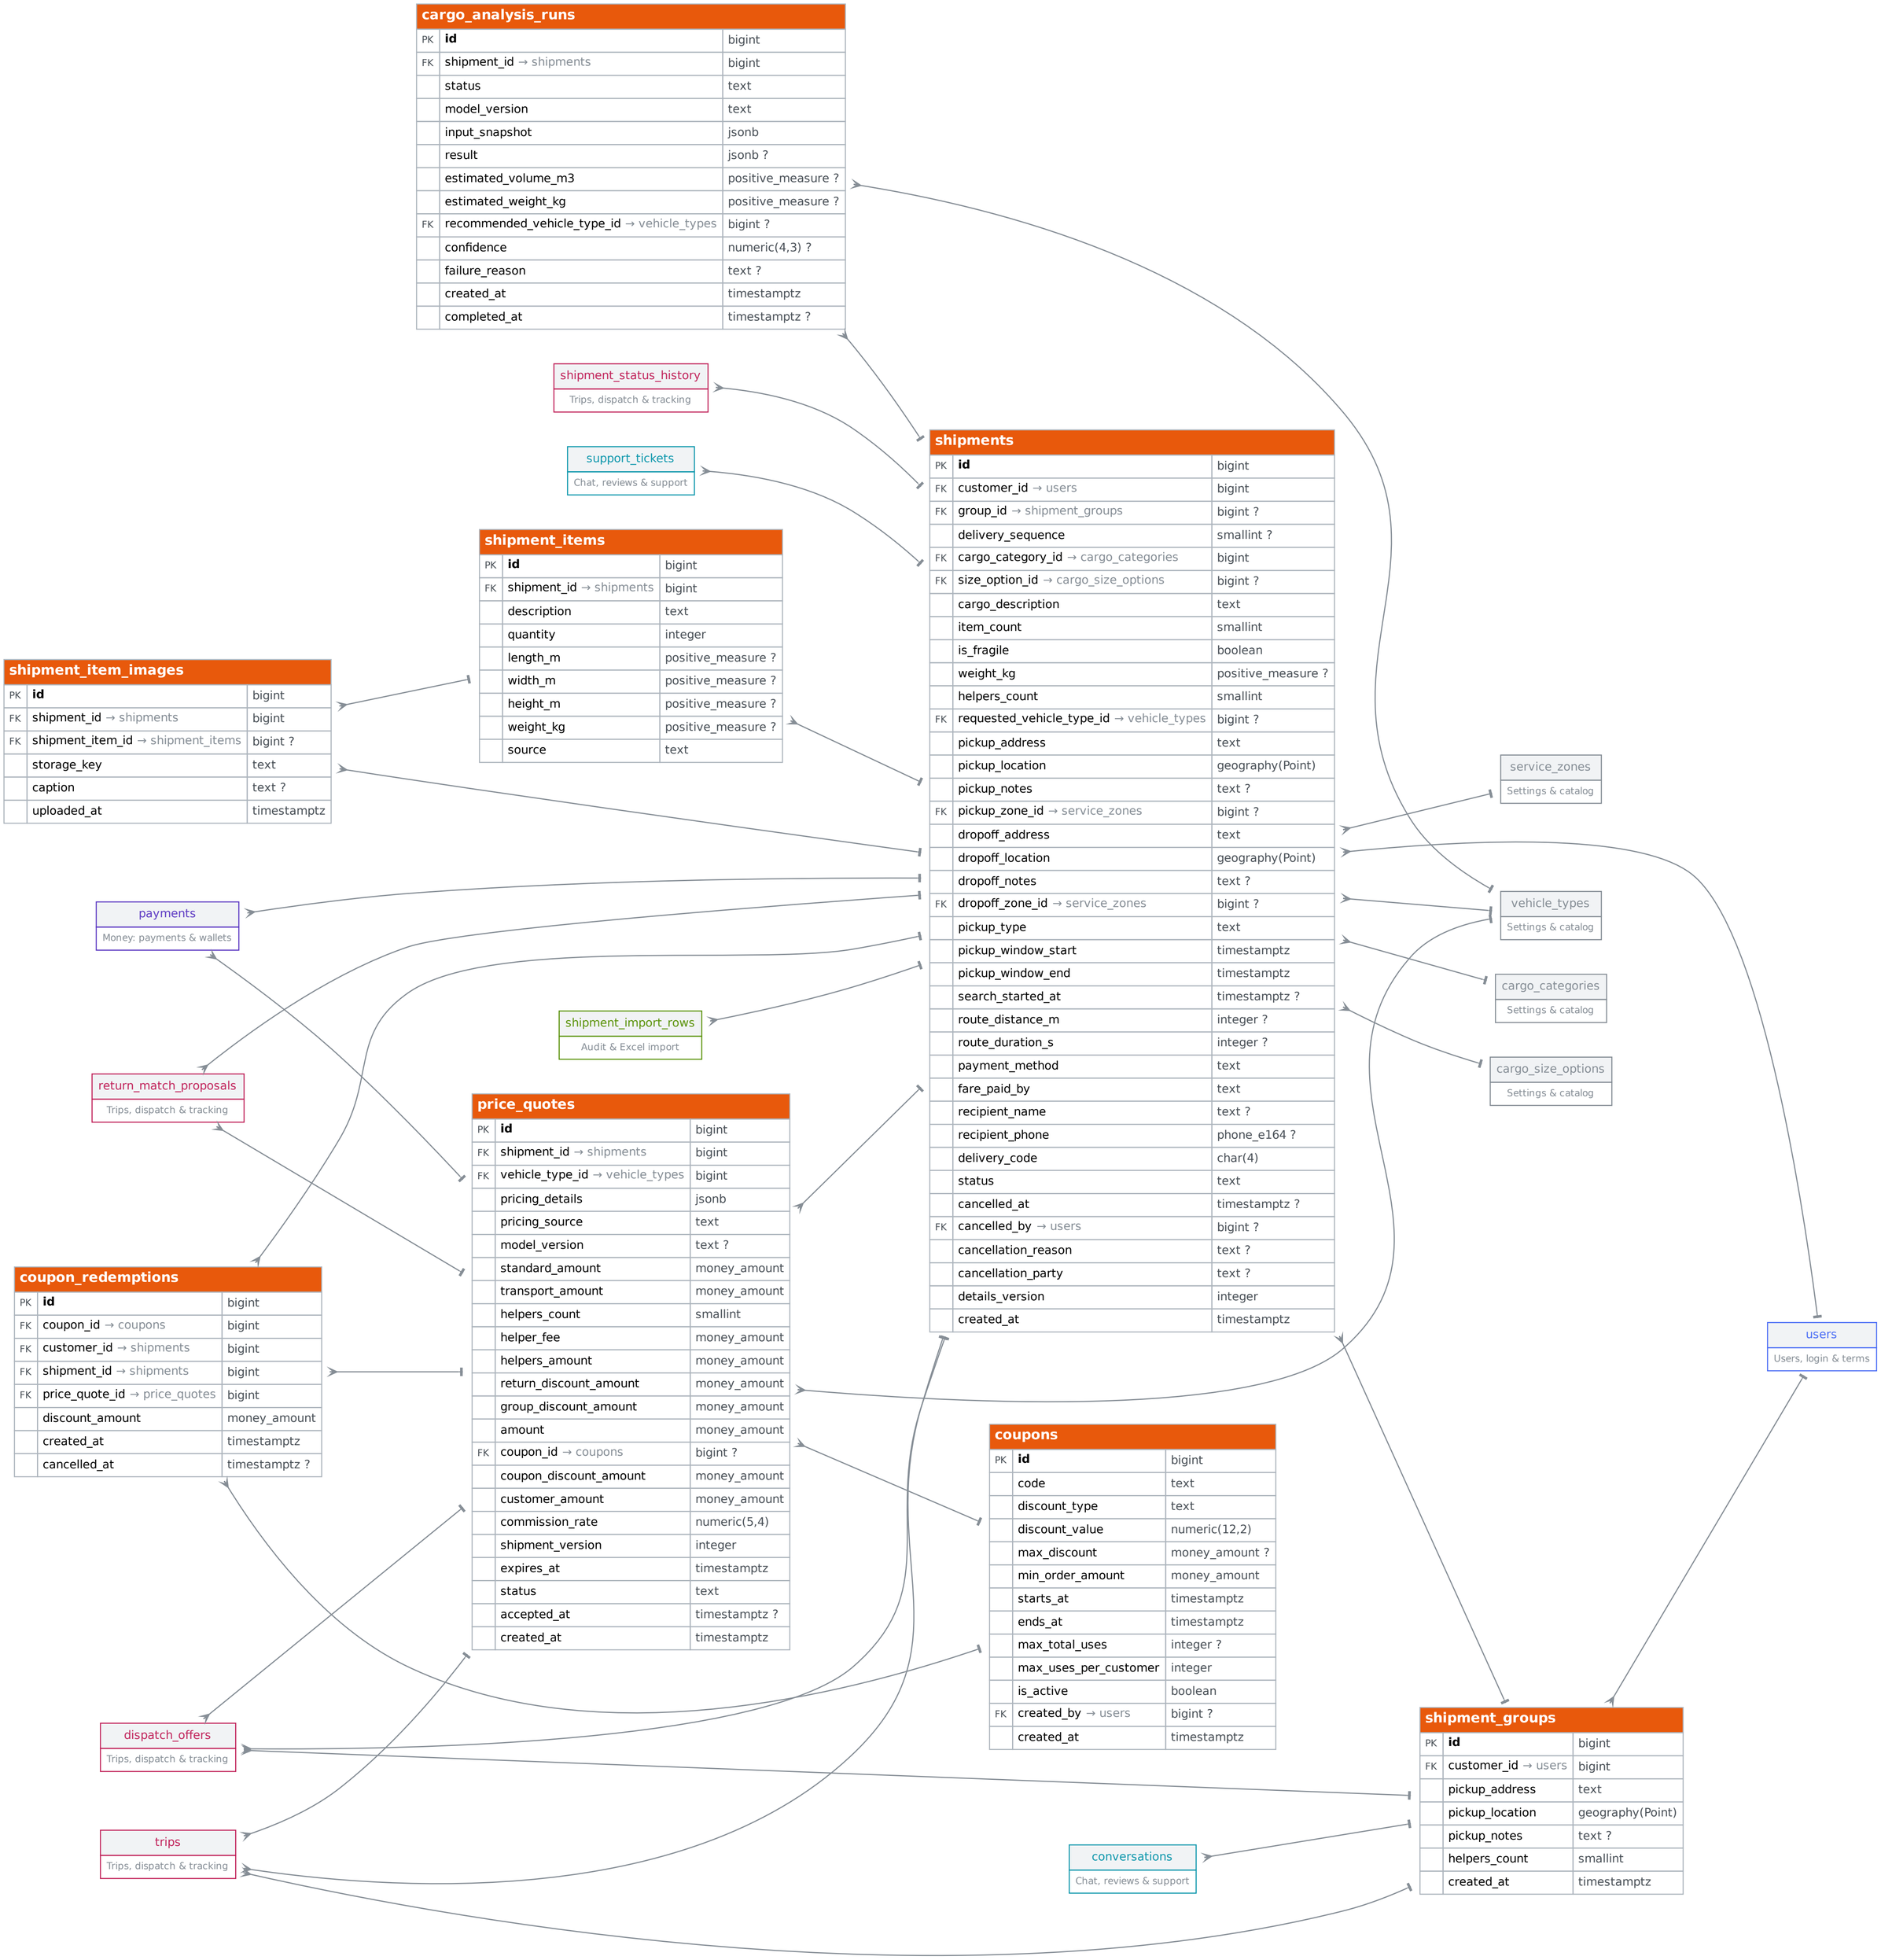

5. Trips, dispatch & tracking (columns: PK primary key, FK foreign key, UQ unique, ? = nullable)

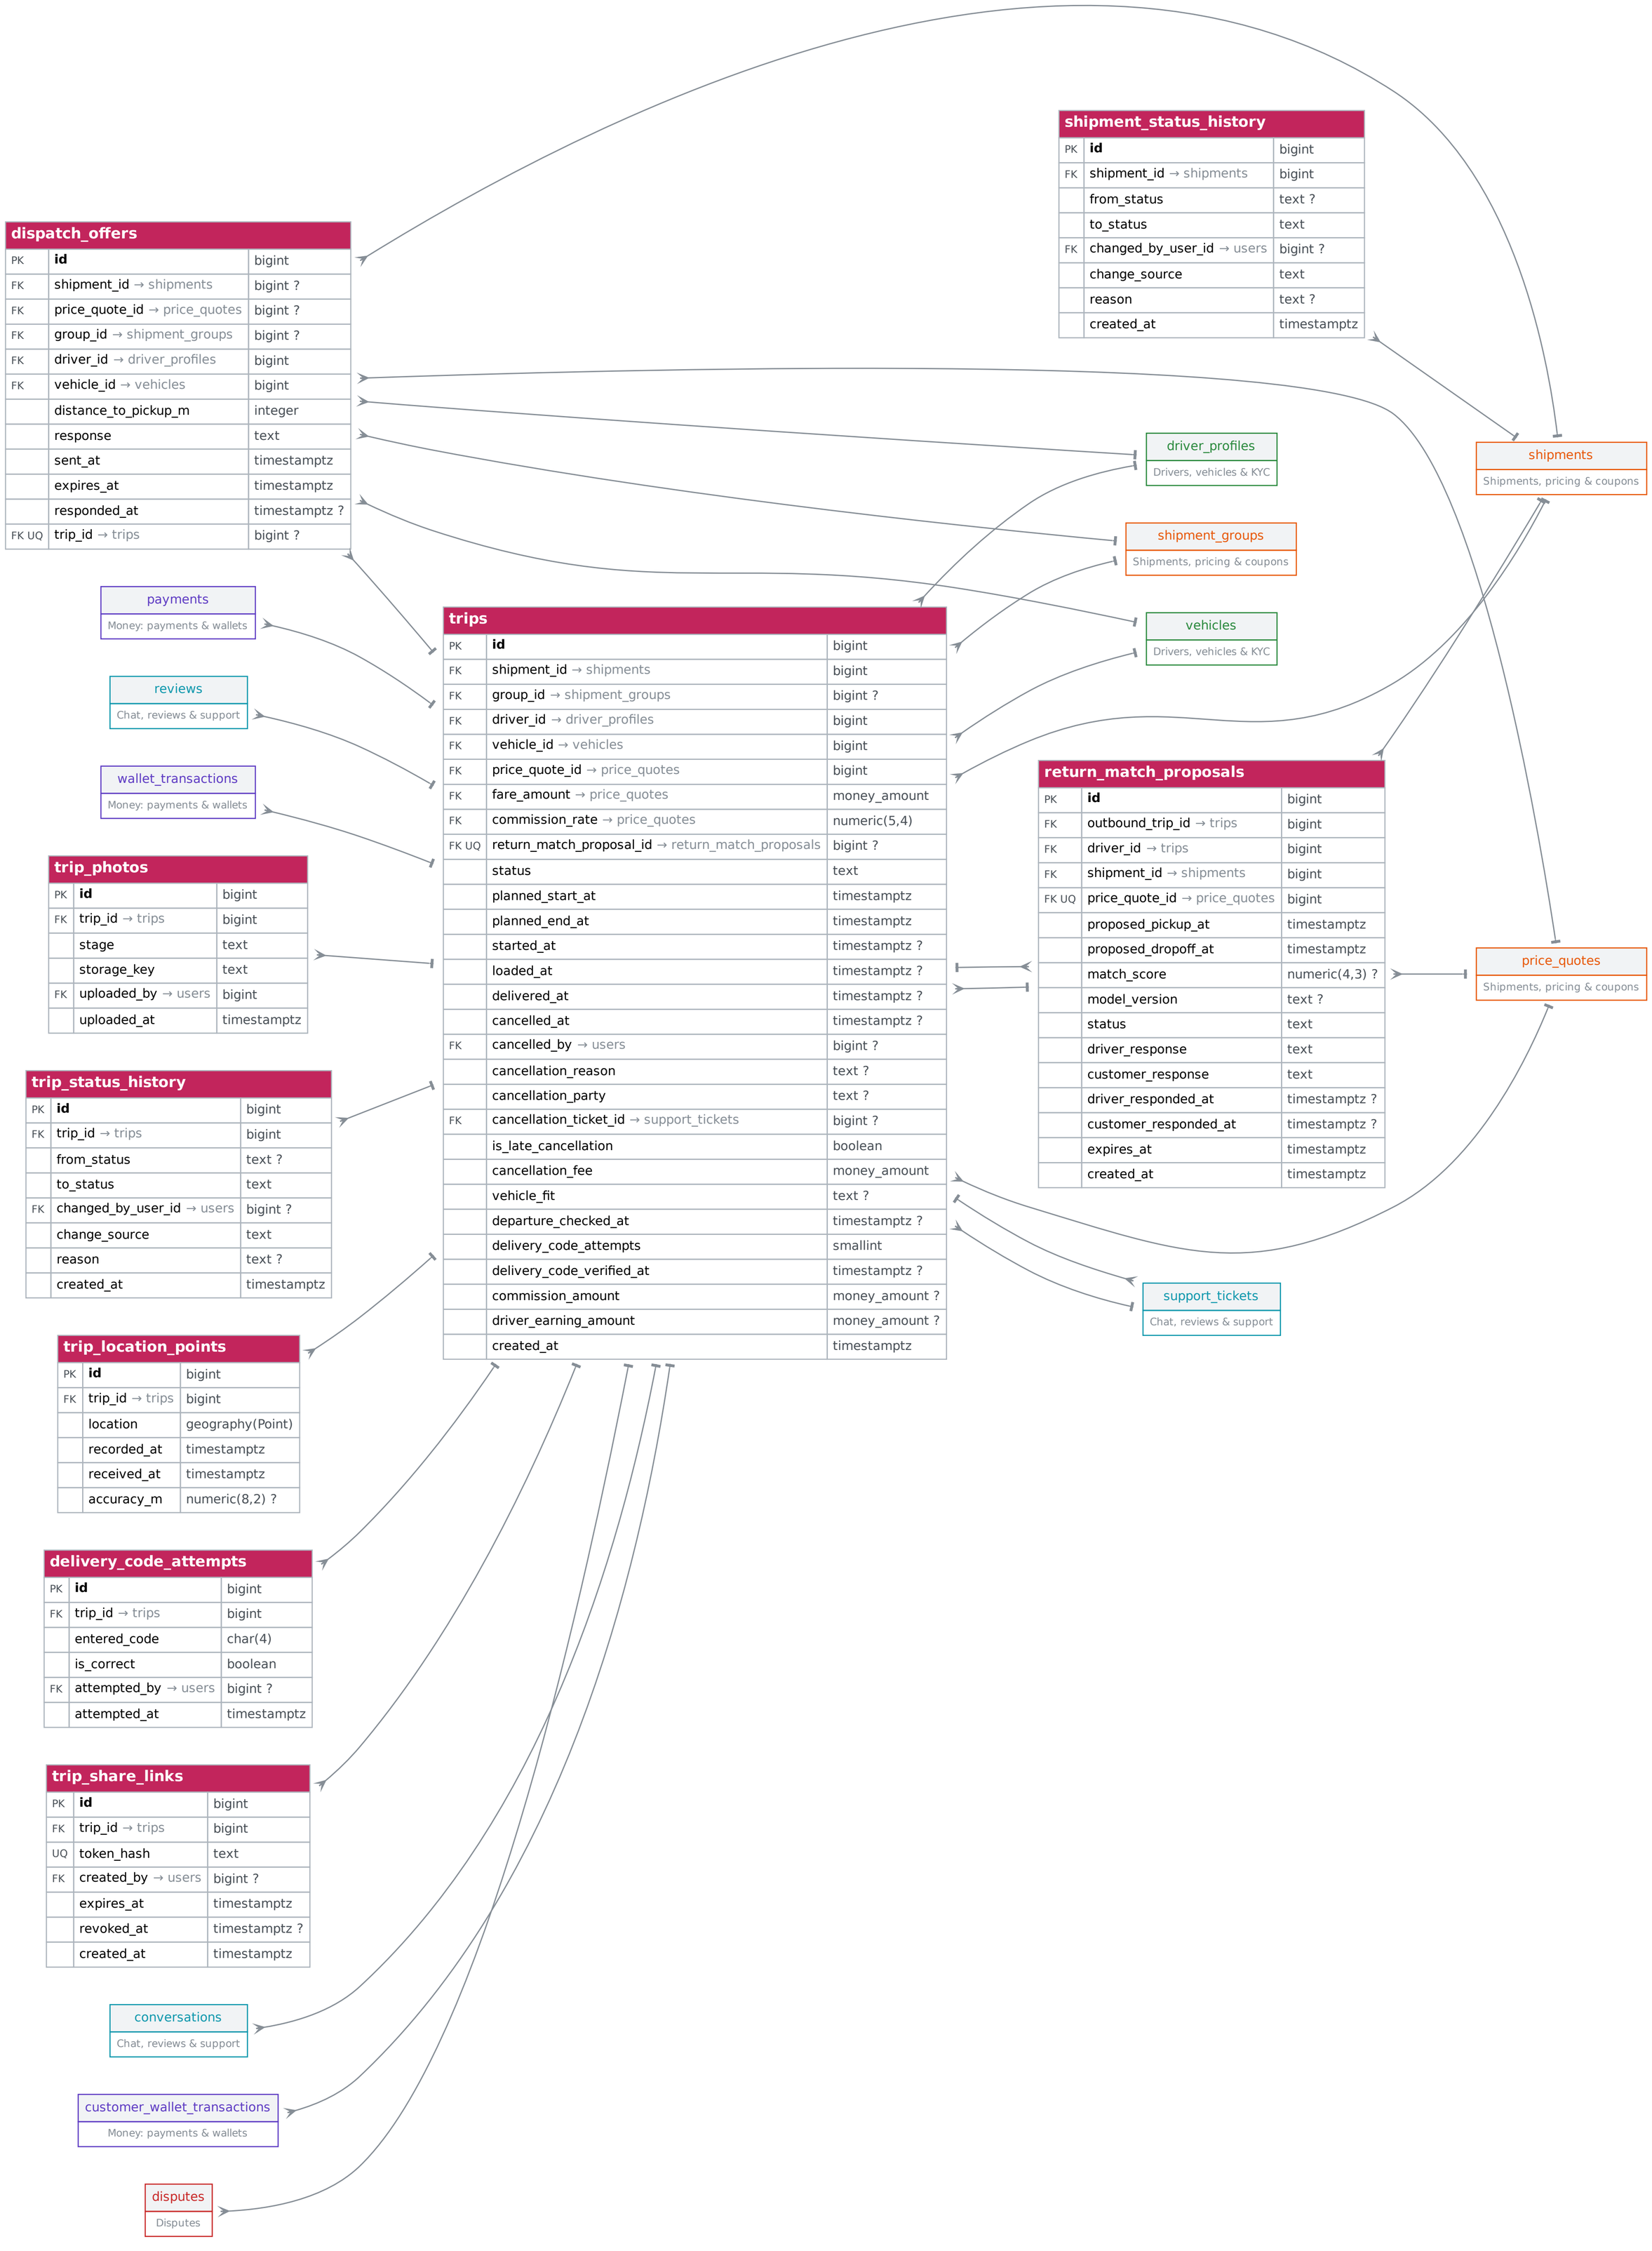

6. Money: payments & wallets (columns: PK primary key, FK foreign key, UQ unique, ? = nullable)

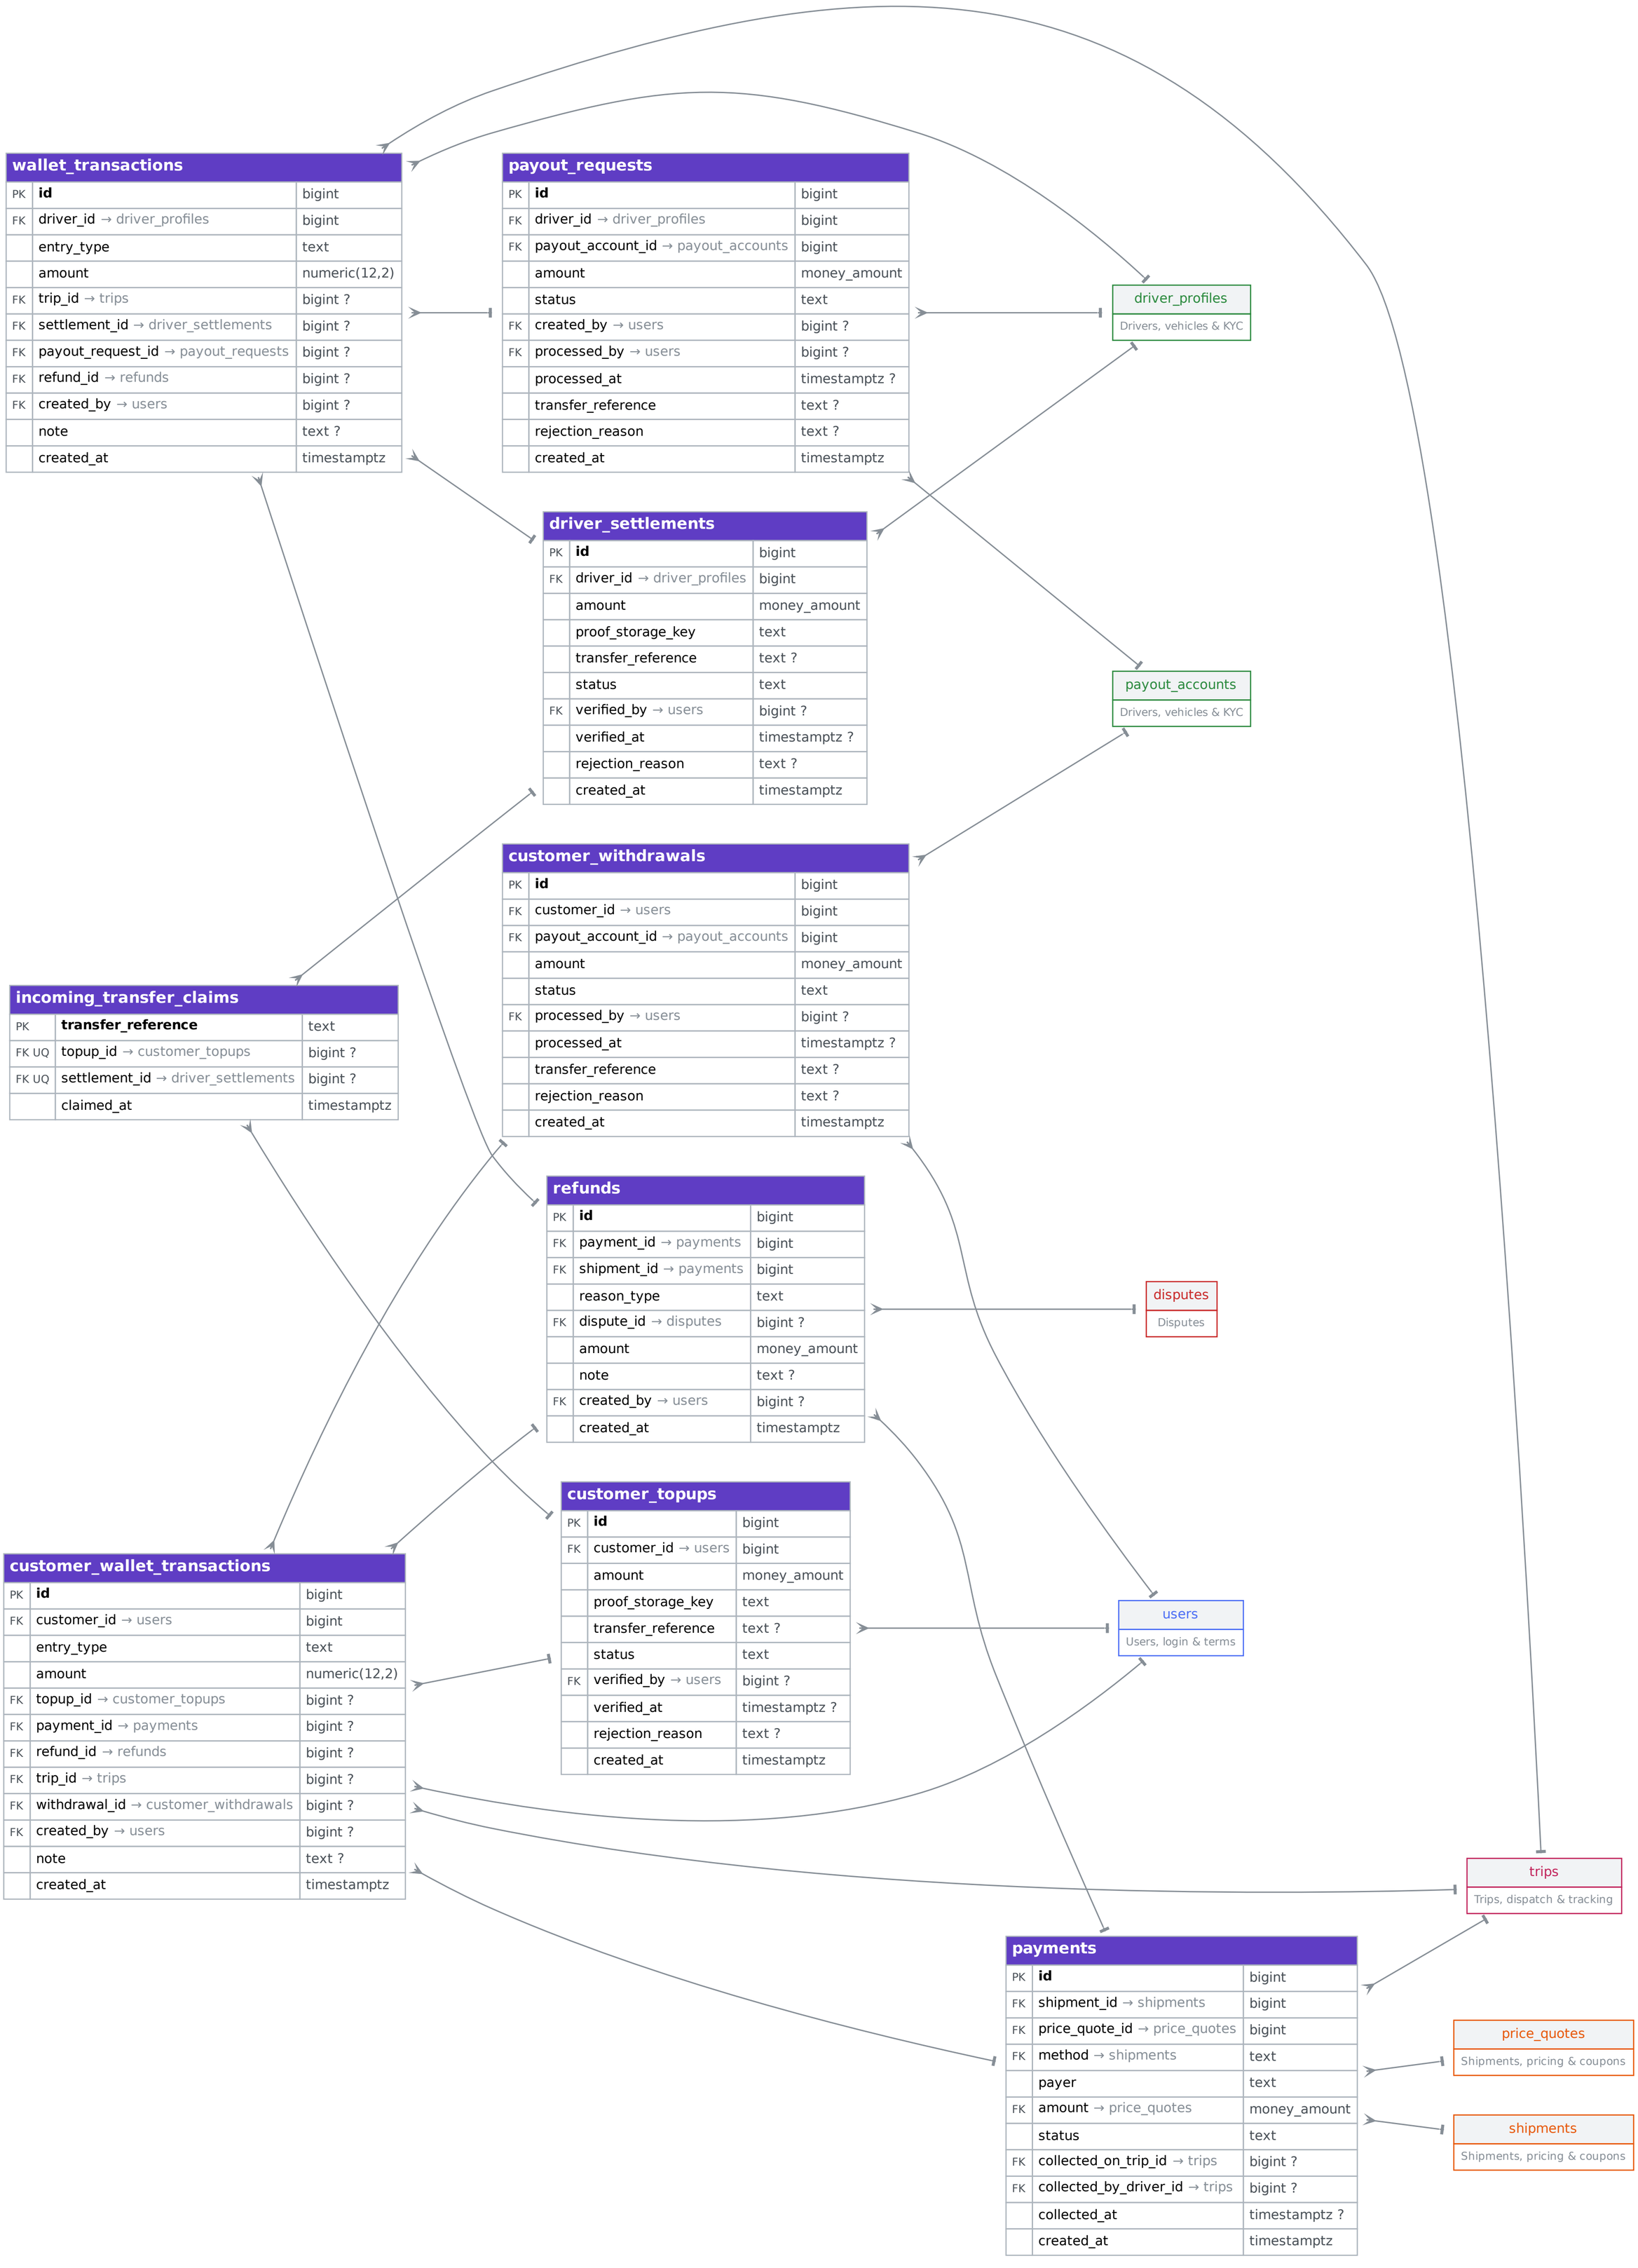

7. Disputes (columns: PK primary key, FK foreign key, UQ unique, ? = nullable)

dispute_evidence		
PK	**id**	bigint
FK	dispute_id → disputes	bigint
FK	uploaded_by → users	bigint
	storage_key	text
	uploaded_at	timestamptz

dispute_events		
PK	**id**	bigint
FK	dispute_id → disputes	bigint
	event_type	text
	from_status	text ?
	to_status	text ?
FK	actor_id → users	bigint ?
	note	text ?
	created_at	timestamptz

disputes		
PK	**id**	bigint
FK	trip_id → trips	bigint
FK	shipment_id → trips	bigint
FK	opened_by → users	bigint
	reason	text
	description	text
	requested_resolution	text
	requested_amount	money_amount ?
	respondent_statement	text ?
	responded_at	timestamptz ?
	status	text
FK	assigned_to → users	bigint ?
	priority	text
	response_due_at	timestamptz ?
	resolution	text ?
	driver_amount	money_amount ?
	customer_amount	money_amount ?
	refund_borne_by	text ?
	admin_notes	text ?
FK	resolved_by → users	bigint ?
	resolved_at	timestamptz ?
	created_at	timestamptz


trips
Trips, dispatch & tracking

users
Users, login & terms


refunds
Money: payments & wallets

support_tickets
Chat, reviews & support

8. Chat, reviews & support (columns: PK primary key, FK foreign key, UQ unique, ? = nullable)

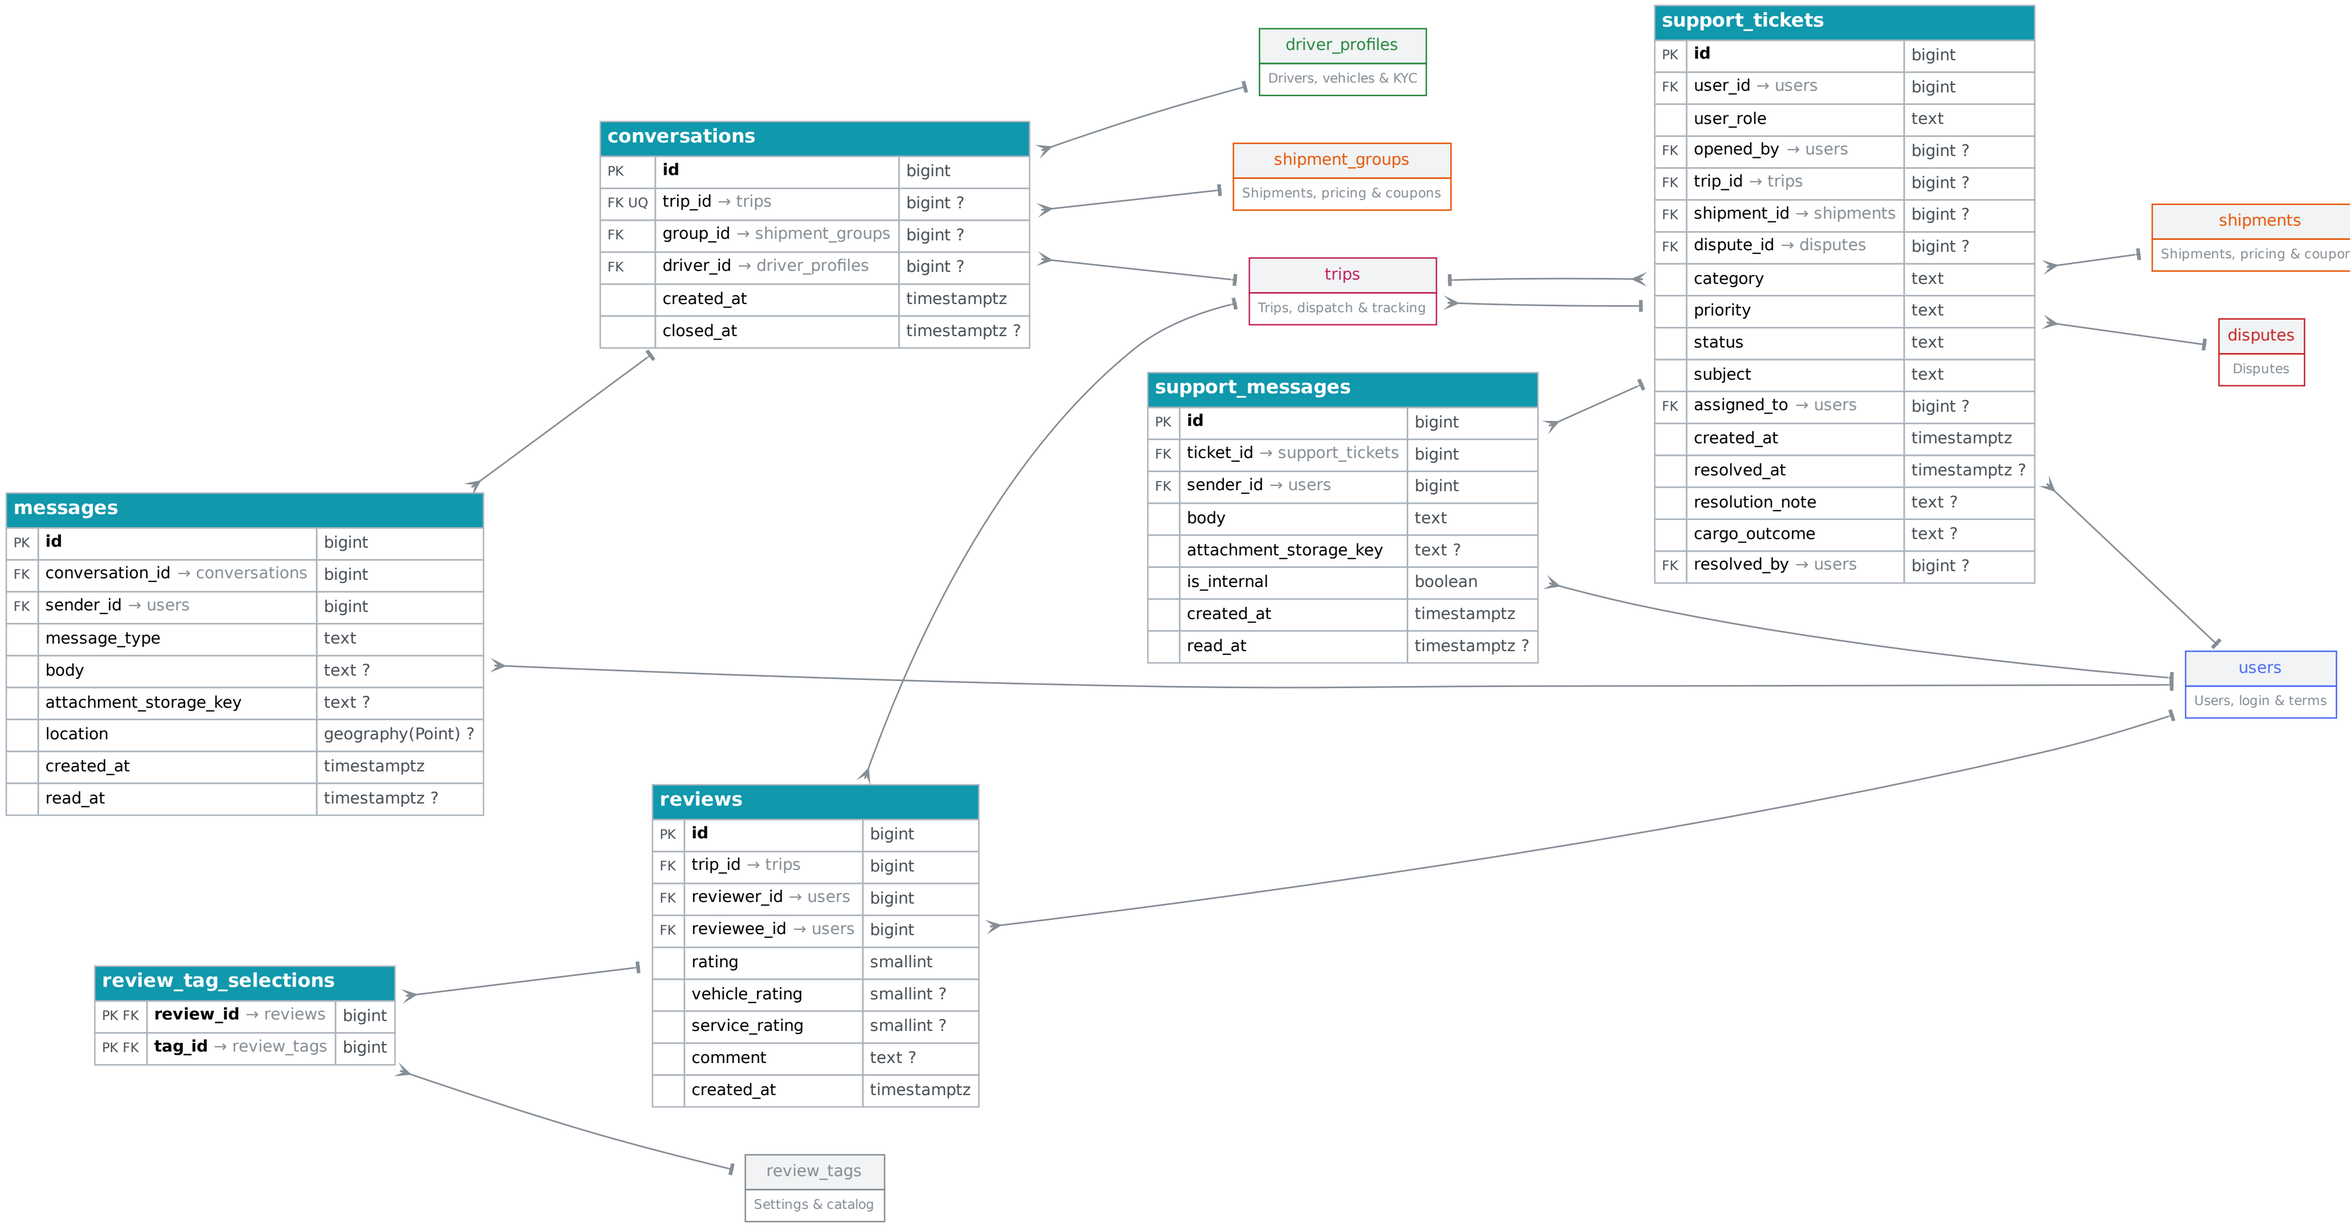

9. Audit & Excel import (columns: PK primary key, FK foreign key, UQ unique, ? = nullable)

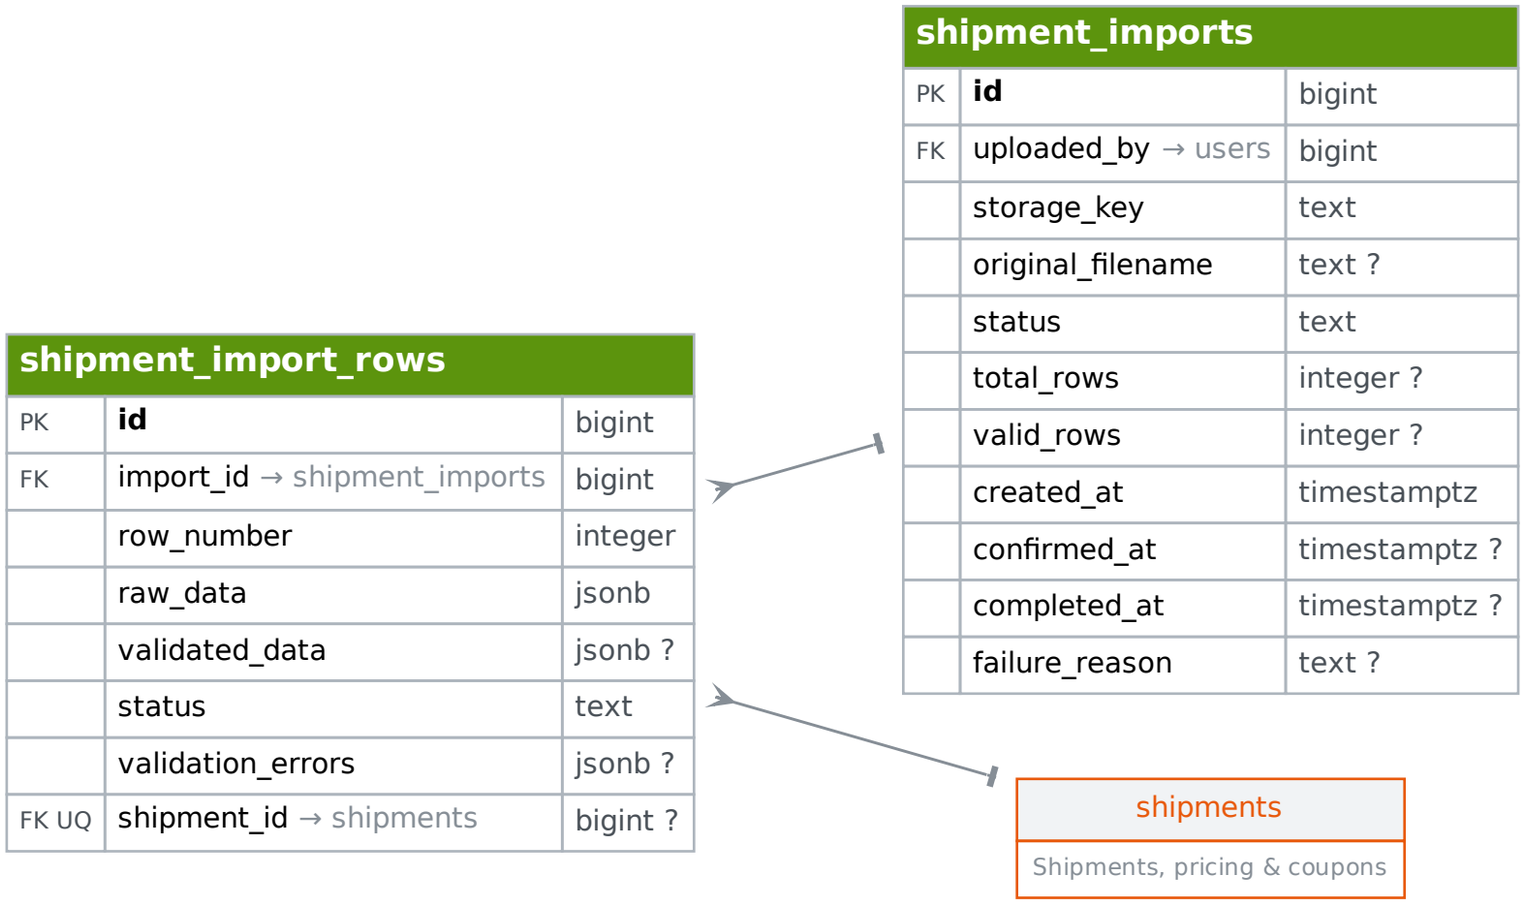

admin_audit_log		
PK	**id**	bigint
FK	actor_id → users	bigint ?
	actor_role	text
	action	text
	table_name	text
	row_id	text
	before	jsonb ?
	after	jsonb ?
	reason	text ?
	created_at	timestamptz