

# LAB 2


## SWITCH

**TASK 1&2: IP ASSIGNMENT and PING command to check connetivity**

**VPC1 IP: 50.0.0.10 SUBNET MASK: 255.0.0.0**

**VPC2 IP: 50.0.0.30 SUBNET MASK: 255.0.0.0**

**VPC3 IP: 50.0.0.20 SUBNET MASK: 255.0.0.0**

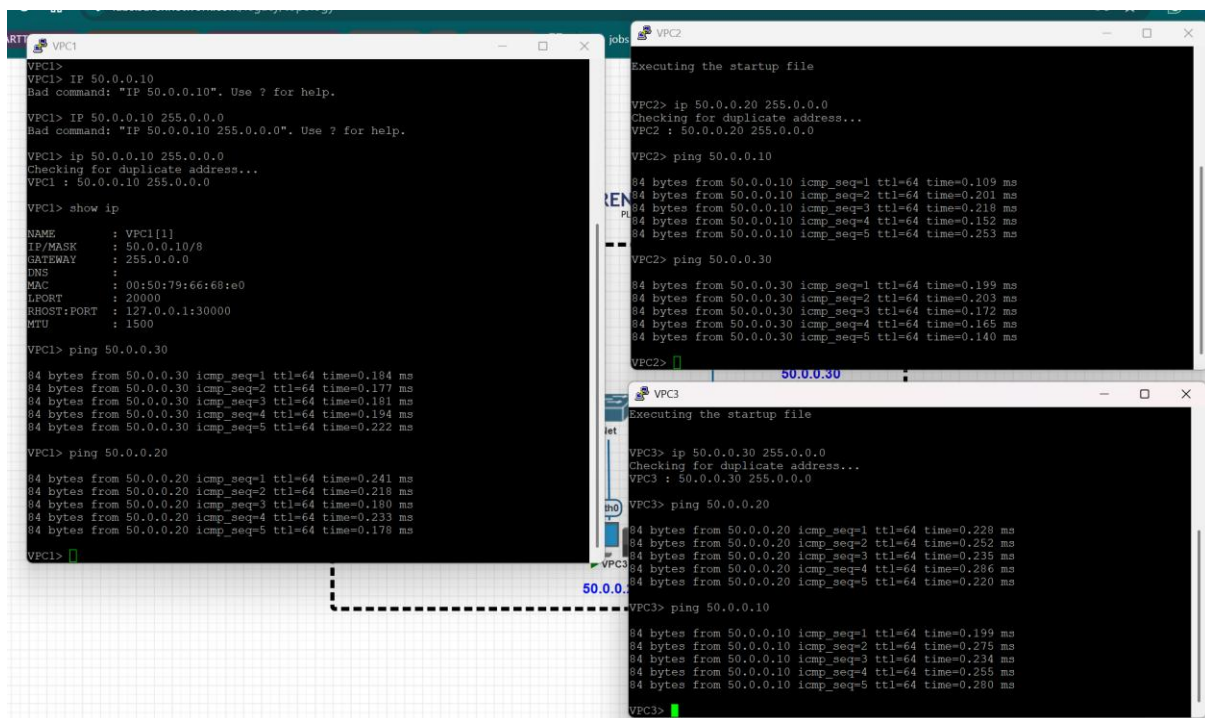

The image displays three terminal windows from a network simulation, likely Packet Tracer, showing the configuration and connectivity testing for three Virtual Private Clouds (VPCs).

**VPC1 Terminal:**

```
VPC1>
VPC1> IP 50.0.0.10
Bad command: "IP 50.0.0.10". Use ? for help.

VPC1> IP 50.0.0.10 255.0.0.0
Bad command: "IP 50.0.0.10 255.0.0.0". Use ? for help.

VPC1> ip 50.0.0.10 255.0.0.0
Checking for duplicate address...
VPC1 : 50.0.0.10 255.0.0.0

VPC1> show ip
NAME       : VPC1[1]
IP/MASK    : 50.0.0.10/8
GATEWAY    : 255.0.0.0
DNS        :
MAC        : 00:50:79:66:68:e0
LPORT      : 20000
RHOST:PORT : 127.0.0.1:30000
MTU        : 1500

VPC1> ping 50.0.0.30
84 bytes from 50.0.0.30 icmp_seq=1 ttl=64 time=0.184 ms
84 bytes from 50.0.0.30 icmp_seq=2 ttl=64 time=0.177 ms
84 bytes from 50.0.0.30 icmp_seq=3 ttl=64 time=0.181 ms
84 bytes from 50.0.0.30 icmp_seq=4 ttl=64 time=0.194 ms
84 bytes from 50.0.0.30 icmp_seq=5 ttl=64 time=0.222 ms

VPC1> ping 50.0.0.20
84 bytes from 50.0.0.20 icmp_seq=1 ttl=64 time=0.241 ms
84 bytes from 50.0.0.20 icmp_seq=2 ttl=64 time=0.218 ms
84 bytes from 50.0.0.20 icmp_seq=3 ttl=64 time=0.180 ms
84 bytes from 50.0.0.20 icmp_seq=4 ttl=64 time=0.233 ms
84 bytes from 50.0.0.20 icmp_seq=5 ttl=64 time=0.178 ms

VPC1>
```

**VPC2 Terminal:**

```
Executing the startup file

VPC2> ip 50.0.0.20 255.0.0.0
Checking for duplicate address...
VPC2 : 50.0.0.20 255.0.0.0

VPC2> ping 50.0.0.10
84 bytes from 50.0.0.10 icmp_seq=1 ttl=64 time=0.109 ms
84 bytes from 50.0.0.10 icmp_seq=2 ttl=64 time=0.201 ms
84 bytes from 50.0.0.10 icmp_seq=3 ttl=64 time=0.218 ms
84 bytes from 50.0.0.10 icmp_seq=4 ttl=64 time=0.152 ms
84 bytes from 50.0.0.10 icmp_seq=5 ttl=64 time=0.253 ms

VPC2> ping 50.0.0.30
84 bytes from 50.0.0.30 icmp_seq=1 ttl=64 time=0.199 ms
84 bytes from 50.0.0.30 icmp_seq=2 ttl=64 time=0.203 ms
84 bytes from 50.0.0.30 icmp_seq=3 ttl=64 time=0.172 ms
84 bytes from 50.0.0.30 icmp_seq=4 ttl=64 time=0.165 ms
84 bytes from 50.0.0.30 icmp_seq=5 ttl=64 time=0.140 ms

VPC2>
```

**VPC3 Terminal:**

```
Executing the startup file

VPC3> ip 50.0.0.30 255.0.0.0
Checking for duplicate address...
VPC3 : 50.0.0.30 255.0.0.0

VPC3> ping 50.0.0.20
84 bytes from 50.0.0.20 icmp_seq=1 ttl=64 time=0.228 ms
84 bytes from 50.0.0.20 icmp_seq=2 ttl=64 time=0.252 ms
84 bytes from 50.0.0.20 icmp_seq=3 ttl=64 time=0.238 ms
84 bytes from 50.0.0.20 icmp_seq=4 ttl=64 time=0.286 ms
84 bytes from 50.0.0.20 icmp_seq=5 ttl=64 time=0.220 ms

VPC3> ping 50.0.0.10
84 bytes from 50.0.0.10 icmp_seq=1 ttl=64 time=0.199 ms
84 bytes from 50.0.0.10 icmp_seq=2 ttl=64 time=0.275 ms
84 bytes from 50.0.0.10 icmp_seq=3 ttl=64 time=0.234 ms
84 bytes from 50.0.0.10 icmp_seq=4 ttl=64 time=0.255 ms
84 bytes from 50.0.0.10 icmp_seq=5 ttl=64 time=0.280 ms

VPC3>
```