INE Skill Check Lab Report
Assessment Methodologies: Vulnerability Assessment CTF 1

Target: http://target.ine.local
Tools Used: Nmap, Nessus, Directory Enumeration, phpMyAdmin, Git Repository Analysis

Flags Captured

Flag	MD5 Value
FLAG1	ce739245692c4fe49320673542df7683
FLAG2	347fcb99f6fa4f72a9083663bb814544
FLAG3	7e1209dcdb294e8e91a4e7d721def676
FLAG4	b00b0637ed4d4353826d1899391ffa02

Flag 1 – Exposed Git Repository

Directory enumeration revealed an exposed .git repository. After downloading the repository contents, a file named flag.txt was discovered which contained the first flag.

```
┌──(root㉿INE)-[~/Desktop/wordlists]
└─# smbclient //target.ine.local/pubfiles -N
Try "help" to get a list of possible commands.
smb: \> ls
  .                                   D        0  Fri Mar 13 02:39:25 2026
  ..                                  D        0  Tue Nov 19 10:44:41 2024
  flag1.txt                           N       40  Fri Mar 13 02:39:25 2026

                2112647088 blocks of size 1024. 177450056 blocks available
smb: \> get flag1.txt
getting file \flag1.txt of size 40 as flag1.txt (39.1 KiloBytes/sec) (average 39.1 KiloBytes/sec)
smb: \> ^Z
[1]+  Stopped                 smbclient //target.ine.local/pubfiles -N

┌──(root㉿INE)-[~/Desktop/wordlists]
└─# cat flag1.txt
FLAG1{ac0b2ab046944fa9a126aa0c0661d1ee}
```

Flag 2 – Database Exposure via phpMyAdmin

phpMyAdmin was accessible without authentication. Browsing the database revealed a table named secret_info containing the second flag.

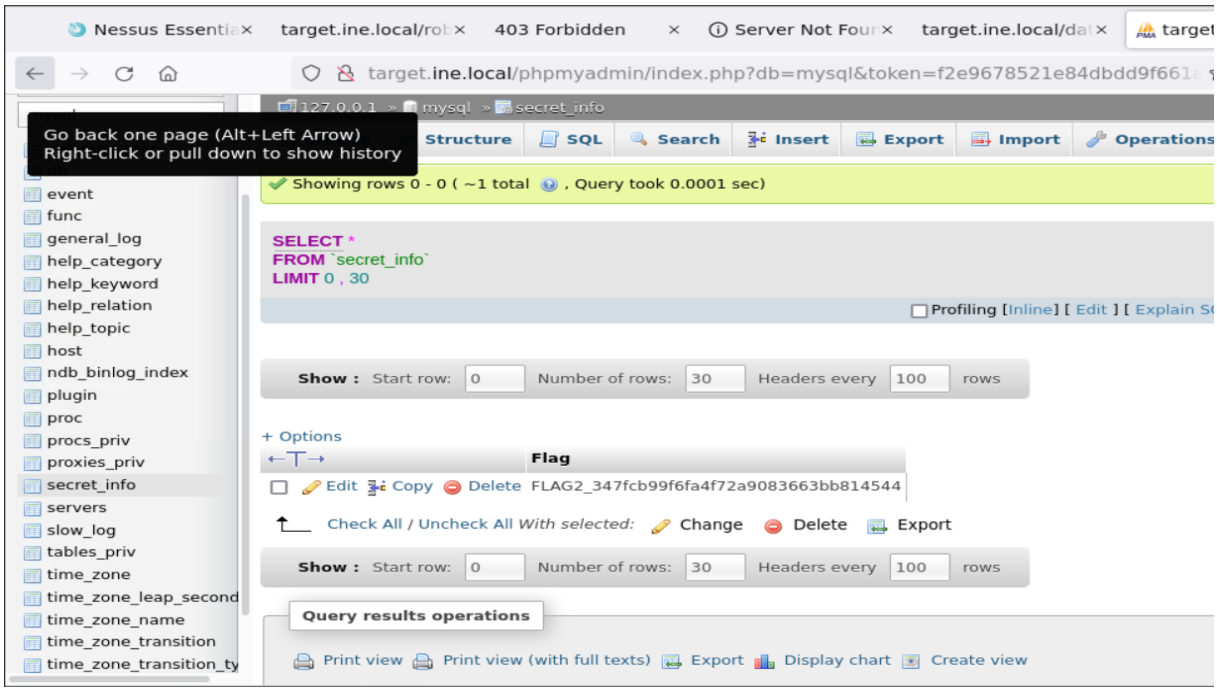

Flag 3 – Information Disclosure via phpinfo()

A phpinfo() page was publicly accessible and revealed sensitive server configuration information including the third flag.

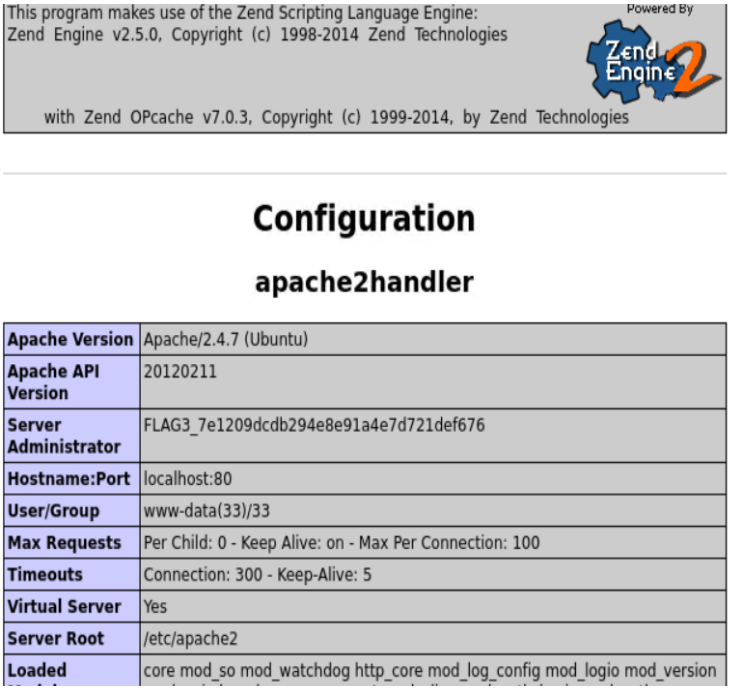

Flag 4 – Sensitive Directory Exposure

A sensitive directory /passwords was accessible on the server and contained the final flag.

FLAG4_b00b0637ed4d4353826d1899391ffa02

Conclusion

This assessment identified several security weaknesses including exposed version control repositories, database misconfigurations, information disclosure through phpinfo(), and sensitive directories accessible from the web server.