



UML-E1-MohamedAli

Teil A

Use Case Diagram

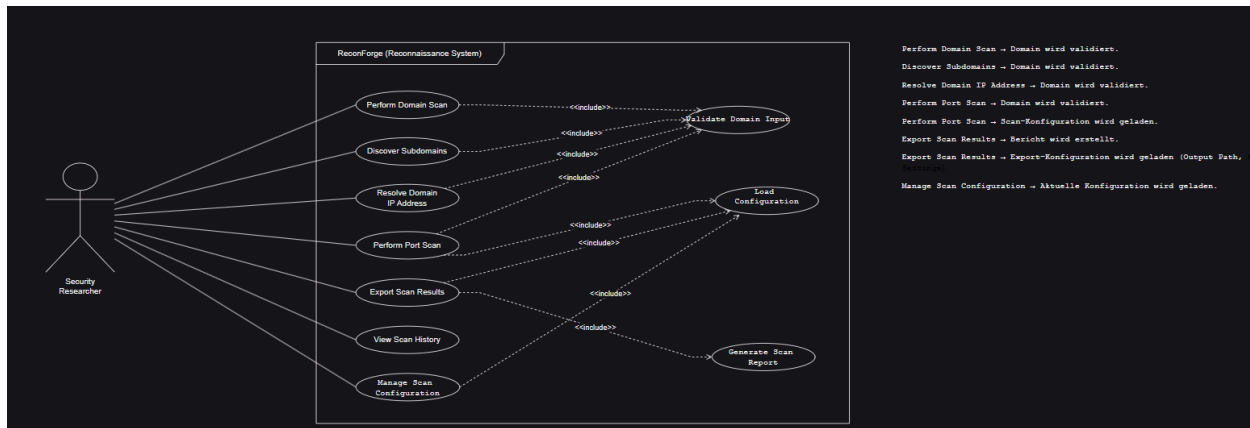


Class Diagram

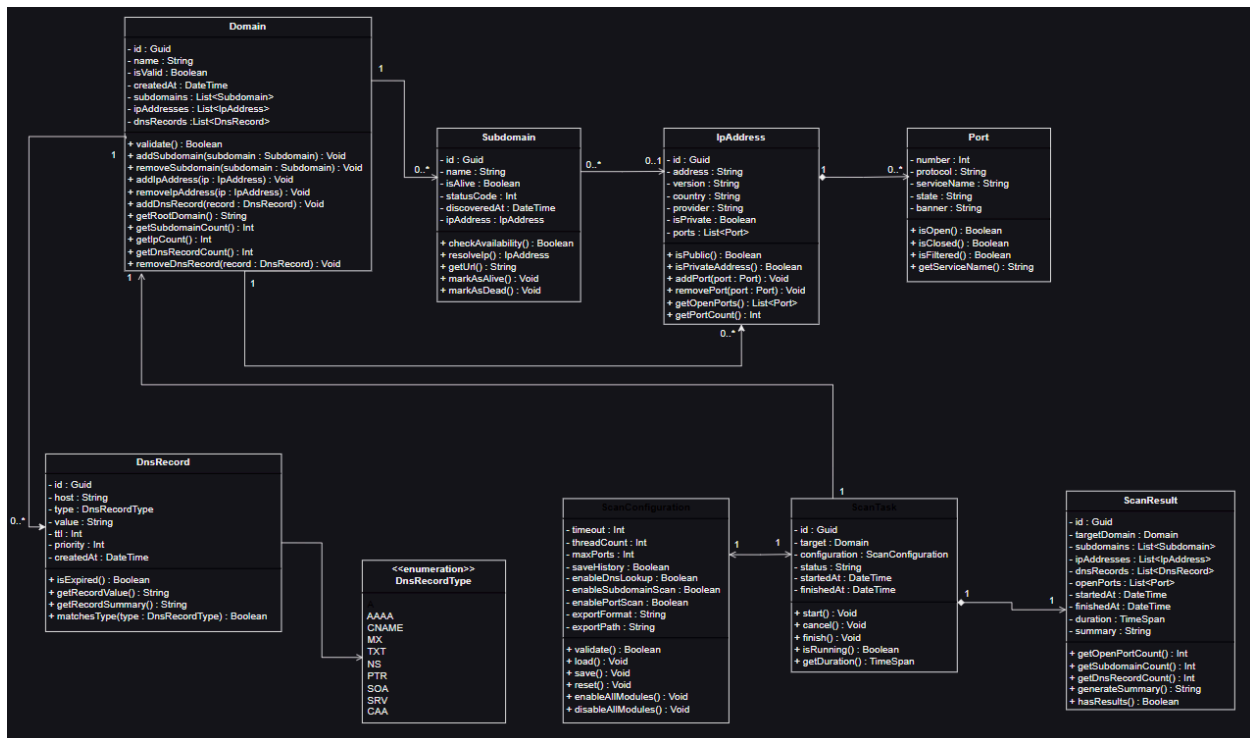


Activity Diagram


Diagram

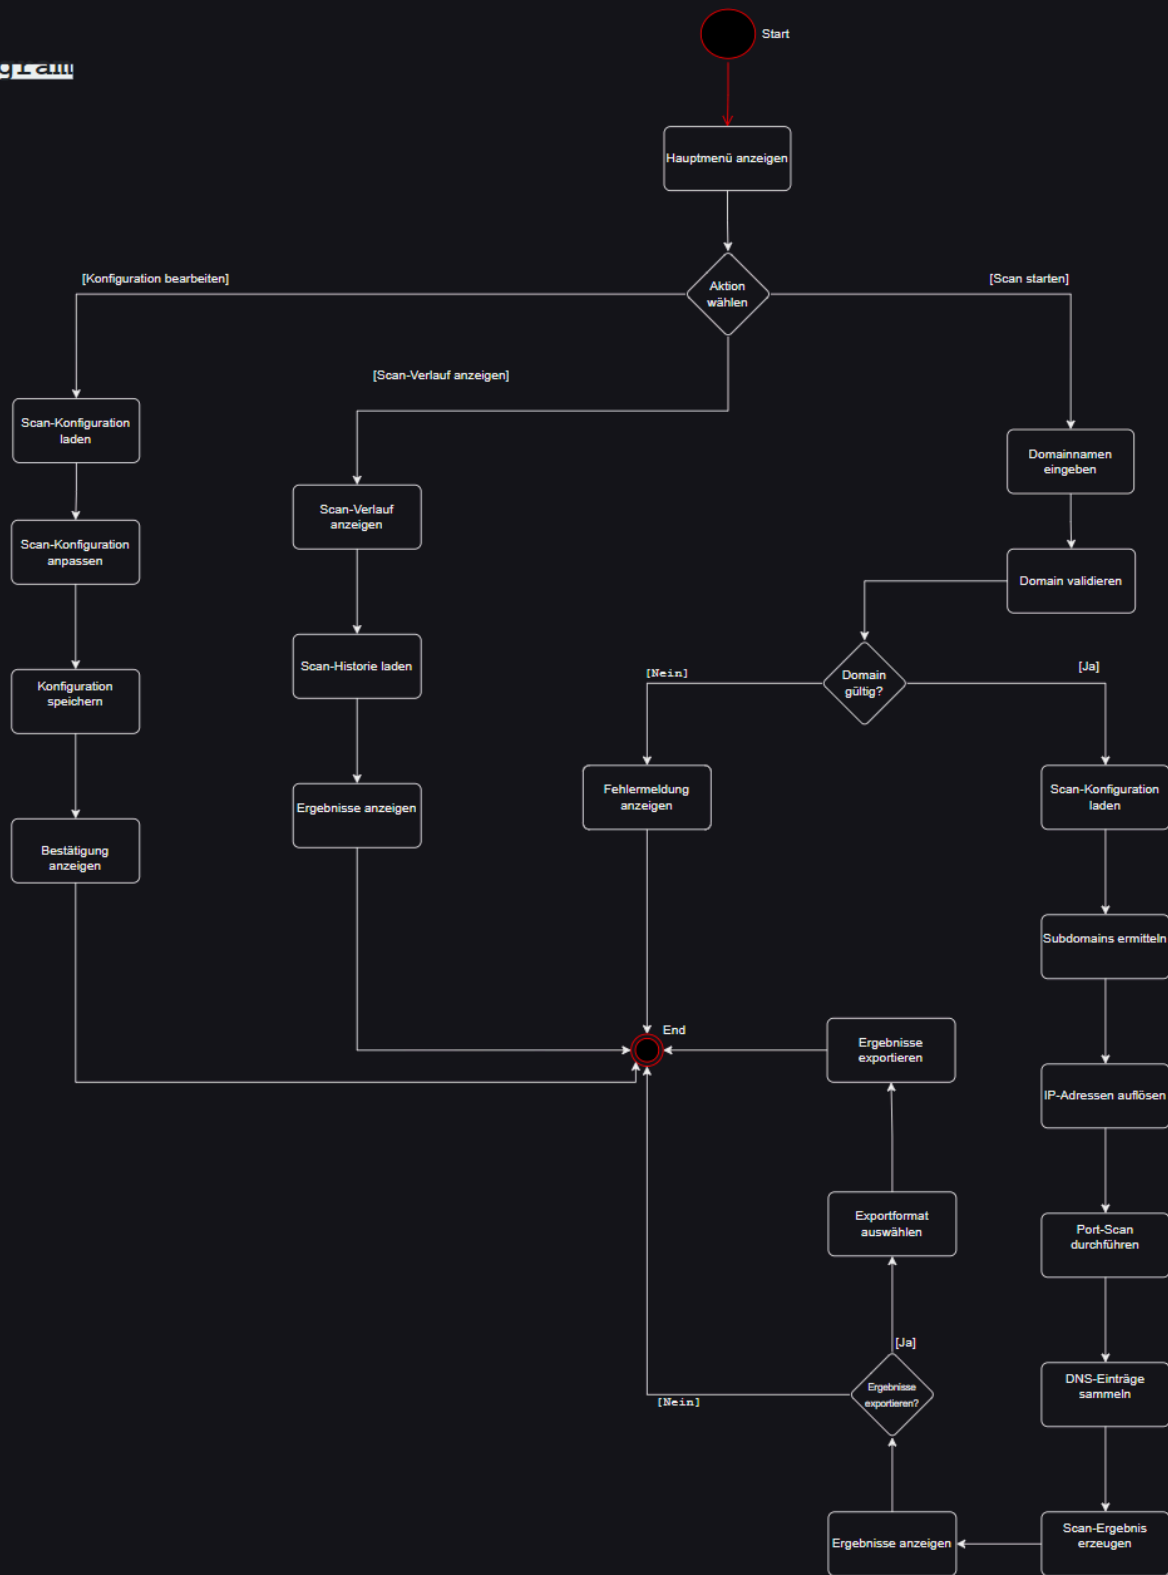

Sequence Diagram

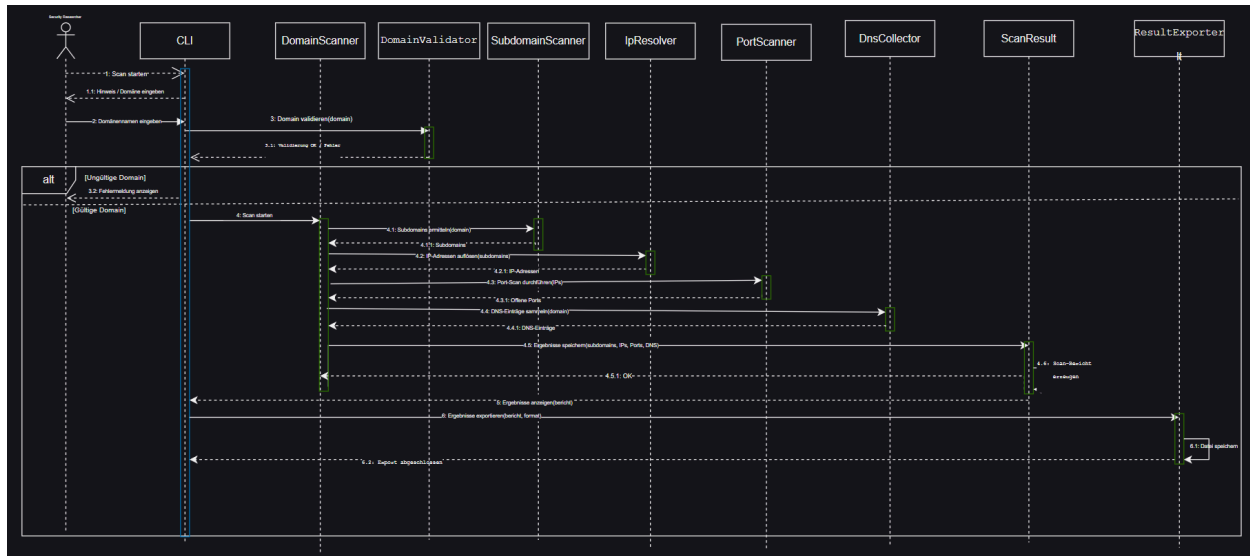

Component Diagram

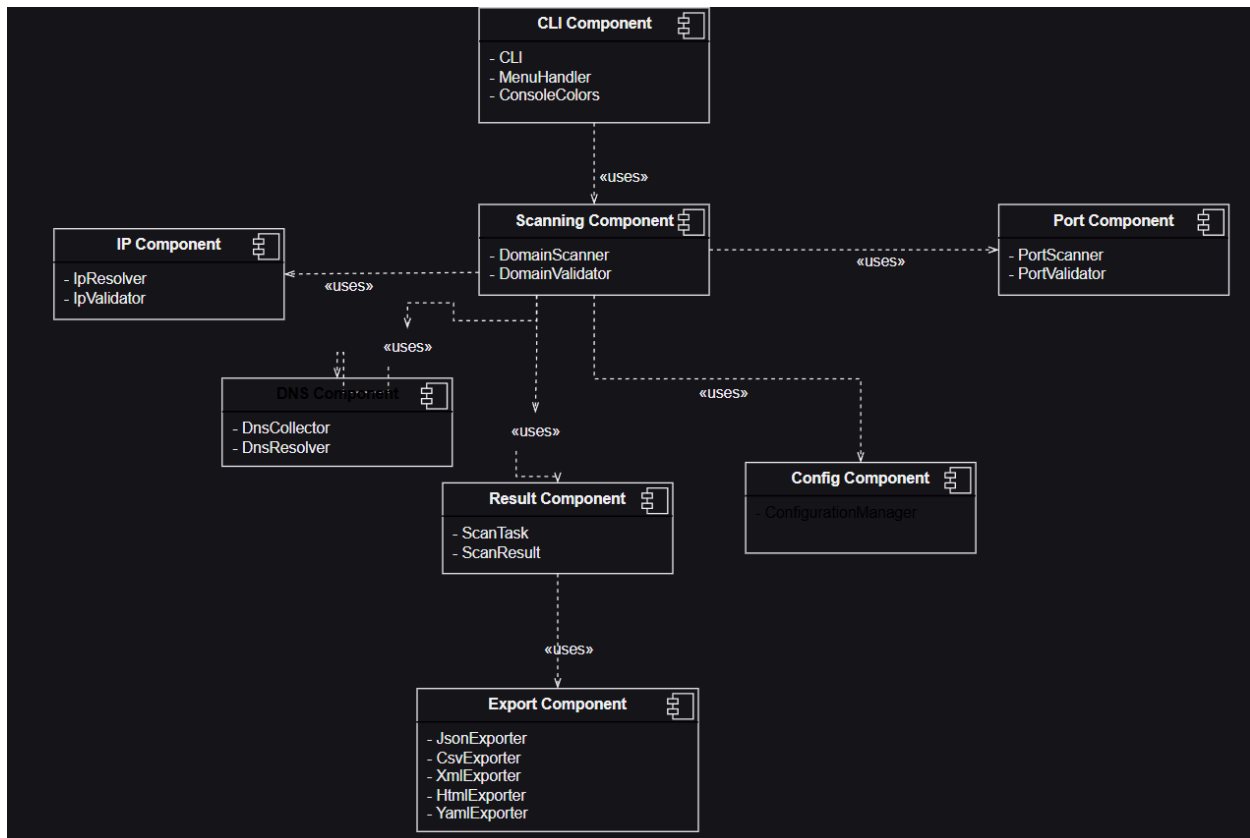

Teil B

```
classDiagram

class Domain{
+Guid id
+String name
+Boolean isValid
}


class Subdomain{
+Guid id
+String name
}


class IPAddress{
+Guid id
+String address
}

class Port{
+int number
+String protocol
}

class DnsRecord{
+Guid id
+String host
}

Domain "1" --> "0..*" Subdomain
Domain "1" --> "0..*" DnsRecord
Subdomain "0..*" --> "0..1" IPAddress
IPAddress "1" --> "0..*" Port
```

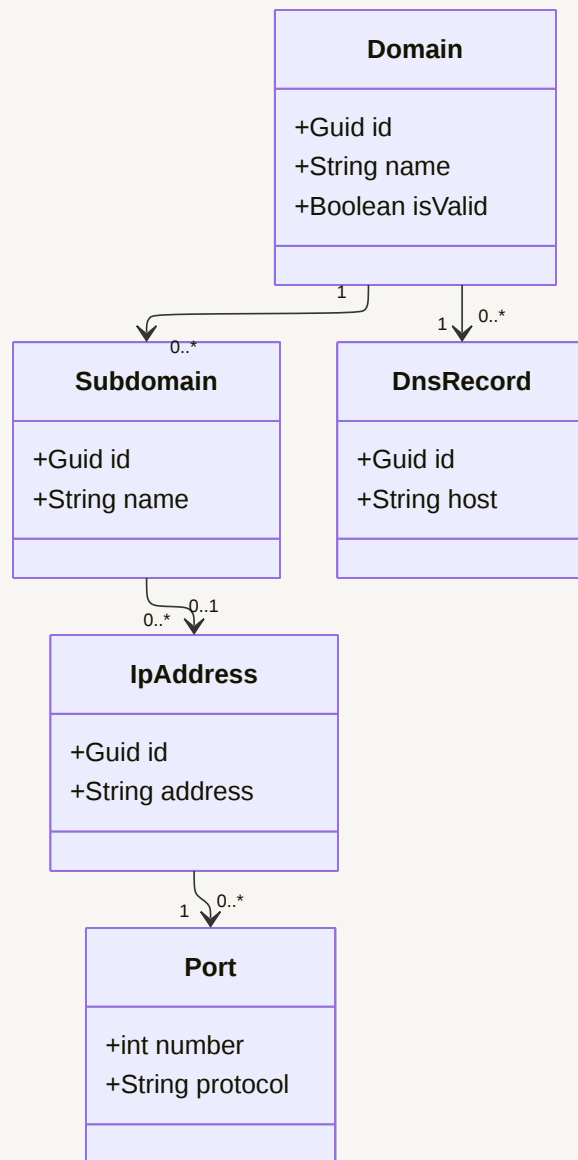

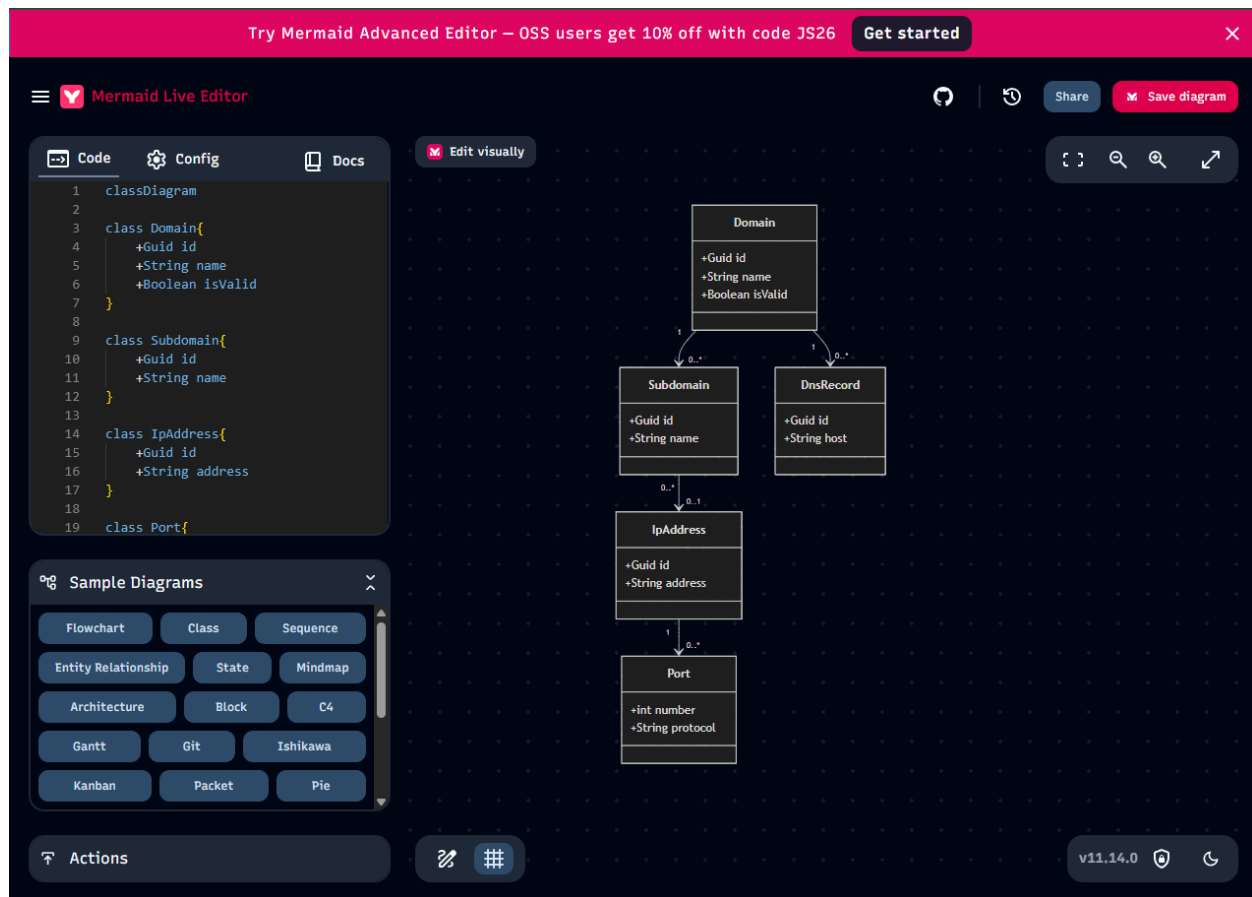

flowchart TD

A[Start] --> B[Hauptmenü anzeigen]

B --> C{Aktion wählen}

C -->|Scan starten| D[Domainnamen eingeben]

D --> E[Domain validieren]

E --> F{Domain gültig?}

F -->|Ja| G[Scan-Konfiguration laden]

G --> H[Subdomains ermitteln]

H --> I[IP-Adressen auflösen]

I --> J[Port-Scan durchführen]

J --> K[DNS-Einträge sammeln]

K --> L[Scan-Ergebnis erzeugen]

F -->|Nein| M[Fehlermeldung anzeigen]

