




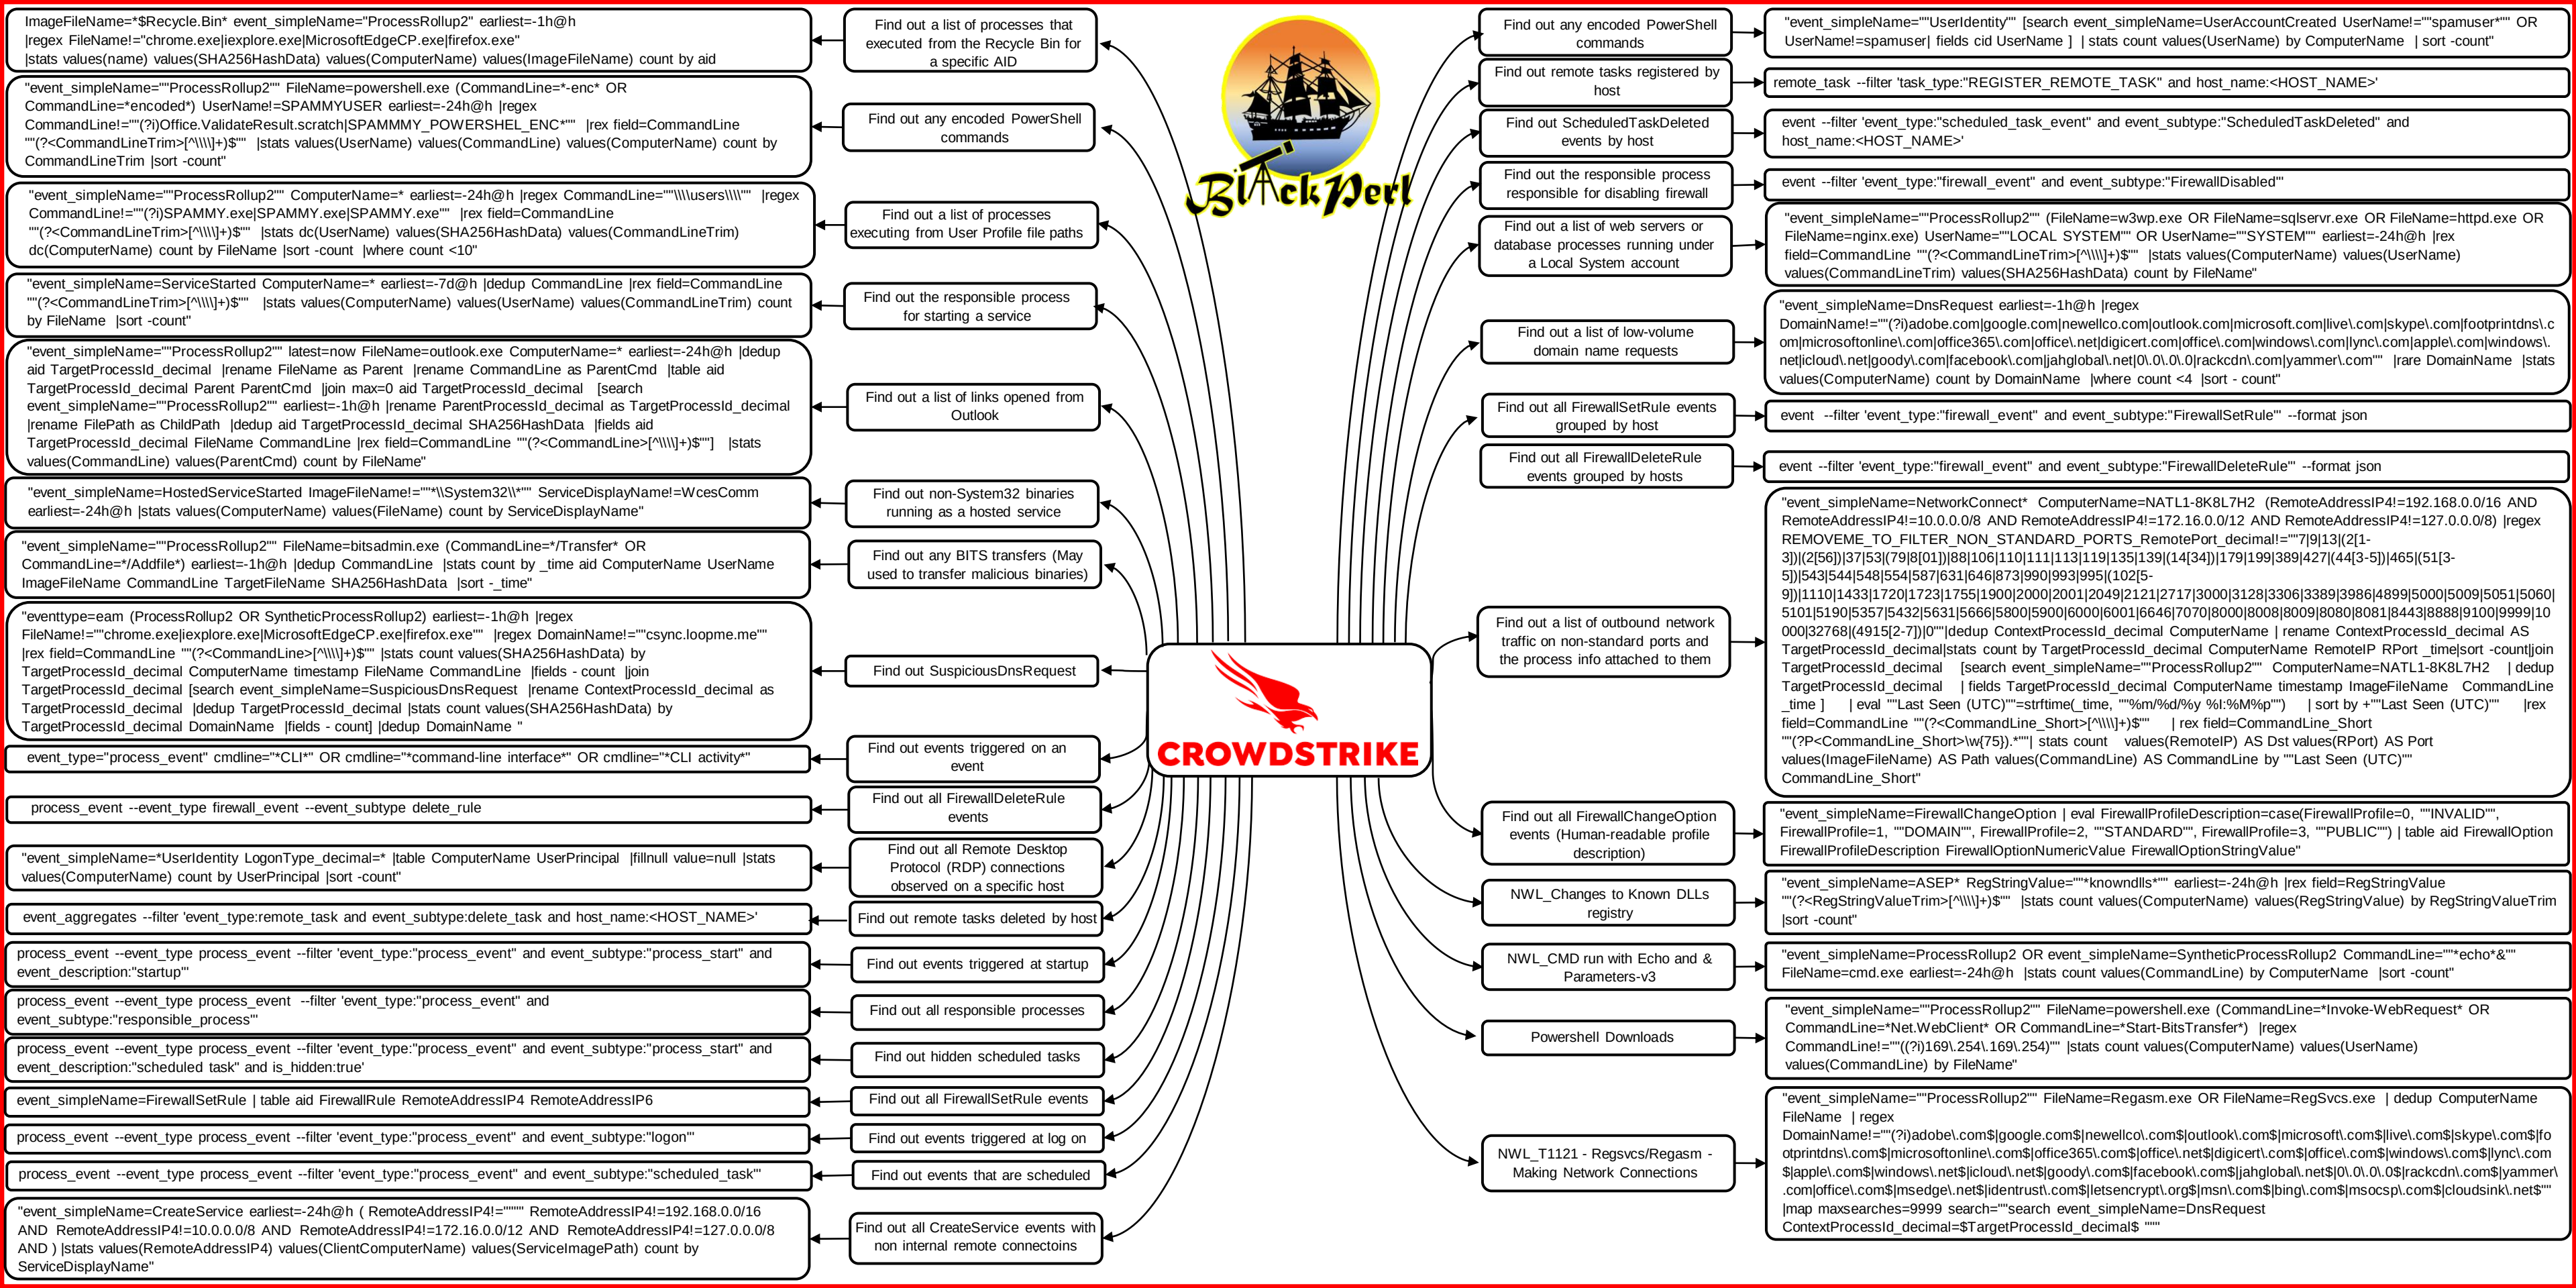

"event_simpleName=""ProcessRollup2"" earliest=-24h@h FileName=PsInfo.exe OR FileName=PsLoggedon.exe OR FileName=pssuspend.exe OR FileName=psfile.exe OR FileName=PsService.exe OR FileName=PsGetsid.exe OR FileName=pslist.exe OR FileName=pspasswd.exe OR FileName=pssutdown.exe OR FileName=psping.exe OR FileName=psloglist.exe |rex field=CommandLine ""(?<CommandLine>[^\|]+)\$"" |regex CommandLine!=""(?!Spammypath"" |stats count values(CommandLine) by ComputerName"

event_simpleName=ProcessRollup2 OR event_simpleName=SyntheticProcessRollup2 MD5HashData=86F8E249B90A767D28BE2D16EB702675 OR MD5HashData=a043fac94294b844bd4f05e3aec2c612 OR MD5HashData=f107a717f6f4910aef9cb4dc5290594 OR MD5HashData=84c82835a5d21bbcf75a61706d8ab549 OR MD5HashData=7f7ccaa16fb15eb1c7399d422f8363e8 OR MD5HashData=509c41ec97bb81b0567b059aa2f50fe8 OR MD5HashData=db349b97c37d22f5ea1d1841e3c89eb4 earliest=-24h@h

event_simpleName=ProcessRollup2 OR event_simpleName=SyntheticProcessRollup2 CommandLine=""wscript.exe*ProgramData"" earliest=-24h@h

"event_simpleName=ASEP* earliest=-24h@h |rex field=RegStringValue ""(?<RegStringValueTrim>[^\|]+)\$"" |stats dc(ComputerName) as count values(ComputerName) values(RegStringValue) by RegStringValueTrim |sort -count |where count < 10"

"sourcetype=PeVersionInfoV3-v02 CompanyName=*Sysinternals* earliest=-24h@h |eval OriginalFilename=lower(OriginalFilename) |stats values(ImageFileName) values(ComputerName) values(SHA256HashData) count by OriginalFilename"

"event_simpleName=ProcessRollup2 OR event_simpleName=SyntheticProcessRollup2 (FileName=net.exe OR FileName=net1.exe) AND CommandLine=""*admin*"" AND (CommandLine=""*localgroup*"" OR CommandLine=""*domain*") earliest=-24h@h |regex CommandLine!=""(?!Uninstall|aspect|S-1-5-32-544"" |stats count values(CommandLine) by ComputerName"

"eventtype=eam NetworkConnectIP4 RemoteAddressIP4!=127.0.0.0/8 RemoteAddressIP4!=222.222.222.0/22 RemoteAddressIP4!=222.222.222.0/23 RemoteAddressIP4!=10.0.0.0/8 RemoteAddressIP4!=172.16.0.0/12 RemoteAddressIP4!=192.168.0.0/16 RemotePort_decimal!=443 RemotePort_decimal!=80 |head 10000 |plocation RemoteAddressIP4 |search Country!=""United States"" |stats count values(Country) values(RemoteAddressIP4) values(RemotePort_decimal) by ComputerName |sort -count"

"event_simpleName=Asep* RegObjectName=*\\Run |regex TargetCommandLineParameters!=""(?!)"[^\|]+[a-z]|V[a-z]|Vu0000"" |regex RegValueName!=""(?!)"program files|Program Files|del|Logitech|sidebar|tomtom|Yandex"" |stats count values(RegStringValue) values(RegValueName) values(ComputerName) by TargetCommandLineParameters |sort -count"

source=PlatformEvents ComputerName=COMPUTERNAME

"event_simpleName=""NewExecutableRenamed"" SourceFileName!=""*.exe"" |regex CommandLine!=""(?!)"\.\partial"" |rename TargetFileName as ImageFileName |join ImageFileName [search event_simpleName=""ProcessRollup2""] |table ComputerName SourceFileName ImageFileName CommandLine"

"eventtype=eam (ProcessRollup2 OR SyntheticProcessRollup2) (FileName=Atbroker.exe OR FileName=Bash.exe OR FileName=Bitsadmin.exe OR FileName=Certutil.exe OR FileName=Cmd.exe OR FileName=Cmstp.exe OR FileName=Control.exe OR FileName=Cscript.exe OR FileName=Csc.exe OR FileName=Dfsvc.exe OR FileName=Diskshadow.exe OR FileName=Dnscmd.exe OR FileName=Esentutl.exe OR FileName=Eventvwr.exe OR FileName=Expand.exe OR FileName=Extexport.exe OR FileName=Extrac32.exe OR FileName=Findstr.exe OR FileName=Forfiles.exe OR FileName=Ftp.exe OR FileName=Gpscript.exe OR FileName=Hh.exe OR FileName=Ie4uinit.exe OR FileName=Ieexec.exe OR FileName=Infdefaultinstall.exe OR FileName=Installutil.exe OR FileName=Jsc.exe OR FileName=Makecab.exe OR FileName=Mavinject.exe OR FileName=Mmc.exe OR FileName=Mscconfig.exe OR FileName=Msdtd.exe OR FileName=Mshta.exe OR FileName=Msieexec.exe OR FileName=Odbccconf.exe OR FileName=Pcalua.exe OR FileName=Pcwrn.exe OR FileName=Presentationhost.exe OR FileName=Print.exe OR FileName=Regasm.exe OR FileName=Regedit.exe OR FileName=Register-cimprovider.exe OR FileName=Regsvcs.exe OR FileName=Regsvr32.exe OR FileName=Reg.exe OR FileName=Replace.exe OR FileName=Rcping.exe OR FileName=Rundll32.exe OR FileName=Runonce.exe OR FileName=Runscripthelper.exe OR FileName=Schtasks.exe OR FileName=Scriptrunner.exe OR FileName=Sc.exe OR FileName=SyncAppvPublishingServer.exe OR FileName=Verclsid.exe OR FileName=Wab.exe OR FileName=Wmic.exe OR FileName=Wscript.exe OR FileName=Wsreset.exe OR FileName=Xwizard.exe) |regex CommandLine!=""(?!)"Microsoft Monitoring Agent"" |stats values(CommandLine) count by ComputerName |sort -count"

NWL_Potential Post Exploit

NWL_WannaCry

NWL_Wscript Runs Obfuscated JS

NWL_CMD or PS Invoke-Expression with Env Variable

Find out Suspicious Registry Changes

SysInternals Use

NWL_Administrator Enumeration

Find out Off Shore Non Standard Ports

Regkey stuff

Review all events for ComputerName

Execution of Renamed Executables

LOLBAS (add to ID:86 or 87)

Suspicious PowerShell Process, Spawned from Explorer, with Network Connections

Find out processes and connected domain names

Find out and resolve IOAs/NAMES in Monitor mode.

Find out hits for custom IOAs in Monitor status

Find out HTA files

MAC: Chmod commands run on hidden user dirs 2

"event_simpleName=""DnsRequest"" |rename ContextProcessId as TargetProcessId |join TargetProcessId [search event_simpleName=""ProcessRollup2"" AND FileName=""explorer.exe"" |dedup CommandLine |rename TargetProcessId_decimal as ParentProcessId_decimal |join ParentProcessId_decimal [search event_simpleName=""ProcessRollup2"" FileName=""powershell.exe"" |dedup CommandLine]] |table ComputerName timestamp ImageFileName DomainName CommandLine"

"ComputerName=""EHTT1-DHD2NH2"" event_simpleName=""DnsRequest"" DomainName=""*.*"" |regex DomainName!=""(?!)"adobe\.com\$|google\.com\$|newellco\.com\$|outlook\.com\$|microsoft\.com\$|live\.com\$|skype\.com\$|fo otprintdns\.com\$|microsoftonline\.com\$|office365\.com\$|office\.net\$|digicert\.com\$|office\.com\$|windows\.com\$|lync\.com \$|apple\.com\$|windows\.net\$|icloud\.net\$|goody\.com\$|facebook\.com\$|jahgloball\.net\$|0\.0\.0\.0\$|rackcdn\.com\$|yammer\ .com\$|office\.com\$|msedge\.net\$|identrust\.com\$|letsencrypt\.org\$|msn\.com\$|bing\.com\$|msocsp\.com\$|cloudsink\.net\$|\. ocalmachine"" |rename ContextProcessId_decimal as TargetProcessId_decimal |join TargetProcessId_decimal [search ComputerName=""EHTT1-DHD2NH2"" event_simpleName=""ProcessRollup2"" earliest=-24h@h |regex CommandLine!=""(?!)"explore\.exe|chrome\.exe|MicrosoftEdgeCP\.exe|firefox\.exe|google|smartscreen\.exe|OneDrive\.ex e|SearchUI\.exe|mimicast\.com|MicrosoftEdge\.exe"" |rex field=CommandLine ""(?<CommandLine>[^\|]+)\$"" | eval ""Last Seen (UTC)""=strftime(_time, ""%m/%d/%y %l:%M:%p"") |stats sparkline count values(CommandLine) values(DomainName) dc(""Last Seen (UTC)"") by FileName SHA256HashData"

"event_simpleName=CustomIOABasicProcessDetectionInfoEvent OR event_simpleName=CustomLOADDomainNameDetectionInfoEvent OR event_simpleName=CustomIOAFileWrittenDetectionInfoEvent OR event_simpleName=CustomIOANetworkConnectionDetectionInfoEvent AND CommandLine!=*updates* |rex field=CommandLine ""(?<CommandLine_Short>[^\|]+)\$"" |rex field=CommandLine_Short ""(?P<CommandLine_Short>\w{75}).*"" |rex field=GrandparentCommandLine ""(?<GrandparentCommandLine_Short>[^\|]+)\$"" |rex field=GrandparentCommandLine_Short ""(?P<GrandparentCommandLine_Short>\w{75}).*"" |rex field=ParentCommandLine ""(?<ParentCommandLine_Short>[^\|]+)\$"" |rex field=ParentCommandLine_Short ""(?P<ParentCommandLine_Short>\w{75}).*"" | eval ""IOA Rule Name""=case(TemplateInstanceDecimal=""25"" ""15,25,at.exe"" TemplateInstanceDecimal=""29"" ""24,29,bitsadmin .exe"" TemplateInstanceDecimal=""30"" ""32,30,certutil.exe"" TemplateInstanceDecimal=""27"" ""29,27,calc.exe"" Te mplatelInstanceDecimal=""34"" ""0,34,Torrents"" TemplateInstanceDecimal=""31"" ""0,31,WebNavigator_Network_D omain"" TemplateInstanceDecimal=""32"" ""0,32,WebNavigator_File"" TemplateInstanceDecimal=""36"" ""44,36,cmd .exe"" TemplateInstanceDecimal=""38"" ""0,38,Tor"" TemplateInstanceDecimal=""39"" ""0,39,VPN"") |fillnull value=null customIOAname |eval ""Time EST""=strftime(_time-14400, ""%m/%d/%y %l:%M:%S %p"") | stats count earliest(""Time EST"") values(CommandLine) values(CommandLine_Short) values(GrandparentCommandLine) values(ParentCommandLine) by ""Time EST"" ComputerName TemplateInstanceDecimal ""IOA Rule Name"" |sort - ""Time EST""

"event_simpleName=CustomIOABasicProcessDetectionInfoEvent OR event_simpleName=CustomLOADDomainNameDetectionInfoEvent OR event_simpleName=CustomIOAFileWrittenDetectionInfoEvent OR event_simpleName=CustomIOANetworkConnectionDetectionInfoEvent AND CommandLine!=*updates* |rex field=CommandLine ""(?<CommandLine_Short>[^\|]+)\$"" |rex field=CommandLine_Short ""(?P<CommandLine_Short>\w{75}).*"" |rex field=GrandparentCommandLine ""(?<GrandparentCommandLine_Short>[^\|]+)\$"" |rex field=GrandparentCommandLine_Short ""(?P<GrandparentCommandLine_Short>\w{75}).*"" |rex field=ParentCommandLine ""(?<ParentCommandLine_Short>[^\|]+)\$"" |rex field=ParentCommandLine_Short ""(?P<ParentCommandLine_Short>\w{75}).*"" | eval ""IOA Rule Name""=case(TemplateInstanceDecimal=""26"" ""58,26,csc.exe"" TemplateInstanceDecimal=""25"" ""15,25,at.exe"" TemplateInstanceDecimal=""29"" ""24,29,bitsadmin.exe"" TemplateInstanceDecimal=""29"" ""24,29,bitsadmin.exe"" TemplateInstanceDecimal=""30"" ""32,30,certutil.exe"" TemplateInstanceDecimal=""30"" ""32,30,certutil.exe"" TemplatelInstanceDecimal=""27"" ""29,27,calc.exe"" TemplateInstanceDecimal=""34"" ""0,34,Torrents"" TemplateInstancel d_decimal=""31"" ""0,31,WebNavigator_Network_Domain"" TemplateInstanceDecimal=""32"" ""0,32,WebNavigator_Fil e"") |fillnull value=null customIOAname |eval ""Last Seen (UTC)""=strftime(_time, ""%m/%d/%y %l:%M:%p"") | stats count earliest(Last Seen (UTC)) values(CommandLine_Short) values(GrandparentCommandLine) values(ParentCommandLine) by ComputerName TemplateInstanceDecimal ""IOA Rule Name""

"event_simpleName=ProcessRollup2 ImageFileName=""*mshta.exe"" | table ComputerName,UserName,FileName,CommandLine,SHA256HashData |regex CommandLine!=""(?!)"TeamViewer|officejet|deskjet|Assistant|solidworks|ChangeProxySettings"" |rex field=CommandLine ""\\\\(?<HTA_filename>[^\|]*\.hta)""

"event_simpleName=*ProcessRollup2 event_platform=Mac chmod NOT <redacted> NOT <redacted> |regex CommandLine=""/Users/[a-z]+/.*. "" |table CommandLine"



"event_simpleName=""ProcessRollup2"" FileName=PsExec.exe OR FileName=SysRun.exe OR FileName=wce.exe OR FileName=wce32.exe OR FileName=whosthere-alt.exe OR FileName=whosthere.exe OR FileName=genhash.exe OR FileName=iam-alt.exe OR FileName=iam.exe OR FileName=crackmapexec.exe OR FileName=hashcat64.exe OR FileName=AccessChk.exe OR FileName=Autologon.exe OR FileName=Streams.exe OR FileName=getlsasrvaddr.exe OR FileName=SharpExec_x64.exe OR FileName=SharpExec_x86.exe |regex CommandLine!=""(?)Spammy_strings1|Spammy_strings2|Spammy_strings3|Spammy_strings4"" |stats count values(CommandLine) by ComputerName |sort -count"

NWL_Potential Post Exploit Tools Elevated

"event_simpleName=NetworkConnect* (LocalPort_decimal=3389 OR LocalPort_decimal=5900) (RemoteAddressIP4!=192.168.0.0/16 AND RemoteAddressIP4!=10.0.0.0/8 AND RemoteAddressIP4!=172.16.0.0/12 AND RemoteAddressIP4!=127.0.0.0/8) |rename aip as EXT_DEST_IP , LocalPort_decimal as EXT_DEST_PORT , LocalAddressIP4 as DEST_NAT_IP,RemotePort_decimal as DEST_NAT_PORT, RemoteAddressIP4 as SRC_EXT_IP |table EXT_DEST_IP EXT_DEST_PORT DEST_NAT_IP DEST_NAT_PORT SRC_EXT_IP ComputerName"

RDP inbound Splunk information

"ComputerName=COMPUTERNAMEHERE event_simpleName=AssociateIndicator |dedup TargetProcessId_decimal |map search=""search event_simpleName=""ProcessRollup2"" TargetProcessId_decimal=\$TargetProcessId_decimal\$ aid=\$aid\$\$\$ |join aid [search ComputerName=dc2pwnpvn001 event_simpleName=AssociateIndicator |dedup TargetProcessId_decimal] |table ComputerName DetectScenario DetectName tactic technique DetectDescription CommandLine |dedup ComputerName DetectScenario DetectName tactic technique DetectDescription CommandLine"

Tactic Technique and CommandLine based on Computer Name

"(ComputerName=COMPUTERNAMEHERE sourcetype=UserIdentityV2-v02 OR sourcetype=UserLogonV8-v02 UserPrincipal!=""spammyemail@company.com"" UserPrincipal=*.@*.com UserPrincipal!=*.\$*.com UserName!=svcSCCM.ClientPush UserName!=SYSTEM earliest=-7d@d) |lookup aid_master aid OUTPUT City Country ComputerName MachineDomain |rex field=UserPrincipal ""^(?<First>w+).(?(<Last>w+)(@.)*)" |eval ""Full Name""= First"" ""Last |eval ""Country City"" = Country."" ""City |join ComputerName [search source=PlatformEvents DetectDescription=""*"" |table ComputerName DetectDescription] |table DetectDescription ComputerName LocalAddressIP4 MachineDomain UserName ""Full Name"" UserPrincipal ""Country City"" |fillnull value=NULL |dedup UserPrincipal DetectDescription ComputerName"

Information about Aid and/or UserName>userinfo for ticket

"|savedsearch windows_patch_status cid=""*"" kb_pattern="""(KB4499178)|(KB4499175)|(KB4499164)|(KB4503277)|(KB4503292)|(KB4507449)|(KB4507437)|(KB4512506)|(KB4512514)|(KB4516065)|(KB4516048)|(KB4524157)|(KB4519976)|(KB4525251)|(KB4525235);"" |rename PatchStatus as BlueKeepStatus |lookup aid_master.csv aid OUTPUT ComputerName, Version, Time, SiteName, MachineDomain |search Version=""Windows Server 2008 R2"" OR Version=""Windows 7"" |search Version=""*"" BlueKeepStatus=""Vulnerable (Patched; Reboot Required)"" OR BlueKeepStatus=""Vulnerable (Not patched)"" |lookup managedassets.csv aid OUTPUT MAC, LocalAddressIP4 |lookup cid_name.csv cid OUTPUT name as ""Company"" |table ComputerName, Version, BlueKeepStatus, LastPatchTime, Time, MAC, LocalAddressIP4, SiteName, MachineDomain, Company `formatDate(LastPatchTime)` `formatDate(Time)` |rename ComputerName as ""Host Name"" , Version as ""OS Version"" , BlueKeepStatus as ""Vulnerable Status"" , LastPatchTime as ""Last Update Installed Time"" , Time as ""Last Sensor Report Time"" , SiteName as ""Site Name"" , MachineDomain as ""Domain"" , Company as ""Company Name""

Information windows_patch_status (BlueKeepStatus)

"event_platform=Mac event_simpleName=ProcessRollup2 aid=<aid> (networksetup OR who OR whoami OR sysctl) |eval JoinId=ParentProcessId_decimal |rename CommandLine as ChildCommandLine |join type=outer aid,JoinId [search event_platform=Mac aid=<aid> event_simpleName=ProcessRollup2 |eval JoinId=TargetProcessId_decimal |rename CommandLine as ParentCommandLine] |search NOT ChildCommandLine=<redacted> |search NOT ParentCommandLine=<redacted> |stats values(ChildCommandLine) as Commands, count by aid |search count>1"

MAC: Unusual number of recon commands for the environment for 1 host

"event_platform=Mac event_simpleName=ProcessRollup2 (CommandLine=""*/tmp/*"" OR CommandLine=""*/private/tmp/*"") NOT <redacted> NOT <redacted> NOT <redacted>"

MAC: Processes running from tmp dirs

"event_platform=Mac aid=<aid> event_simpleName=ProcessRollup2 (sh OR launchctl) |transaction aid,ProcessGroupId_decimal |search sh launchctl"

MAC: Process tree that contains both sh and launchctl

"event_platform=Mac event_simpleName=*ProcessRollup2 CommandLine=*LaunchAgents* |dedup aid,CommandLine |makemv CommandLine delim="" "" |eval CommandLine=mfilter(match(CommandLine, ""*.LaunchAgents.*"")) |eval CommandLine=replace(CommandLine, ""/Users/[a-z]+/*"" , ""/*"") |eval CommandLine=replace(CommandLine, ""/*\$"" , ""/*"") |dedup aid,CommandLine |stats count by CommandLine |sort count"

MAC: Rare launch agents: list and count launch agents

"event_simpleName=*ProcessRollup2 event_platform=Mac chown NOT <redacted> |regex CommandLine=""*/Users/[a-z]+/\\..*""

MAC: Chown commands run on hidden user dirs

"event_platform=Mac event_simpleName=ProcessRollup2 CommandLine=""*xattr -d -r com.apple.quarantine*"" NOT <redacted> NOT <redacted>"

MAC: Removing the quarantine attribute

MAC: Was a process orphaned?

"aid=<aid> <process_id> event_simpleName=ProcessRollup2 |eval JoinId=ParentProcessId_decimal |rename CommandLine as ChildCommandLine |join type=outer JoinId [search aid=<aid> event_simpleName=ProcessRollup2 |eval JoinId=TargetProcessId_decimal |rename CommandLine as ParentCommandLine] |eval ParentCommandLine=coalesce(ParentCommandLine, ""IamAnOrphan"")"

MAC: Rare processes associated with security_authtrampoline Why isn't the first query enough?

"event_platform=Mac event_simpleName=*ProcessRollup2 [search event_platform=Mac event_simpleName=*ProcessRollup2 security_authtrampoline |fields ProcessGroupId_decimal] |dedup aid, SHA256HashData |eval CommandLine=substr(CommandLine,1,100) |stats values(CommandLine) as Commands, dc(aid) as AuthtrampolineCount by SHA256HashData [search AuthtrampolineCount=1 |join type=outer SHA256HashData [search event_platform=Mac event_simpleName=*ProcessRollup2 |rare SHA256HashData limit=10000 by aid |stats dc(aid) as RareGPopCount by SHA256HashData] |join type=outer SHA256HashData [search event_platform=Mac event_simpleName=*ProcessRollup2 |top SHA256HashData limit=10000 by aid |stats dc(aid) as CommonGPopCount by SHA256HashData] |fillnull value=0 CommonGPopCount |fillnull value=0 RareGPopCount |search CommonGPopCount<2 RareGPopCount<2 |eval Auth_Common_Rare=AuthtrampolineCount."" ""CommonGPopCount."" ""RareGPopCount |fields SHA256HashData, Commands, Auth_Common_Rare |search NOT <redacted> NOT <redacted>"

MAC: Investigating a Word macro

"aid=<aid> event_simpleName=""ProcessRollup2"" NOT CommandLine=""*/Applications/*Microsoft Word*"" [search aid=<aid> CommandLine=""*/Applications/*Microsoft Word*"" event_simpleName=""ProcessRollup2"" |rename TargetProcessId_decimal as ProcessGroupId_decimal |return 10000 ProcessGroupId_decimal]"

MAC: Processes running from /Library/Scripts

event_platform=Mac CommandLine="/Library/Scripts/*"

MAC: Rare processes associated with security_authtrampoline

"event_platform=Mac event_simpleName=*ProcessRollup2 [search event_platform=Mac event_simpleName=*ProcessRollup2 security_authtrampoline |fields ProcessGroupId_decimal] |dedup aid, SHA256HashData |eval CommandLine=substr(CommandLine,1,100) |stats values(CommandLine) as Commands, dc(aid) as AuthtrampolineCount by SHA256HashData |eventstats sum(AuthtrampolineCount) as AuthtrampolineTotal |eval AuthTrampolinePerc=round((AuthtrampolineCount/AuthtrampolineTotal)*100,7) |join type=outer SHA256HashData [search event_platform=Mac event_simpleName=*ProcessRollup2 |rare SHA256HashData limit=10000 by aid |stats dc(aid) as RareGPopCount by SHA256HashData |eventstats sum(RareGPopCount) as RareGPopTotal |eval RareGPopPerc=round((RareGPopCount/RareGPopTotal)*100,7)] |join type=outer SHA256HashData [search event_platform=Mac event_simpleName=*ProcessRollup2 |top SHA256HashData limit=10000 by aid |stats dc(aid) as CommonGPopCount by SHA256HashData |eventstats sum(CommonGPopCount) as CommonGPopTotal |eval CommonGPopPerc=round((CommonGPopCount/CommonGPopTotal)*100,7)] |fillnull value=0 CommonGPopCount |fillnull value=0 RareGPopCount"

MAC: Copies from tmp dirs to Users

"event_platform=Mac event_simpleName=ProcessRollup2 FileName=cp CommandLine=""*tmp*Users*""

MAC: Very busy process trees

"event_platform=Mac event_simpleName=ProcessRollup2 |stats count by ProcessGroupId_decimal,aid |search count>50 |map search=""search aid=\$aid\$ ProcessGroupId_decimal=\$ProcessGroupId_decimal\$ TargetProcessId_decimal=\$ProcessGroupId_decimal\$\$\$ |search NOT CommandLine=<redacted> NOT CommandLine=<redacted>"

MAC: Detecting Word Macros


"event_platform=Mac event_simpleName=""ProcessRollup2"" [search event_simpleName=*ProcessRollup2 event_platform=Mac CommandLine=""*/Applications/*Microsoft Word*"" |fields ProcessGroupId_decimal] |stats values(CommandLine) as Commands, count by aid,ProcessGroupId_decimal |search Commands=""*/Applications/*Microsoft Word*""


MAC: Long running processes with few network connections (i.e. stealthy C2)

"event_platform=Mac event_simpleName=ProcessRollup2 aid=<aid> |join type=outer TargetProcessId_decimal [search event_platform=Mac aid=<aid> event_simpleName=EndOfProcess |rename _time as EndTime |fields aid,TargetProcessId_decimal, EndTime] |eval duration=if(isnull(EndTime),now()- _time,EndTime-_time) |join type=outer aid,ProcessGroupId_decimal [search event_platform=Mac event_simpleName=NetworkConnect* aid=<aid> |stats count as NetworkConnectionCount by aid, ContextProcessId_decimal |rename ContextProcessId_decimal as ProcessGroupId_decimal] |search duration>86399 NetworkConnectionCount<5"

MAC: Rare self-deleting processes

"event_platform=Mac event_simpleName=ProcessSelfDeleted |map search=""search event_simpleName=*ProcessRollup2 aid=\$aid\$ TargetProcessId_decimal=\$ContextProcessId_decimal\$\$\$ |dedup aid,SHA256HashData |eval CommandLine=substr(CommandLine,1,50) |stats values(CommandLine) as Commands, dc(aid) as UniqueAgentCount by SHA256HashData |join type=outer SHA256HashData [search event_platform=Mac event_simpleName=*ProcessRollup2 |top SHA256HashData limit=10000 by aid |stats dc(aid) as CommonGPopCount by SHA256HashData] |join type=outer SHA256HashData [search event_platform=Mac event_simpleName=*ProcessRollup2 |rare SHA256HashData limit=10000 by aid |stats dc(aid) as RareGPopCount by SHA256HashData] |fillnull value=0 CommonGPopCount |fillnull value=0 RareGPopCount |search UniqueAgentCount=1 CommonGPopCount<2 RareGPopCount<2"

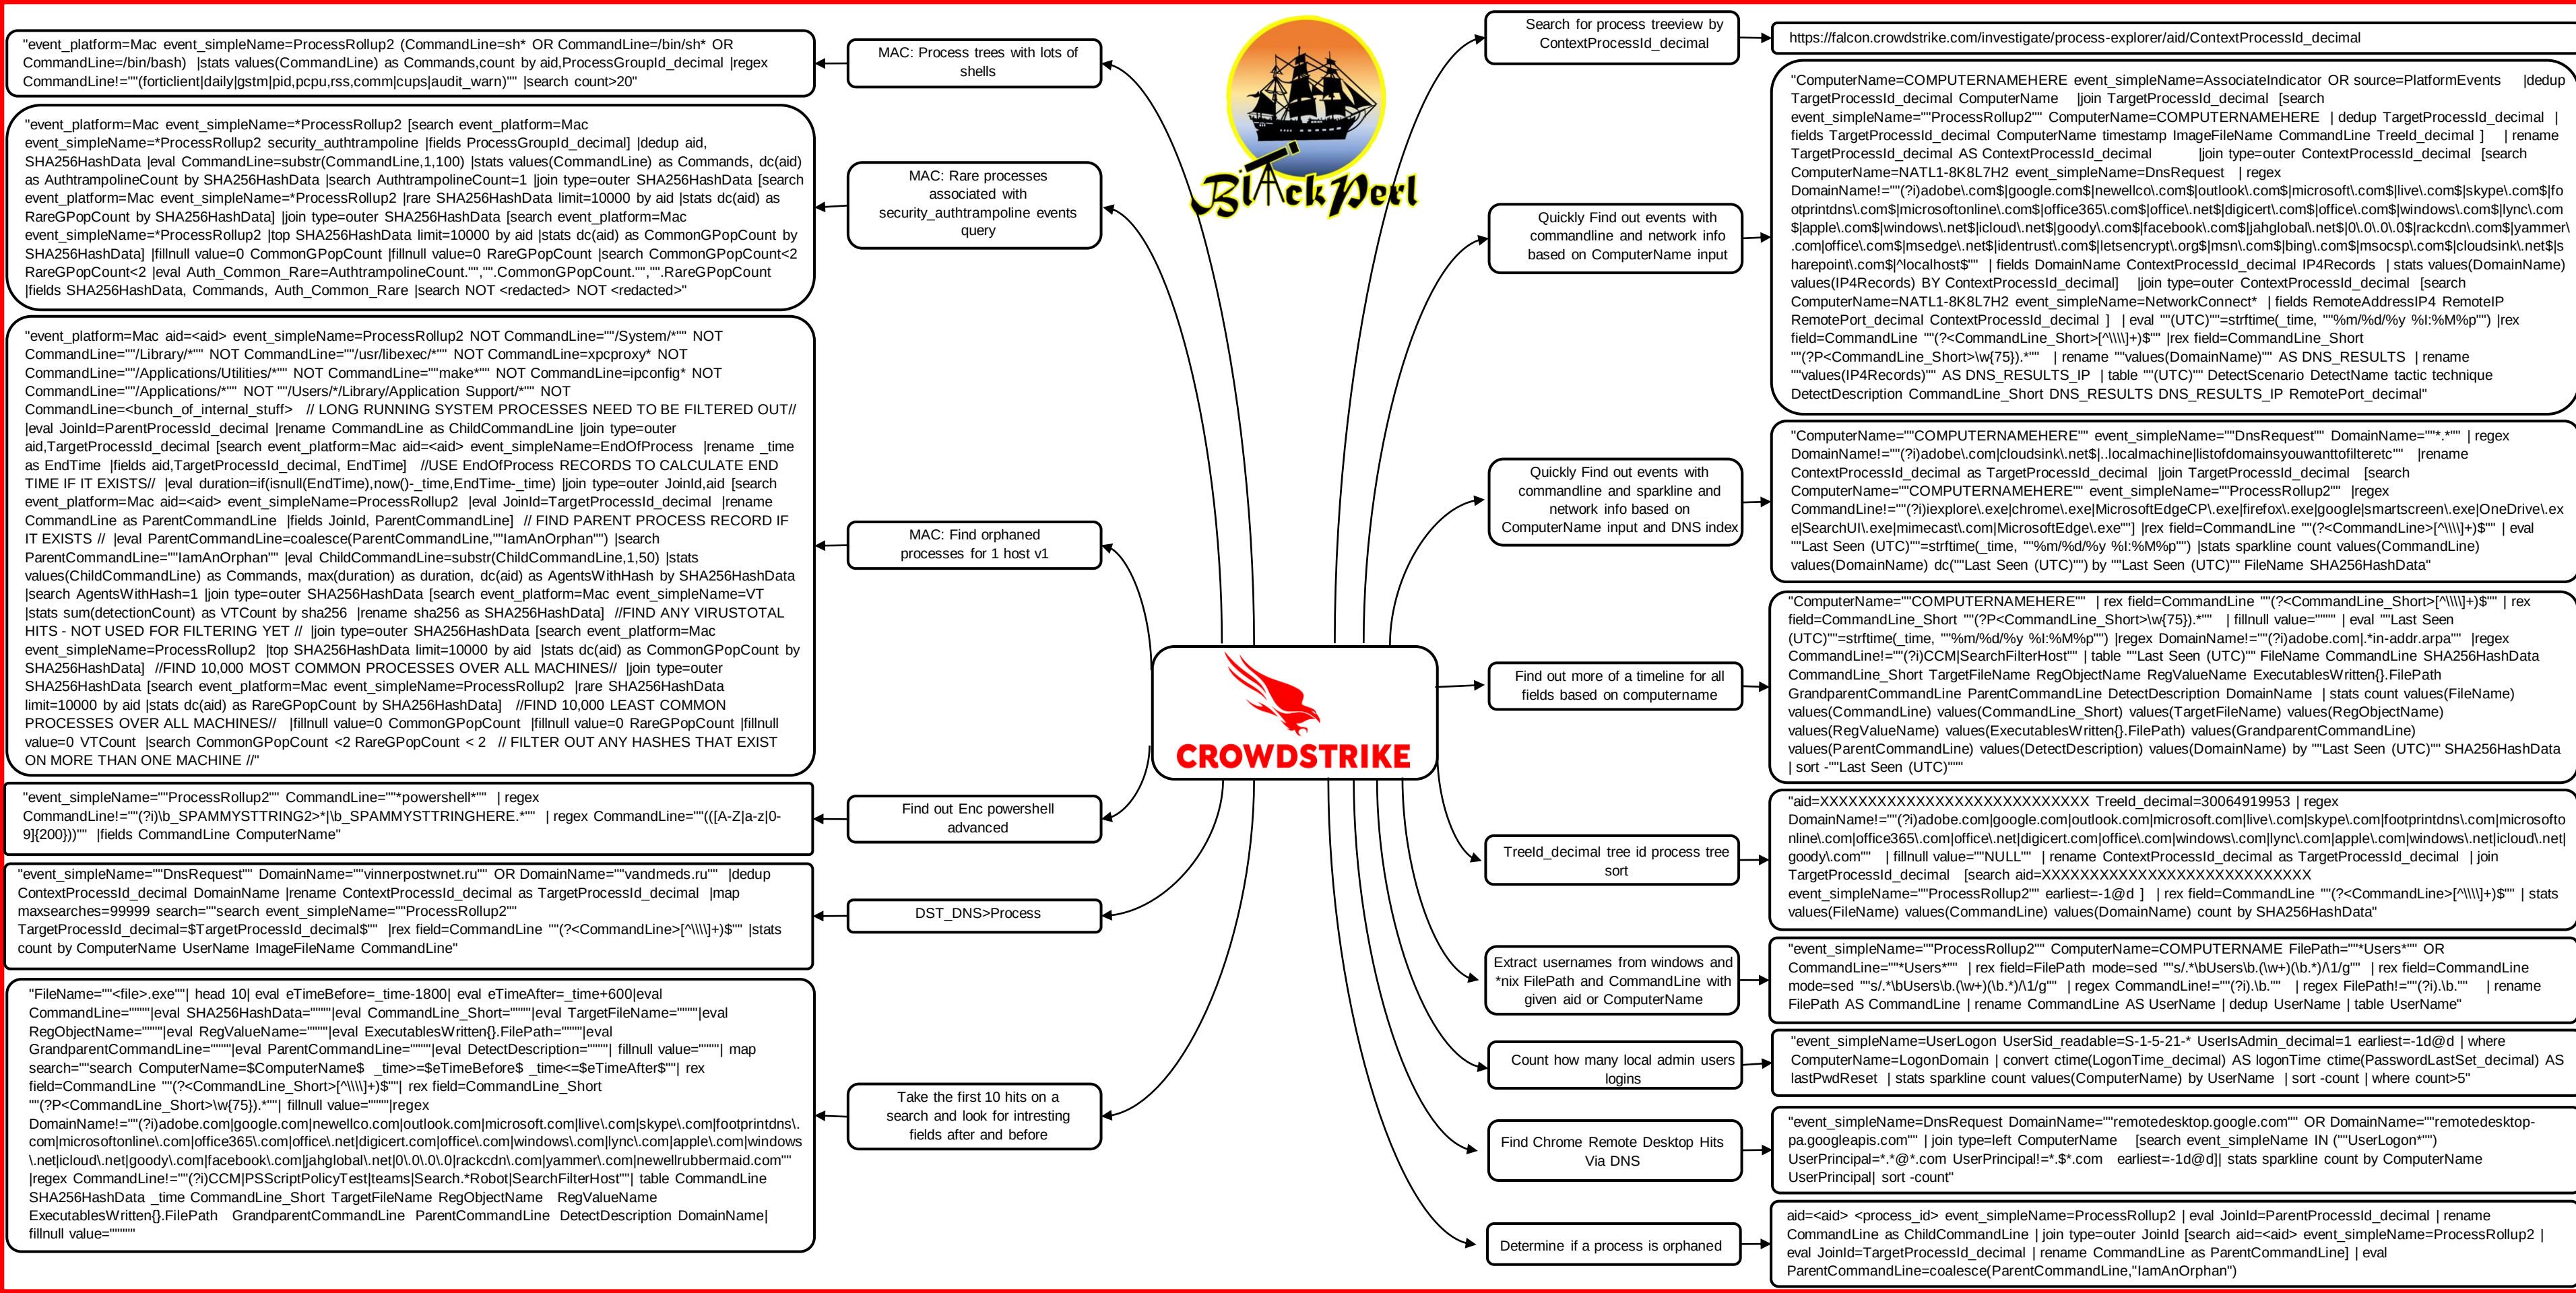

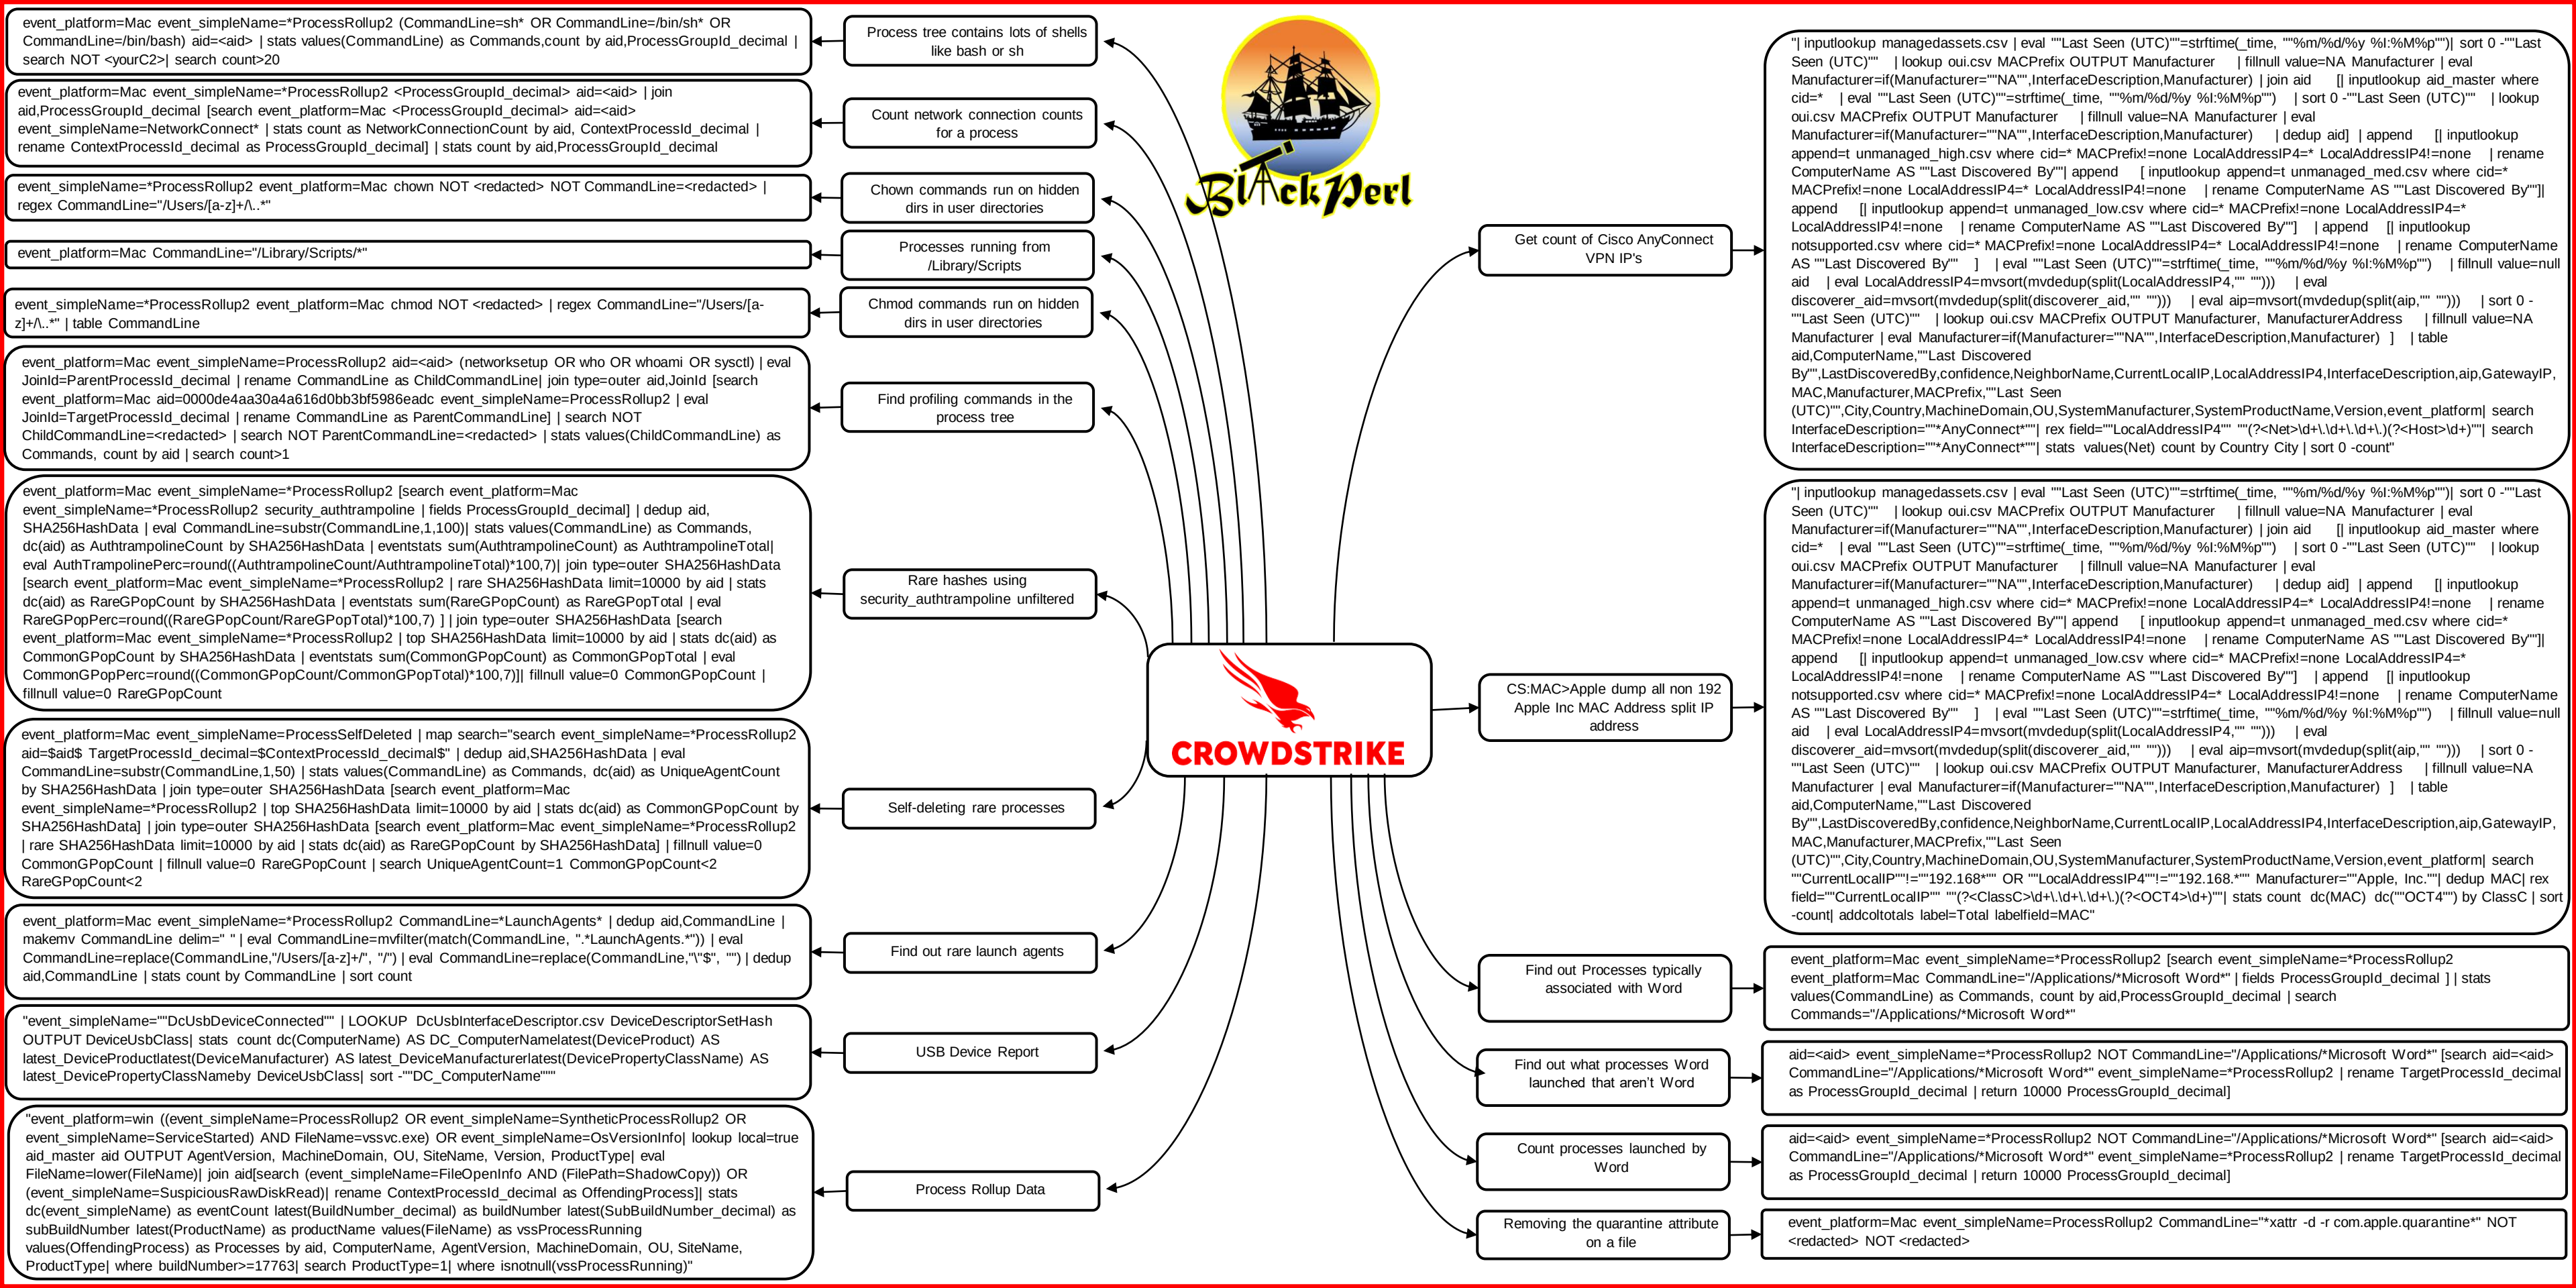



Create base64 lookup / macro to encode / decode base64

Find orphaned processes for a host v1 (filtering on common hashes)

Search for remote access servers running

Find orphaned processes for a host v2 (filtering based on common hashes and duration of process)

Reporting by Country/City/Criticality filtering out custom IOA's

Find out rare hashes using security_authtrampoline

Long-running process with few network connections - no filtering

Copy from tmp directories to user directories

Find out Busy process trees

Long-running process with few network connections - with filtering

Find out Processes running from tmp dirs

Process tree contains both sh and launchctl

```
event_platform=Mac aid=<aid> event_simpleName=ProcessRollup2 NOT CommandLine="/System/*" NOT
CommandLine="/Library/*" NOT CommandLine="/usr/libexec/*" NOT CommandLine=xpcproxy* NOT
CommandLine="/Applications/Utilities/*" NOT CommandLine="make*" NOT CommandLine=ipconfig* NOT
CommandLine="/Applications/*" NOT "/Users/*/Library/Application Support/*" NOT
CommandLine=<bunch_of_internal_stuff> | eval JoinId=ParentProcessId_decimal | rename CommandLine as
ChildCommandLine | join type=outer aid,TargetProcessId_decimal [search event_platform=Mac aid=<aid>
event_simpleName=EndOfProcess | rename _time as EndTime | fields aid,TargetProcessId_decimal, EndTime] | eval
duration=if(isnull(EndTime),now()-_time,EndTime-_time) | join type=outer JoinId,aid [search event_platform=Mac
aid=<aid> event_simpleName=ProcessRollup2 | eval JoinId=TargetProcessId_decimal | rename CommandLine as
ParentCommandLine | fields JoinId, ParentCommandLine] | eval
ParentCommandLine=coalesce(ParentCommandLine,"IamAnOrphan") | search ParentCommandLine="IamAnOrphan" |
eval ChildCommandLine=substr(ChildCommandLine,1,50) | stats values(ChildCommandLine) as Commands,
max(duration) as duration, dc(aid) as AgentsWithHash by SHA256HashData| search AgentsWithHash=1| join type=outer
SHA256HashData [search event_platform=Mac event_simpleName=VT | stats sum(detectionCount) as VTCount by
sha256 | rename sha256 as SHA256HashData] | join type=outer SHA256HashData [search event_platform=Mac
event_simpleName=ProcessRollup2 | top SHA256HashData limit=10000 by aid | stats dc(aid) as CommonGPopCount by
SHA256HashData] | join type=outer SHA256HashData [search event_platform=Mac event_simpleName=ProcessRollup2
| rare SHA256HashData limit=10000 by aid | stats dc(aid) as RareGPopCount by SHA256HashData] | fillnull value=0
CommonGPopCount | fillnull value=0 RareGPopCount| fillnull value=0 VTCount | search CommonGPopCount<2
RareGPopCount<2
```

```
event_platform=Mac aid=<aid> event_simpleName=ProcessRollup2 NOT CommandLine="/System/*" NOT
CommandLine="/Library/*" NOT CommandLine="/usr/libexec/*" NOT CommandLine=xpcproxy* NOT
CommandLine="/Applications/Utilities/*" NOT CommandLine="make*" NOT CommandLine=ipconfig* NOT
CommandLine="/Applications/*" NOT "/Users/*/Library/Application Support/*" NOT
CommandLine=<bunch_of_internal_stuff> | eval JoinId=ParentProcessId_decimal | rename CommandLine as
ChildCommandLine | join type=outer aid,TargetProcessId_decimal [search event_platform=Mac aid=<aid>
event_simpleName=EndOfProcess | rename _time as EndTime | fields aid,TargetProcessId_decimal, EndTime] | eval
duration=if(isnull(EndTime),now()-_time,EndTime-_time) | join type=outer JoinId,aid [search event_platform=Mac
aid=<aid> event_simpleName=ProcessRollup2 | eval JoinId=TargetProcessId_decimal | rename CommandLine as
ParentCommandLine | fields JoinId, ParentCommandLine] | eval
ParentCommandLine=coalesce(ParentCommandLine,"IamAnOrphan") | search ParentCommandLine="IamAnOrphan" |
eval ChildCommandLine=substr(ChildCommandLine,1,50) | stats values(ChildCommandLine) as Commands,
max(duration) as duration, dc(aid) as AgentsWithHash by SHA256HashData | search AgentsWithHash=1 | join type=outer
SHA256HashData [search event_platform=Mac event_simpleName=VT | stats sum(detectionCount) as VTCount by
sha256 | rename sha256 as SHA256HashData] | join type=outer SHA256HashData [search event_platform=Mac
event_simpleName=ProcessRollup2 | top SHA256HashData limit=10000 by aid | stats dc(aid) as CommonGPopCount by
SHA256HashData] | join type=outer SHA256HashData [search event_platform=Mac event_simpleName=ProcessRollup2
| rare SHA256HashData limit=10000 by aid | stats dc(aid) as RareGPopCount by SHA256HashData] | fillnull value=0
CommonGPopCount | fillnull value=0 RareGPopCount| fillnull value=0 VTCount | search CommonGPopCount<2
RareGPopCount<2 (duration>10 OR VTCount>0)
```

```
event_platform=Mac event_simpleName=*ProcessRollup2 [search event_platform=Mac
event_simpleName=*ProcessRollup2 security_authtrampoline | fields ProcessGroupId_decimal] | dedup aid,
SHA256HashData | eval CommandLine=substr(CommandLine,1,100) | stats values(CommandLine) as Commands,
dc(aid) as AuthtrampolineCount by SHA256HashData | search AuthtrampolineCount=1 | join type=outer
SHA256HashData [search event_platform=Mac event_simpleName=*ProcessRollup2 | rare SHA256HashData
limit=10000 by aid | stats dc(aid) as RareGPopCount by SHA256HashData] | join type=outer SHA256HashData [search
event_platform=Mac event_simpleName=*ProcessRollup2 | top SHA256HashData limit=10000 by aid | stats dc(aid) as
CommonGPopCount by SHA256HashData] | fillnull value=0 CommonGPopCount | fillnull value=0 RareGPopCount |
search CommonGPopCount<2 RareGPopCount<2 | eval
Auth_Common_Rare=AuthtrampolineCount.".".CommonGPopCount.".".RareGPopCount | fields SHA256HashData,
Commands, Auth_Common_Rare
```

```
event_platform=Mac event_simpleName=ProcessRollup2 FileName=cp CommandLine="*tmp*Users*"
```

```
event_platform=Mac event_simpleName=ProcessRollup2 aid=<aid> NOT [search event_platform=Mac
event_simpleName=ProcessRollup2 (CommandLine=<yourC2> OR ...) aid=<aid> | fields ProcessGroupId_decimal] | join
type=outer TargetProcessId_decimal [search event_platform=Mac aid=<aid> event_simpleName=EndOfProcess | rename
_time as EndTime | fields aid,TargetProcessId_decimal, EndTime] | eval duration=if(isnull(EndTime),now()-
_time,EndTime-_time) | join type=outer aid,ProcessGroupId_decimal [search event_platform=Mac
event_simpleName=NetworkConnect* aid=<aid> | stats count as NetworkConnectionCount by aid,
ContextProcessId_decimal | rename ContextProcessId_decimal as ProcessGroupId_decimal] | search duration>86399
NetworkConnectionCount<5
```

```
event_platform=Mac aid=<aid> event_simpleName=*ProcessRollup2 (sh OR launchctl) | transaction
aid,ProcessGroupId_decimal | search sh launchctl NOT <redacted>
```

```
"| makeresults | fields - _time | eval bin=""0000 0001 0010 0011 0100 0101 0110 0111 1000 1001 1010 1011 1100 1101
1110 1111"" | makemv delim="" "" bin | mvexpand bin | map [| makeresults | fields - _time | eval bin=""$bin$0000
$bin$0001 $bin$0010 $bin$0011 $bin$0100 $bin$0101 $bin$0110 $bin$0111 $bin$1000 $bin$1001 $bin$1010
$bin$1011 $bin$1100 $bin$1101 $bin$1110 $bin$1111"" | makemv delim="" "" bin | mvexpand bin | maxsearches=16 |
mvcombine bin | eval dec=mvrange(0,256) | eval data=mzip(bin,dec) | fields - bin,dec | mvexpand data | rex field=data
""(?<bin>ld+),(?<dec>ld+)"" | fields - data | eval ascii=printf("%c",dec), hex=printf("%02X",dec) | join type=outer dec
[ makeresults | fields - _time | eval
base64=""ABCDEFGHJKLMNPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789+/" | rex field=base64
mode=sed ""s/./g"" | makemv delim="" "" base64 | eval dec=mvrange(0,64) | eval data=mzip(base64,dec) | fields
- base64,dec | mvexpand data | rex field=data ""(?<base64char>[^\,]+),(?<dec>[^\,]+)"" | fields - data ] | eval
base64bin=if(isnotnull(base64char),substr(bin,3,6),NULL()) | append [| makeresults | eval base64bin=""000000"" |
eval base64char=""="" | fields - _time ] | outputlookup conversionmatrix.csv -----
----- Create Macro to Decode base64dec(1): arg1 will be your arguments -----
----- eval b64x_split=split($arg1$,",") | lookup conversionmatrix.csv base64char as b64x_split OUTPUT base64bin
as b64x_bin | eval b64x_join=mvjoin(b64x_bin,",") | rex field=b64x_join ""(?<b64x_by8>.{8})"" max_match=0 | lookup
conversionmatrix.csv bin as b64x_by8 output ascii as b64x_out | eval $arg1$_ascii=mvjoin(b64x_out,",") | fields -
b64x_* ----- Create Macro to Encode base64enc(1): arg1 will be your
arguments ----- eval b64x_split=split($arg1$,",") | lookup
conversionmatrix.csv ascii as b64x_split output bin as b64x_bin | eval
b64x_join=mvjoin(b64x_bin,","),b64x_join=if(len(b64x_join)%6>0,b64x_join.""000000"",b64x_join) | rex field=b64x_join
""(?<b64x_by6>.{6})"" max_match=0 | lookup conversionmatrix.csv base64bin as b64x_by6 output base64char as
b64x_out | eval $arg1$_base64=mvjoin(b64x_out,",") | fields - b64x_* -----
-- Usage: ----- | makeresults | eval
cs1=""MTAxMDEwMTAxCG==~VGhpcyBpcyBhbm90aGVyCG=="" | makemv delim=~ cs1 | mvexpand cs1 |
`base64dec(cs1)` | makeresults | eval cs1=""splunk"" | `base64enc(cs1)` | `base64dec(cs1_base64)`
```

```
"event_simpleName=""ProcessRollup2"" FileName=""r_server.exe"" OR FileName=""remotelyanywhere.exe""OR
FileName=""raabout.exe""OR FileName=""DNTUS26.exe""OR FileName=""DWRcST.EXE""OR
FileName=""awhost32.exe""OR FileName=""AWHOST32.EXE""OR FileName=""TeamViewer_Service.exe""OR
FileName=""RACWInVNC.exe""OR FileName=""tvnserver.exe""OR FileName=""unltravnc.exe""OR
FileName=""winvnc.exe""OR FileName=""VNCHooks.dll""OR FileName=""LogMeIn.exe""OR
FileName=""winvnc4.exe""OR FileName=""g2svc.exe""OR FileName=""vncserver.exe""|eval FileName=lower(FileName) |
rex field=FileName mode=sed ""s/awhost32.exe/awhost32.exe Symantec PCAnywhere/g"" | rex field=FileName
mode=sed ""s/tvnserver.exe/tvnserver.exe TightVNC Server/g"" | rex field=FileName mode=sed ""s/dwrcst.exe/dwrcst.exe
Dameware NT Utilities/g"" | rex field=FileName mode=sed ""s/dntus26.exe/dntus26.exe Dameware NT Utilities/g""| join
type=left aid [| inputlookup aid_master where cid=* | dedup aid | fields aid City Country OU SystemProductName ]|
join type=left UserName [search event_simpleName IN ("UserLogon")
UserPrincipal!="svcsCOM.SvcNow@newellco.com" UserPrincipal=*. *@*.com UserPrincipal!=*. *.com
UserName!=svcsCCM.ClientPush UserName!=SYSTEM earliest=-2d@d]| rename UserPrincipal to UserName| stats
count values(FileName) values(UserName) values(City) values(Country) values(OU) values(SystemProductName) by
ComputerName| sort -count "
```

```
"earliest=-45d ExternalApiType=Event_DetectionSummaryEvent (Tactic!="Custom Intelligence" AND
SeverityName!=Informational) | lookup aid_master ComputerName OUTPUT AgentVersion BiosManufacturer
BiosVersion ChassisType City ConfigIDBuild Continent Country MachineDomain OU SiteName SystemManufacturer
SystemProductName | lookup local=true managedassets.csv aid OUTPUT GatewayIP InterfaceDescription MACPrefix |
lookup local=true oui.csv MACPrefix OUTPUT Manufacturer | fillnull value=NA Manufacturer | eval
Manufacturer=if(Manufacturer=""NA"",InterfaceDescription,Manufacturer) | rex field=""LocalIP""
""(?<Net>\d+\.\d+\.\d+)\.(?<Host>\d+)"" | eval Severity=case(SeverityName=""NULL"",5,SeverityName=""High"",2,
SeverityName=""Medium"",3, SeverityName=""Low"",4) | fillnull value=NULL | stats count dc(ComputerName) AS
Uniq_ComputerName values(Tactic) values(Technique) count(City) dc(Net) AS ""Number of Uniq Network Ranges""
values(SiteName) values(OU) by Country Severity City | sort -Uniq_ComputerName,Severity,Country,City"
```

```
event_platform=Mac event_simpleName=ProcessRollup2 aid=<aid> | join type=outer ContextProcessId_decimal [search
event_platform=Mac aid=<aid> event_simpleName=EndOfProcess | rename _time as EndTime | fields
aid,ContextProcessId_decimal, EndTime] | eval duration=if(isnull(EndTime),now()-_time,EndTime-_time) | join type=outer
aid,ProcessGroupId_decimal [search event_platform=Mac event_simpleName=NetworkConnect* aid=<aid> | stats count
as NetworkConnectionCount by aid, ContextProcessId_decimal | rename ContextProcessId_decimal as
ProcessGroupId_decimal] | search duration>86399 NetworkConnectionCount<5
```

```
event_platform=Mac event_simpleName=ProcessRollup2 | stats count by ProcessGroupId_decimal,aid | search count>50
| map search="search aid=$aid$ ProcessGroupId_decimal=$ProcessGroupId_decimal$
TargetProcessId_decimal=$ProcessGroupId_decimal$" | search NOT CommandLine=<redacted> NOT
CommandLine=<redacted>
```

```
event_platform=Mac event_simpleName=ProcessRollup2 (CommandLine="/tmp/*" OR CommandLine="/private/tmp/*")
NOT <redacted> NOT <redacted> NOT <redacted>
```



```
"| inputlookup managedassets.csv | eval ""Last Seen (UTC)""=strtime(_time, ""%m/%d/%y %l:%M%p"" ) | sort 0 -""Last Seen (UTC)"" | lookup oui.csv MACPrefix OUTPUT Manufacturer | fillnull value=NA Manufacturer | eval Manufacturer=if(Manufacturer=""NA"",InterfaceDescription,Manufacturer) | join aid [| inputlookup aid_master where cid=* | eval ""Last Seen (UTC)""=strtime(_time, ""%m/%d/%y %l:%M%p"" ) | sort 0 -""Last Seen (UTC)"" | lookup oui.csv MACPrefix OUTPUT Manufacturer | fillnull value=NA Manufacturer | eval Manufacturer=if(Manufacturer=""NA"",InterfaceDescription,Manufacturer) | dedup aid] | append [| inputlookup append=t unmanaged_high.csv where cid=* MACPrefix!=none LocalAddressIP4=* LocalAddressIP4!=none | rename ComputerName AS ""Last Discovered By"" | append [| inputlookup append=t unmanaged_med.csv where cid=* MACPrefix!=none LocalAddressIP4=* LocalAddressIP4!=none | rename ComputerName AS ""Last Discovered By"" ] | append [| inputlookup append=t unmanaged_low.csv where cid=* MACPrefix!=none LocalAddressIP4=* LocalAddressIP4!=none | rename ComputerName AS ""Last Discovered By"" ] | append [| inputlookup notsupported.csv where cid=* MACPrefix!=none LocalAddressIP4=* LocalAddressIP4!=none | rename ComputerName AS ""Last Discovered By"" ] | eval ""Last Seen (UTC)""=strtime(_time, ""%m/%d/%y %l:%M%p"" ) | fillnull value=null aid | eval LocalAddressIP4=mvsort(mvdedup(split(LocalAddressIP4,"" ""))) | eval discoverer_aid=mvsort(mvdedup(split(discoverer_aid,"" ""))) | eval aip=mvsort(mvdedup(split(aip,"" ""))) | sort 0 -""Last Seen (UTC)"" | lookup oui.csv MACPrefix OUTPUT Manufacturer, ManufacturerAddress | fillnull value=NA Manufacturer | eval Manufacturer=if(Manufacturer=""NA"",InterfaceDescription,Manufacturer) ] | table aid,ComputerName,""Last Discovered By"",LastDiscoveredBy,confidence,NeighborName,CurrentLocalIP,LocalAddressIP4,InterfaceDescription,aip,GatewayIP,MAC,Manufacturer,MACPrefix,""Last Seen (UTC)"",City,Country,MachineDomain,OU,SystemManufacturer,SystemProductName,Version,event_platform,FalconGroupingTags | append [|inputlookup aws_ec2_images.csv] | append [|inputlookup aws_ec2_instances.csv] | append [|inputlookup aws_ec2_mac_ip_lookup.csv] | append [|inputlookup aws_ec2_networkacl_entries.csv] | append [|inputlookup aws_ec2_networkacls.csv] | append [|inputlookup aws_ec2_networkinterface_privateips.csv] | append [|inputlookup aws_ec2_networkinterfaces.csv] | append [|inputlookup aws_ec2_securitygroup_rules.csv] | append [|inputlookup aws_ec2_securitygroups.csv] | append [|inputlookup aws_ec2_subnets.csv] | append [|inputlookup aws_ec2_volumes.csv] | append [|inputlookup aws_ec2_vpcs.csv] | append [|inputlookup aws_iam_account_aliases.csv] | search ""CurrentLocalIP""!= ""XXXXX"" OR ""LocalAddressIP4""!= ""XXXXX"" "
```

Get information about all Asset



City,State of possible Wireless Hot Spot usage (WIP old need more wireless network ranges)

```
"| inputlookup managedassets.csv | eval ""Last Seen (UTC)""=strtime(_time, ""%m/%d/%y %l:%M%p"" ) | sort 0 -""Last Seen (UTC)"" | lookup oui.csv MACPrefix OUTPUT Manufacturer | fillnull value=NA Manufacturer | eval Manufacturer=if(Manufacturer=""NA"",InterfaceDescription,Manufacturer) | join aid [| inputlookup aid_master where cid=* | eval ""Last Seen (UTC)""=strtime(_time, ""%m/%d/%y %l:%M%p"" ) | sort 0 -""Last Seen (UTC)"" | lookup oui.csv MACPrefix OUTPUT Manufacturer | fillnull value=NA Manufacturer | eval Manufacturer=if(Manufacturer=""NA"",InterfaceDescription,Manufacturer) | dedup aid] | append [| inputlookup append=t unmanaged_high.csv where cid=* MACPrefix!=none LocalAddressIP4=* LocalAddressIP4!=none | rename ComputerName AS ""Last Discovered By"" | append [| inputlookup append=t unmanaged_med.csv where cid=* MACPrefix!=none LocalAddressIP4=* LocalAddressIP4!=none | rename ComputerName AS ""Last Discovered By"" ] | append [| inputlookup append=t unmanaged_low.csv where cid=* MACPrefix!=none LocalAddressIP4=* LocalAddressIP4!=none | rename ComputerName AS ""Last Discovered By"" ] | append [| inputlookup notsupported.csv where cid=* MACPrefix!=none LocalAddressIP4=* LocalAddressIP4!=none | rename ComputerName AS ""Last Discovered By"" ] | eval ""Last Seen (UTC)""=strtime(_time, ""%m/%d/%y %l:%M%p"" ) | fillnull value=null aid | eval LocalAddressIP4=mvsort(mvdedup(split(LocalAddressIP4,"" ""))) | eval discoverer_aid=mvsort(mvdedup(split(discoverer_aid,"" ""))) | eval aip=mvsort(mvdedup(split(aip,"" ""))) | sort 0 -""Last Seen (UTC)"" | lookup oui.csv MACPrefix OUTPUT Manufacturer, ManufacturerAddress | fillnull value=NA Manufacturer | eval Manufacturer=if(Manufacturer=""NA"",InterfaceDescription,Manufacturer) ] | search aip=166.128.0.0/9 OR aip=174.192.0.0/10 OR aip=97.128.0.0/9 OR aip=70.192.0.0/11 OR aip=69.96.0.0/13 OR aip=69.82.0.0/15 OR aip=66.174.0.0/16 OR aip=72.96.0.0/11 OR aip=75.192.0.0/10 OR aip=97.0.0.0/10 OR aip=107.64.0.0/10 OR aip=160.170.220.0/22 OR aip=166.128.0.0/13 OR aip=166.136.0.0/15 OR aip=166.138.0.0/16 OR aip=166.147.104.0/25 OR aip=166.170.0.0/19 OR aip=166.170.32.0/20 OR aip=166.170.48.0/21 OR aip=166.170.56.0/22 OR aip=166.171.56.0/22 OR aip=166.171.120.0/22 OR aip=166.171.184.0/22 OR aip=166.171.248.0/22 OR aip=166.172.56.0/22 OR aip=166.172.60.0/22 OR aip=166.172.120.0/22 OR aip=166.172.184.0/22 OR aip=166.172.188.0/22 OR aip=166.173.56.0/22 OR aip=166.173.60.0/22 OR aip=166.173.184.0/22 OR aip=166.173.248.0/22 OR aip=166.175.56.0/22 OR aip=166.175.60.0/22 OR aip=166.175.184.0/22 OR aip=166.175.188.0/22 OR aip=166.176.56.0/22 OR aip=166.176.120.0/22 OR aip=166.176.184.0/22 OR aip=166.176.248.0/22 OR aip=166.177.56.0/22 OR aip=166.177.120.0/22 OR aip=166.177.184.0/22 OR aip=166.177.248.0/22 OR aip=166.216.133.103/32 OR aip=166.216.133.208/28 OR aip=166.216.133.231/32 OR aip=166.216.133.231/32 OR aip=166.216.133.64/28 OR aip=166.216.157.0/24 OR aip=166.216.158.0/24 OR aip=166.216.159.0/24 OR aip=166.216.165.0/24 OR aip=162.160.0.0/11 OR aip=172.32.0.0/11 OR aip=208.54.0.0/17 OR aip=208.54.128.0/19 OR aip=100.128.0.0/9 OR aip=50.28.192.0/18 OR aip=173.96.0.0/11 OR aip=174.155.64.0/18 OR aip=24.221.0.0/16 OR aip=66.87.0.0/16 OR aip=99.200.0.0/13 OR aip=70.12.0.0/15 OR aip=70.8.0.0/14 OR aip=70.14.0.0/16 OR aip=70.0.0.0/13 OR aip=107.32.0.0/11 OR aip=107.24.0.0/13 OR aip=108.102.0.0/16 OR aip=108.96.0.0/11 OR aip=184.204.0.0/16 OR aip=68.24.0.0/13 OR aip=68.240.0.0/13 OR aip=66.1.0.0/22 OR aip=72.56.0.0/13 OR aip=100.48.0.0/12 | table aid,ComputerName,""Last Discovered By"",LastDiscoveredBy,confidence,NeighborName,CurrentLocalIP,LocalAddressIP4,InterfaceDescription,aip,GatewayIP,MAC,Manufacturer,MACPrefix,""Last Seen (UTC)"",City,Country,MachineDomain,OU,SystemManufacturer,SystemProductName,Version,event_platform | stats count values(aip) by City Country | sort -count"
```

