

Top Useful IP COMMANDS

for Windows



ipconfig

Displays and configures the IP address and other network details

Common Usage:

ipconfig: Shows IP address, subnet mask, and default gateway

ipconfig /all: Displays detailed network configuration (including MAC address and DNS servers)

ipconfig /release: Releases the current IP address

ipconfig /renew: Renews the IP address from the DHCP server

ipconfig /flushdns: Clears the DNS resolver cache



ping


Checks connectivity with another device or server.

Common Usage:

`ping [hostname or IP]`: Sends ICMP Echo requests to a host to verify connectivity

`ping -t [IP]`: Continuously pings until stopped (use Ctrl + C to stop)

`ping -l [size] [IP]`: Sends packets of specific size for testing

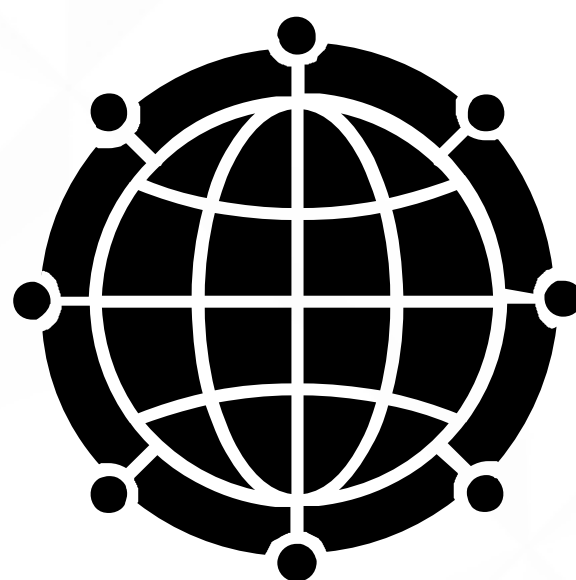


tracert

Traces the path that packets follow to reach a destination host.

Common Usage:

`tracert [hostname or IP]`: Displays each hop (router) along the route to the destination

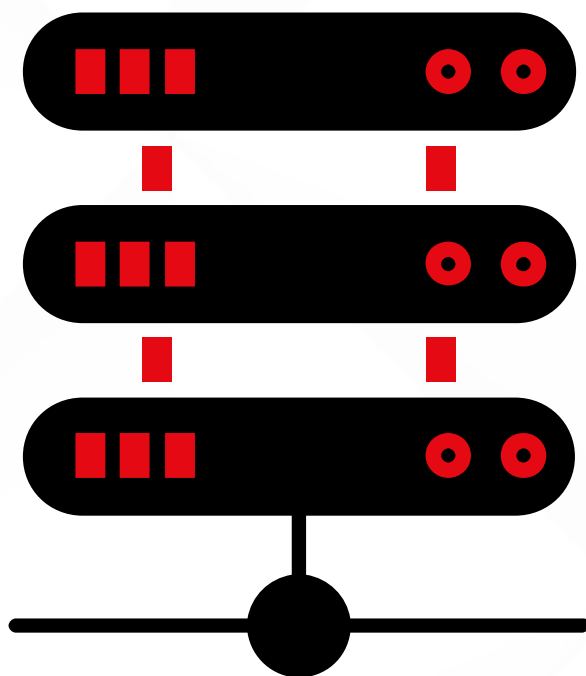

netstat

Displays network connections, routing tables, and statistics.

Common Usage:

netstat: Shows active connections

netstat -a: Displays all active and listening ports

netstat -n: Shows active connections numerically (IP and port numbers)

netstat -o: Displays each connection's PID (Process ID)




nslookup

Queries DNS servers to resolve domain names to IP addresses.

Common Usage:

`nslookup [hostname]`: Retrieves the IP address for the hostname

`nslookup`: Enter interactive mode to query DNS records manually

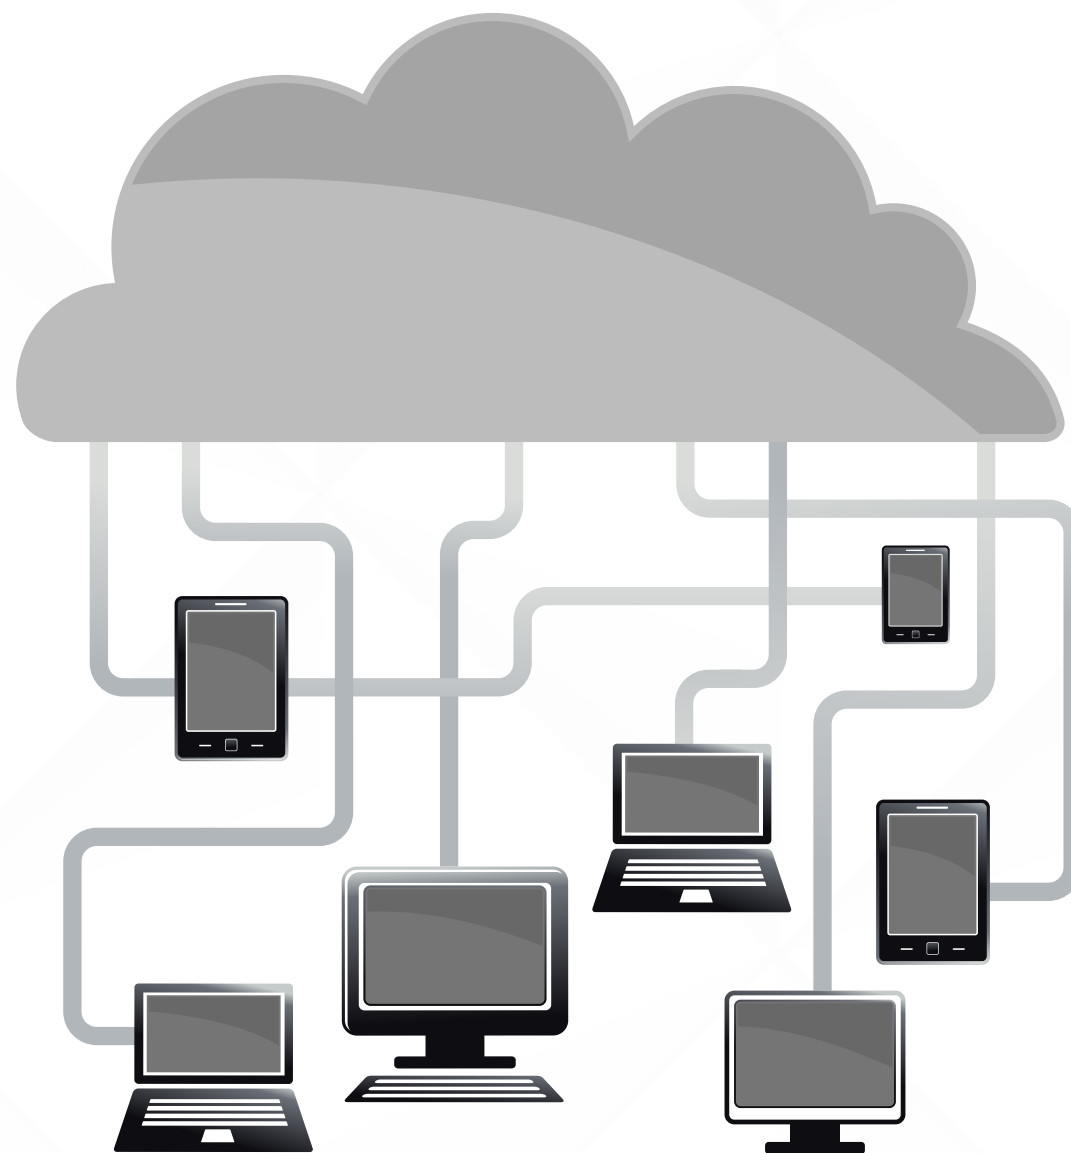

arp

Displays and manages the ARP (Address Resolution Protocol) cache.

Common Usage:

`arp -a`: Shows the current ARP table

`arp -d [IP]`: Deletes an ARP entry

`arp -s [IP] [MAC address]`: Adds a static ARP entry



route

Displays and modifies the local IP routing table.

Common Usage:

`route print`: Displays the current routing table

`route add [destination] mask [subnet mask] [gateway]`: Adds a new route

`route delete [destination]`: Deletes a route



netsh

Configures and displays network settings.

Common Usage:

`netsh interface ip show config`: Displays IP configuration for all network adapters

`netsh wlan show profiles`: Lists all Wi-Fi profiles saved on the computer

`netsh int ip reset`: Resets TCP/IP stack settings to default



telnet

Tests connectivity to a specific port on a remote host.

Common Usage:

`telnet [hostname or IP] [port]`: Checks if a specific port is open



Get-NetIPAddress (PowerShell)

Retrieves the IP address configuration using PowerShell.

Common Usage:

Get-NetIPAddress: Displays all IP addresses configured on the system



whoami

Displays the currently logged-in user and computer details.

Common Usage:

whoami: Shows the username

whoami /fqdn: Shows the fully qualified domain name




net use

Manages shared resources on the network.

Common Usage:

net use: Lists all connected shared resources

net use [drive]: \\[server]\\[share]: Maps a network drive

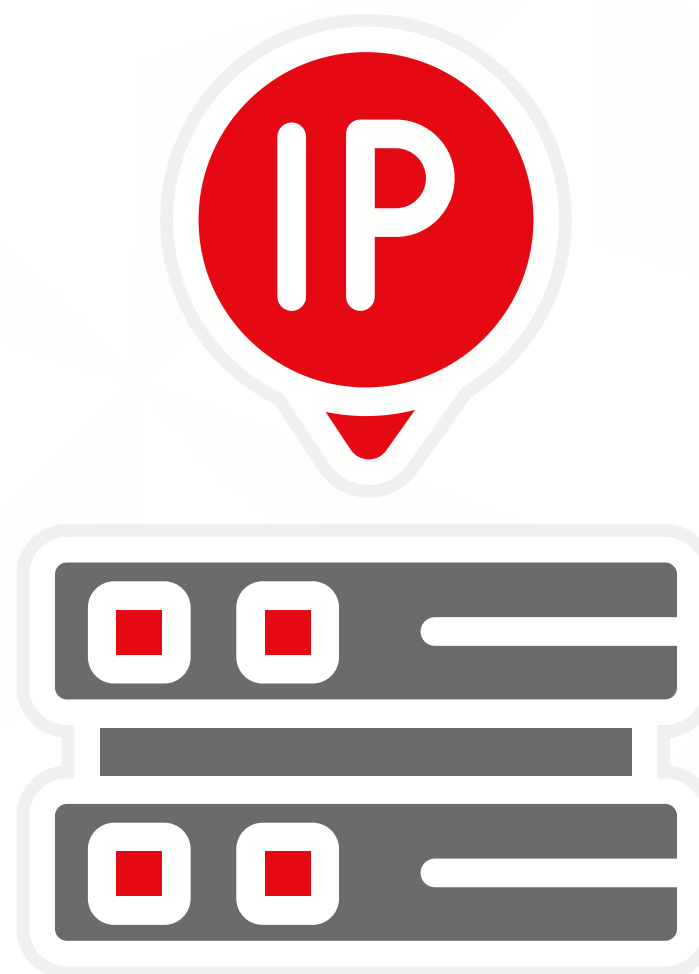

FOUND THIS USEFUL?

***Get More Insights Through Our
FREE***


Courses

Workshops

eBooks

Checklists

Mock Tests



INFOSECTRAIN



Like



Share



Follow