| | |
|---|---|
| **Status** | Finished |
| **Started** | Monday, 31 August 2026, 10:55 AM |
| **Completed** | Monday, 31 August 2026, 10:59 AM |
| **Duration** | 4 mins 21 secs |
| **Grade** | **14.00** out of 15.00 (**93.33**%) |

Question **1**

Correct

Mark 1.00 out of 1.00

What should be the value of num1 and num2 to get the output as "1"?

```
if((num1/num2==5) and (num1+num2)>5):
    print("1")
elif((num1-num2)<=1 or (num1%num2)==0):
    print("2")
else:
    print("3")
```

a. num1=5, num2=1 ✓

b. num1=11, num2=2

c. num1=-10,num2=2

d. num1=0, num2=5

Question **2**

Correct

Mark 1.00 out of 1.00

Which among the following codes have equivalent logic?

**Code 1:**

```
if(value3>1000 and value3<1006):
  if(value1=="ABC"):
    if(value2=="A"):
      value4=10
    else:
      value4=8
  elif(value1=="XYZ"):
    if(value2=="A"):
      value4=8
    else:
      value4=6
print(value4)
```

**Code 2:**

```
if(value3>=1001 and value3<=1005 and value1=="ABC"):
    if(value2=="A"):
        value4=10
    else:
        value4=8
elif(value3>1000 and value3<1006 and value1=="XYZ"):
     if(value2=="A"):
        value4=8
     else:
        value4=6
print(value4)
```

**Code 3:**

```
if(value3>1000 and value3<1006 or value1=="ABC"):
   if(value2=="A"):
      value4=10
   else:
      value4=8
elif(value3>1000 and value3<1006 or  value1=="XYZ"):
   if(value2=="A"):
      value4=8
   else:
      value4=6
print(value4)
```

a. Code 1, Code 2 ✓

b. Code 2, Code 3

c. Code 1, Code 3

Question **3**

Correct

Mark 1.00 out of 1.00

What keyword would you use to add an alternative condition to an if statement?

a. elseif

b. elif ✓

c. else if

d. None of the above

Question **4**

Correct

Mark 1.00 out of 1.00

**With what extension are the python files saved?**

a. .python

b. .pyn

c. .py ✓

d. .p

Question **5**

Correct

Mark 1.00 out of 1.00

Leading whitespace (spaces and tabs) at the beginning of a statement is called _____.

a. **indentation** ✓

b. **None of the above**

c. **Iteration**

d. **orientation**

Question **6**

Incorrect

Mark 0.00 out of 1.00

```
if(x=-1):
    print("present")
else:
    print("absent")
```

a. present

b. Runtime Error

c. compilation error ✗


d. absent

Question **7**

Correct

Mark 1.00 out of 1.00

What is the output of the following code.

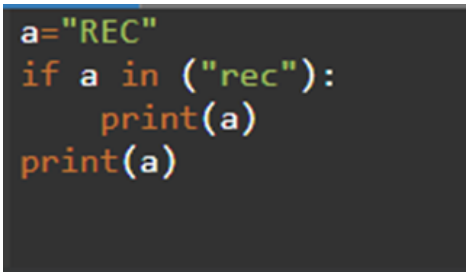


a. REC
REC

b. REC ✓

c. No output
REC

d. false
REC

Question **8**

Correct

Mark 1.00 out of 1.00

**What is the output when the following sequence of instructions is carried out in the console?**

```
a = 1;a = a + 1;a = a + 2;a = a + 3;print(a)
```

- a. 7 ✓
- b. 5
- c. 4
- d. 6

Question **9**

Correct

Mark 1.00 out of 1.00

What will be the output of the given code?

```
x,y=1,1
if(x ==y):
    print("equal")
if(x>y):
    print("1")
else:
    print("0")
```

- a. equal
- b. 1
- c. equal ✓
  0
- d. 0

Question **10**

Correct

Mark 1.00 out of 1.00

## Write the output of the following code :

```
y=2

if 2!=y:

 print("H")

else :

 print("K")
```

- a. K ✓
- b. No output
- c. Error
- d. H

Question **11**

Correct

Mark 1.00 out of 1.00

**What is the output of the following snippet?**

```
s1 = "IIT "  # Remember there is a space after T in IIT
s2 = "Punjab"
s1 = s1 * 2
s2 = "Ropar"
print(s1, s2)
```

- a. **IIT IIT Punjab**
- b. **IIT IIT  Ropar** ✓
- c. **IIT Ropar**
- d. **IIT Punjab**

Question **12**

Correct

Mark 1.00 out of 1.00

Which of the following statements in Python is used when no operation is to be performed?

- a. Jump
- b. pass ✓
- c. Empty
- d. None

Question **13**

Correct

Mark 1.00 out of 1.00

**What is the output of the given below program?**

```
if 1 + 3 == 7:
    print("Hello")
else:
    print("Know Program")
```

a. Error

b. Compiled Successfully, No Output

c. Know Program ✓

d. Hello

Question **14**

Correct

Mark 1.00 out of 1.00

What will be the output?

```
a=11
b=5
if (a%b==0):
    print ( "hello")
if (a//b==0):
    print ( "hi")
else:
    print ("python")
```

a. hello

b. hi

c. python ✓

Question **15**

Correct

Mark 1.00 out of 1.00

choose a valid Python if statement :

a. if a>=2 : ✓

b. if (a => 22)

c. if (a >= 2)