RAL environment:

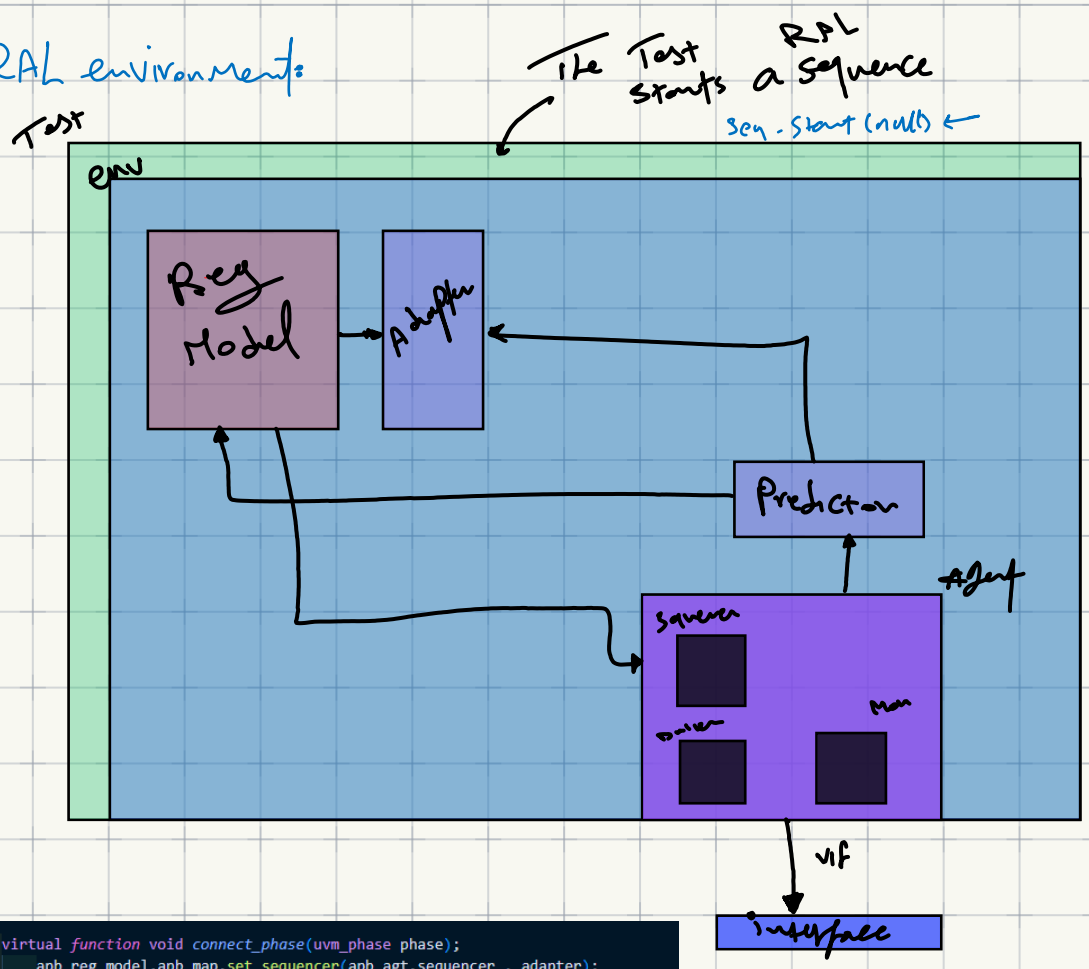

The Reg model map is connected to the agent sequencer and the adapter

The Predictor
* observes Monitor Transactions
* uses the adapter to convert the Bus transactions to generic RAL transactions
* uses the map to be able to update the model based on the transaction address

```
virtual function void connect_phase(uvm_phase phase);
    apb_reg_model.apb_map.set_sequencer(apb_agt.sequencer , adapter);
    apb_agt.apb_ap.connect(apb_predictor.bus_in);
    apb_predictor.map = apb_reg_model.apb_map;
    apb_predictor.adapter = adapter;
    `uvm_info("APB_ENV", "Connect phase complete", UVM_MEDIUM)
endfunction
```

The adapter comes with agent and provides 2 functions for reg2bus/bus2reg conversion.