ITI – Cloud Lab2

Mohammad Tarek Omar – Data Management

Lab2.1

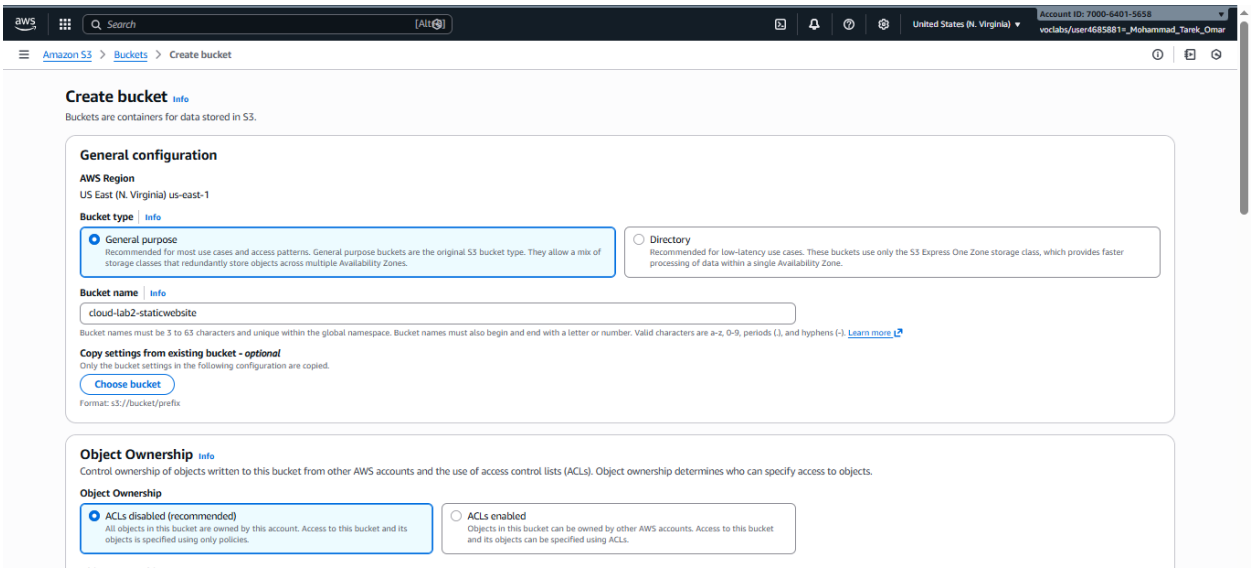

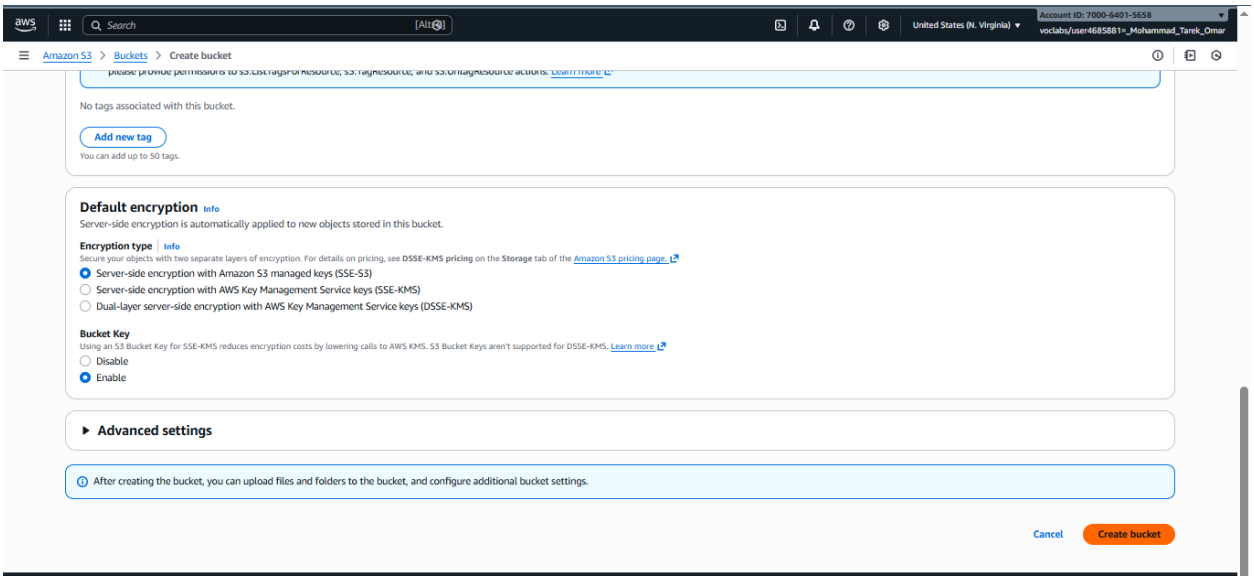

Upload Info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. Learn more

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (1 total, 504.0 B)

All files and folders in this table will be uploaded.

Remove | Add files | Add folder

Find by name

Name	Folder	Type	Size
index.html	-	text/html	504.0 B

Destination Info

Destination

s3://cloud-lab2-staticwebsite

▸ **Destination details**
Bucket settings that impact new objects stored in the specified destination.

▸ **Permissions**
Grant public access and access to other AWS accounts.

▸ **Properties**
Specify storage class, encryption settings, tags, and more.

Redirection rules – *optional*

Redirection rules, written in JSON, automatically redirect webpage requests for specific content. Learn more

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicReadGetObject",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::my-static-website-123/*"
    }
  ]
}
```

JSON Ln 12, Col 2 Errors: 0 Warnings: 0

Cancel | Save changes

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. Learn more

Edit | Delete

Copy

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicReadForStaticWebsite",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::cloud-lab2-staticwebsite/*"
    }
  ]
}
```

Object Ownership

Edit

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

Bucket owner enforced

ACLs are disabled. All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

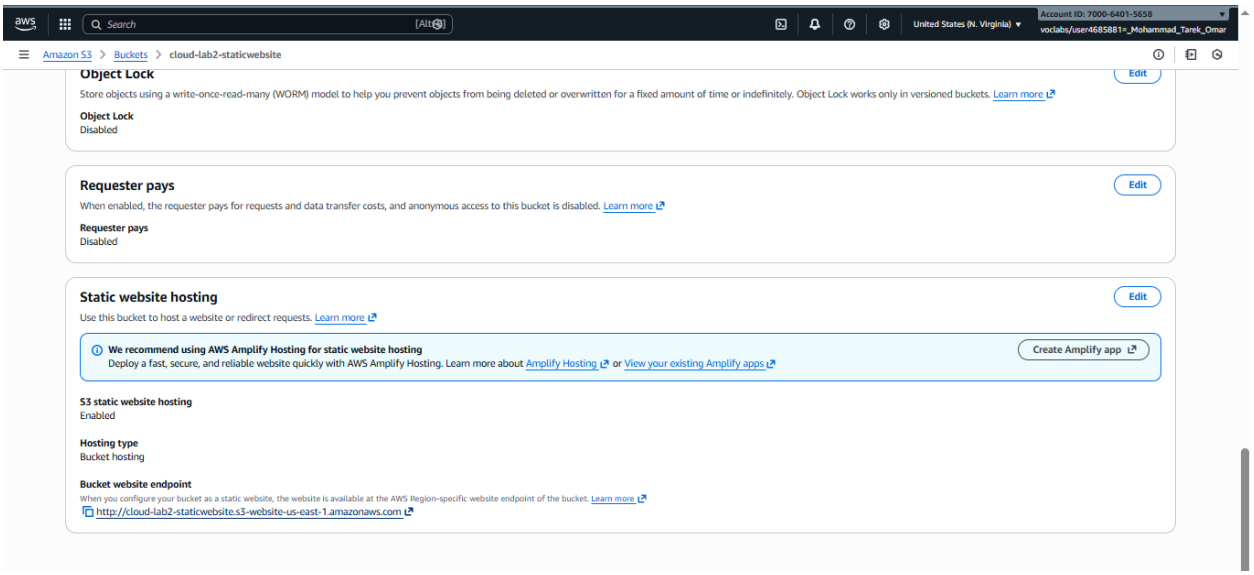
aws
Search
[Alt+S]
United States (N. Virginia)
Account ID: 7000-6401-5658
voclabs/user4685881=_Mohammad_Tarek_Omar
Amazon S3 > Buckets > cloud-lab2-staticwebsite
Object Lock
Edit
Store objects using a write-once-read-many (WORM) model to help you prevent objects from being deleted or overwritten for a fixed amount of time or indefinitely. Object Lock works only in versioned buckets. Learn more
Object Lock
Disabled
Requester pays
Edit
When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. Learn more
Requester pays
Disabled
Static website hosting
Edit
Use this bucket to host a website or redirect requests. Learn more
We recommend using AWS Amplify Hosting for static website hosting
Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. Learn more about Amplify Hosting or View your existing Amplify apps
Create Amplify app
S3 static website hosting
Enabled
Hosting type
Bucket hosting
Bucket website endpoint
When you configure your bucket as a static website, the website is available at the AWS Region-specific website endpoint of the bucket. Learn more
http://cloud-lab2-staticwebsite.s3-website-us-east-1.amazonaws.com

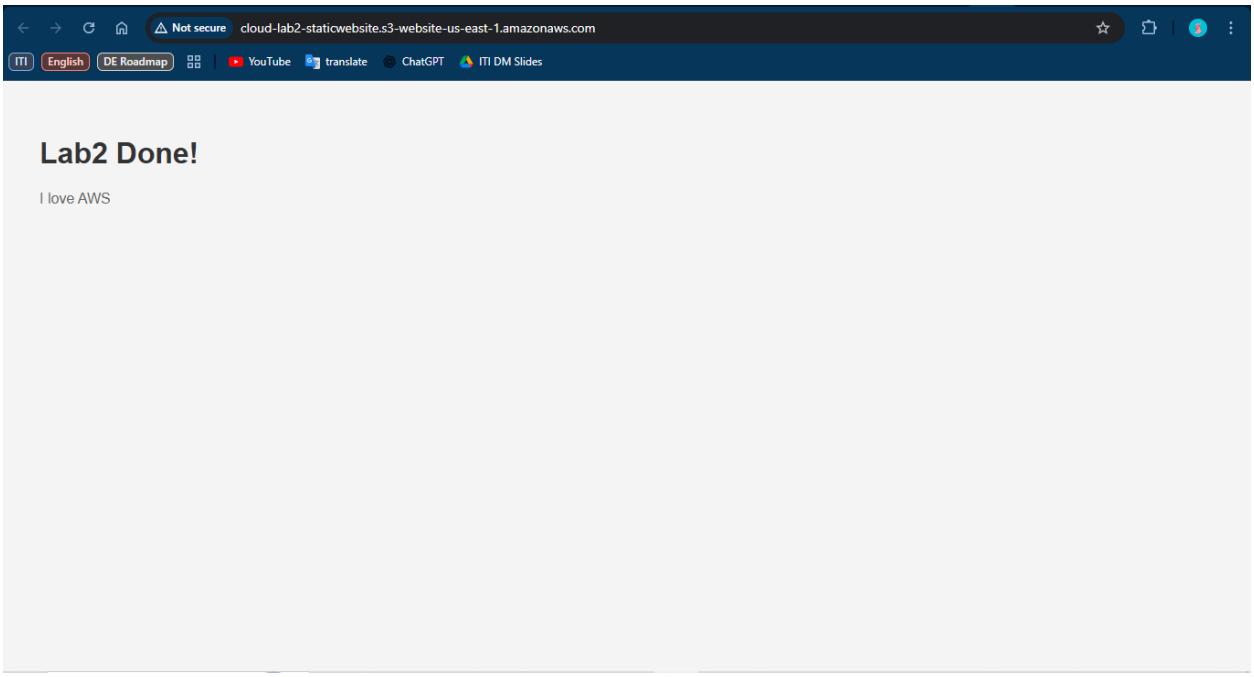
Not secure
cloud-lab2-staticwebsite.s3-website-us-east-1.amazonaws.com
ITI
English
DE Roadmap
YouTube
translate
ChatGPT
ITI DM Slides
Lab2 Done!
I love AWS

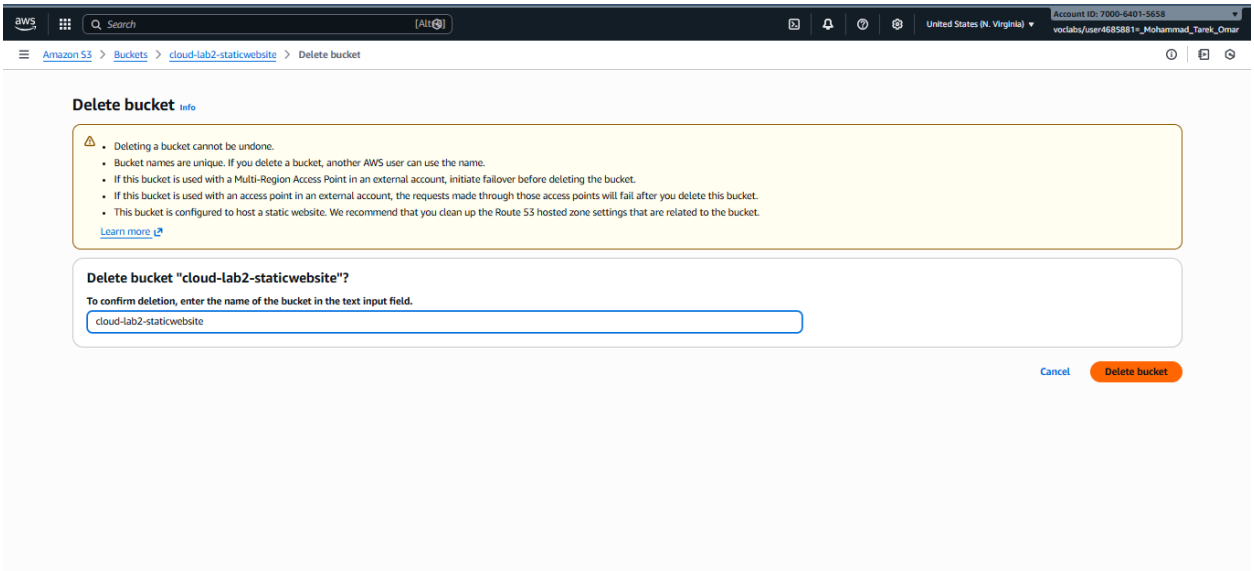
Amazon S3 > Buckets > cloud-lab2-staticwebsite > Delete bucket
Delete bucket Info
Deleting a bucket cannot be undone.
Bucket names are unique. If you delete a bucket, another AWS user can use the name.
If this bucket is used with a Multi-Region Access Point in an external account, initiate failover before deleting the bucket.
If this bucket is used with an access point in an external account, the requests made through those access points will fail after you delete this bucket.
This bucket is configured to host a static website. We recommend that you clean up the Route 53 hosted zone settings that are related to the bucket.
Learn more
Delete bucket "cloud-lab2-staticwebsite"?
To confirm deletion, enter the name of the bucket in the text input field.
cloud-lab2-staticwebsite
Cancel
Delete bucket

Lab2.2

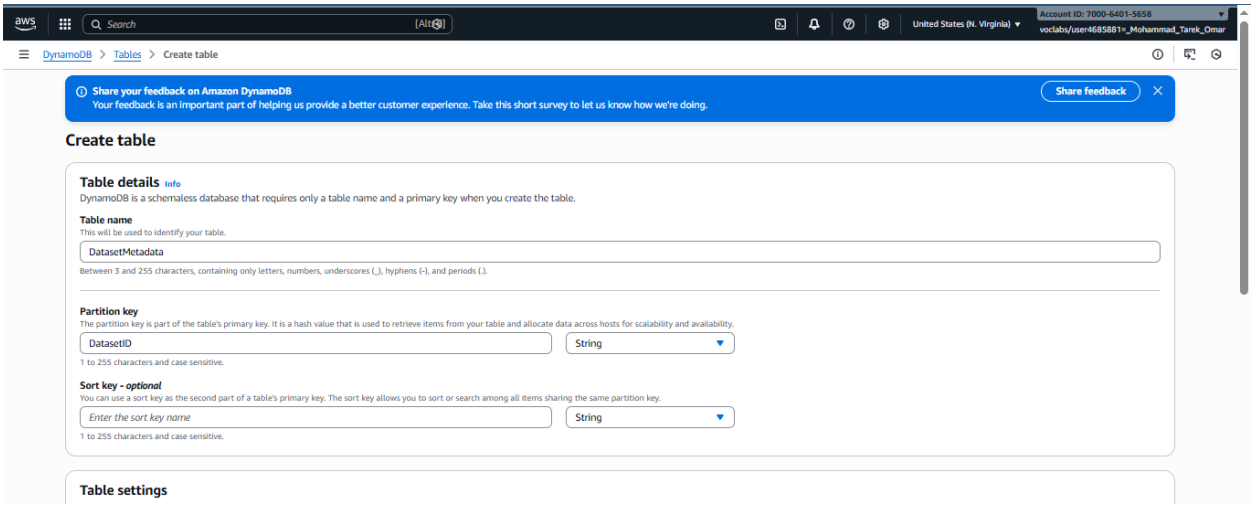
DynamoDB > Tables > Create table
Share your feedback on Amazon DynamoDB
Your feedback is an important part of helping us provide a better customer experience. Take this short survey to let us know how we're doing.
Share feedback
Create table
Table details Info
DynamoDB is a schemaless database that requires only a table name and a primary key when you create the table.
Table name
This will be used to identify your table.
DatasetMetadata
Between 3 and 255 characters, containing only letters, numbers, underscores (_), hyphens (-), and periods (.).
Partition key
The partition key is part of the table's primary key. It is a hash value that is used to retrieve items from your table and allocate data across hosts for scalability and availability.
DatasetID
String
1 to 255 characters and case sensitive.
Sort key - optional
You can use a sort key as the second part of a table's primary key. The sort key allows you to sort or search among all items sharing the same partition key.
Enter the sort key name
String
1 to 255 characters and case sensitive.
Table settings

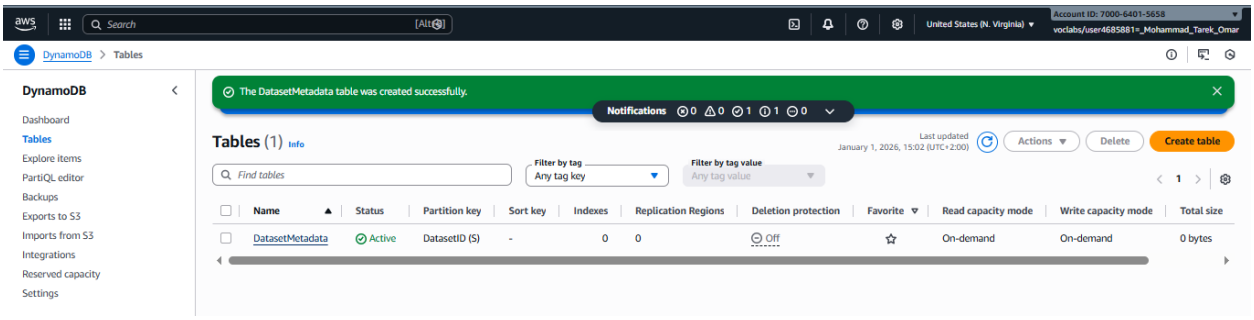
DynamoDB > Tables
DynamoDB
Dashboard
Tables
Explore items
PartiQL editor
Backups
Exports to S3
Imports from S3
Integrations
Reserved capacity
Settings
The DatasetMetadata table was created successfully.
Notifications
Tables (1) Info
Last updated
January 1, 2026, 15:02 (UTC+2:00)
Actions
Delete
Create table
Find tables
Filter by tag
Any tag key
Filter by tag value
Any tag value
Name
Status
Partition key
Sort key
Indexes
Replication Regions
Deletion protection
Favorite
Read capacity mode
Write capacity mode
Total size
DatasetMetadata
Active
DatasetID (S)
-
0
0
Off
On-demand
On-demand
0 bytes

Create item

Form | JSON view

You can add, remove, or edit the attributes of an item. You can nest attributes inside other attributes up to 32 levels deep. Learn more

Attributes

View DynamoDB JSON | Copy

```
1 ▼ {
2     "DatasetID": { "S": "DS001" },
3     "DatasetName": { "S": "Customer_Transactions" },
4     "DataSource": { "S": "S3" },
5     "OwnerTeam": { "S": "DataEngineering" },
6     "UpdateFrequency": { "S": "Daily" },
7     "SchemaVersion": { "S": "v1.0" },
8     "RecordCount": { "N": "1250000" },
9     "LastUpdated": { "S": "2025-01-01T10:30:00Z" },
10    "DataQualityStatus": { "S": "Valid" }
11  }
12
```

JSON Ln 12, Col 1 | Errors: 0 | Warnings: 0

Cancel | Create item

aws | Search [Alt+S] | United States (N. Virginia) | Account ID: 7000-6401-5658 | voclabs/user4685881=_Mohammad_Tarek_Omar
DynamoDB > Explore items: DatasetMetadata > Create item

Create item

Form | JSON view

You can add, remove, or edit the attributes of an item. You can nest attributes inside other attributes up to 32 levels deep. Learn more

Attributes

View DynamoDB JSON | Copy

```
1 ▼ {
2     "DatasetID": { "S": "DS002" },
3     "DatasetName": { "S": "User_Activity_Logs" },
4     "DataSource": { "S": "Logs" },
5     "OwnerTeam": { "S": "Analytics" },
6     "UpdateFrequency": { "S": "Hourly" },
7     "SchemaVersion": { "S": "v2.1" },
8     "RecordCount": { "N": "9800000" },
9     "LastUpdated": { "S": "2025-01-01T11:00:00Z" },
10    "DataQualityStatus": { "S": "Warning" }
11  }
12
```

JSON Ln 12, Col 1 | Errors: 0 | Warnings: 0

Cancel | Create item

aws | Search [Alt+S] | United States (N. Virginia) | Account ID: 7000-6401-5658 | voclabs/user4685881=_Mohammad_Tarek_Omar
DynamoDB > Explore items: DatasetMetadata > Create item

Create item

Form | JSON view

You can add, remove, or edit the attributes of an item. You can nest attributes inside other attributes up to 32 levels deep. Learn more

Attributes

View DynamoDB JSON | Copy

```
1 ▼ {
2     "DatasetID": { "S": "DS003" },
3     "DatasetName": { "S": "Sales_Reporting" },
4     "DataSource": { "S": "RDS" },
5     "OwnerTeam": { "S": "BI" },
6     "UpdateFrequency": { "S": "Weekly" },
7     "SchemaVersion": { "S": "v1.5" },
8     "RecordCount": { "N": "450000" },
9     "LastUpdated": { "S": "2024-12-30T18:15:00Z" },
10    "DataQualityStatus": { "S": "Failed" }
11  }
12
```

JSON Ln 12, Col 1 | Errors: 0 | Warnings: 0

Cancel | Create item

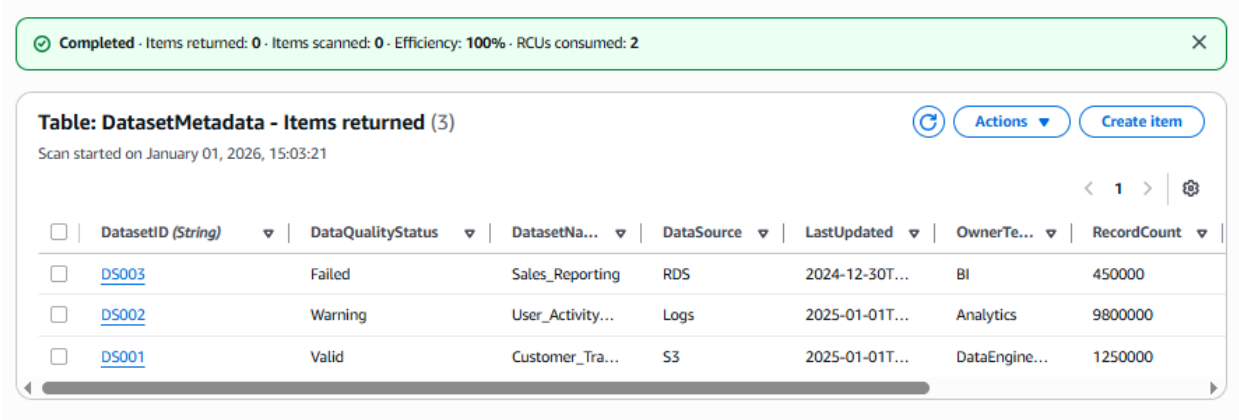

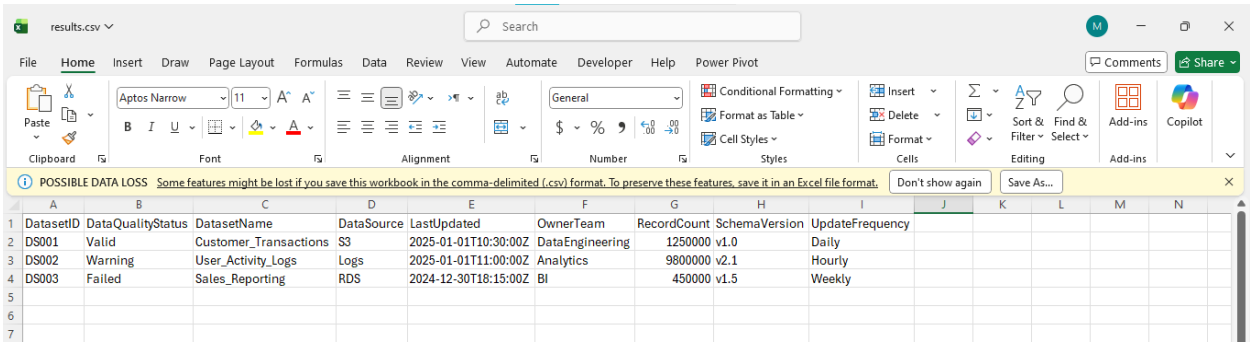

	A	B	C	D	E	F	G	H	I
1	DatasetID	DataQualityStatus	DatasetName	DataSource	LastUpdated	OwnerTeam	RecordCount	SchemaVersion	UpdateFrequency
2	DS001	Valid	Customer_Transactions	S3	2025-01-01T10:30:00Z	DataEngineering	1250000	v1.0	Daily
3	DS002	Warning	User_Activity_Logs	Logs	2025-01-01T11:00:00Z	Analytics	9800000	v2.1	Hourly
4	DS003	Failed	Sales_Reporting	RDS	2024-12-30T18:15:00Z	BI	450000	v1.5	Weekly
5									
6									
7									

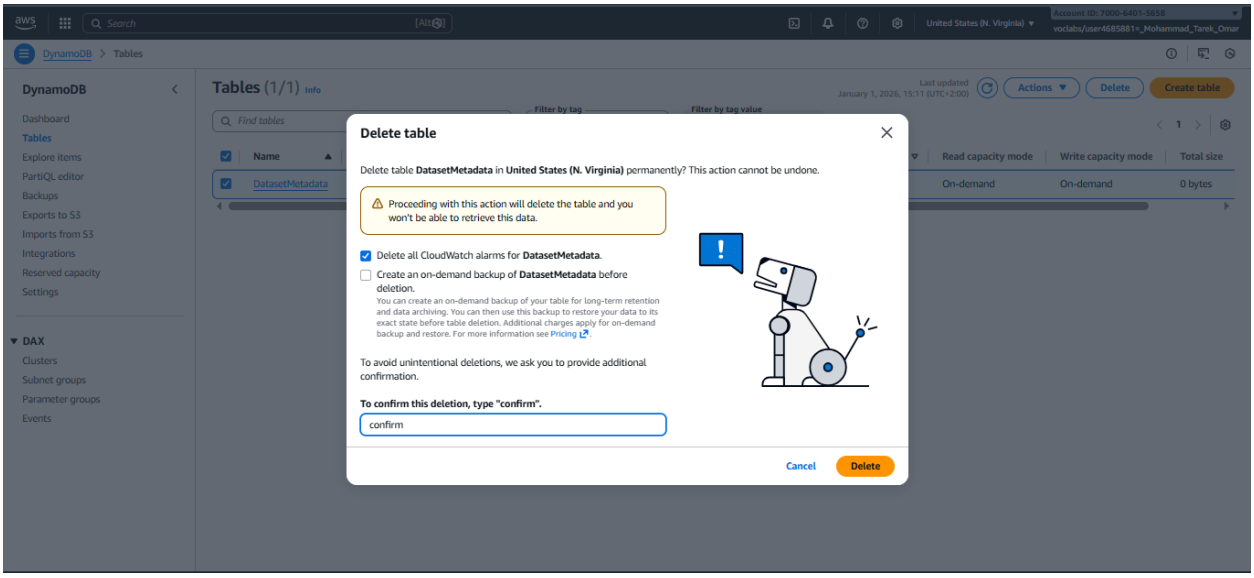
Delete table
Delete table DatasetMetadata in United States (N. Virginia) permanently? This action cannot be undone.
Proceeding with this action will delete the table and you won't be able to retrieve this data.
Delete all CloudWatch alarms for DatasetMetadata.
Create an on-demand backup of DatasetMetadata before deletion.
You can create an on-demand backup of your table for long-term retention and data archiving. You can then use this backup to restore your data to its exact state before table deletion. Additional charges apply for on-demand backup and restore. For more information see Pricing.
To avoid unintentional deletions, we ask you to provide additional confirmation.
To confirm this deletion, type "confirm".
confirm
Cancel
Delete

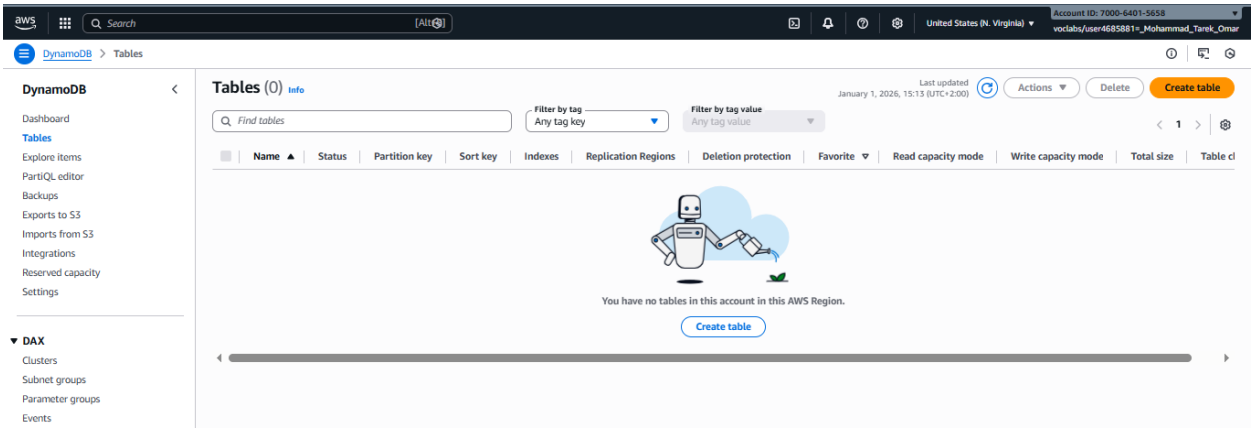
Tables (0)
You have no tables in this account in this AWS Region.
Create table