



Image And Video Retrieval System

Author1

Author2

Author3

Supervisor: Dr.Gamal A. Ebrahim

Department of Computer Systems Engineering

Faculty of Engineering at Ain Shams University

May 2021

Contents

1	Introduction	4
2	Project Description	6
2.1	Detailed project description	6
2.2	Beneficiaries of the project	6
2.3	Detailed analysis	6
2.4	Techniques description	6
2.4.1	Images techniques	6
2.4.2	Videos techniques	8
3	Project planning	10
3.1	Task breakdown structure	10
3.2	Time plan and Gant chart	11
4	System Design And Architecture	12
4.1	System architecture	12
4.2	Multimedia database design	12
4.2.1	The purpose of our data base	12
4.2.2	Required information	12
4.2.3	Database Schema	13
4.2.4	Primary keys and foriegn keys	14
4.3	System design	14
4.4	Testing scenarios and results	14

List of Figures

2.1	example for image histogram	7
2.2	histogram distance equation	7
2.3	color layout distance equation	8
3.1	Tasks break down structure	10
4.1	Data base schema	13

List of Tables

Chapter 1

Introduction

The quantity of virtual content, withinside the shape of snap shots and video, has been growing exponentially in current years. With growing computing strength and digital storage capacity, the capability for big virtual photo/video libraries is developing rapidly. In particular, the World Wide Web has seen an expanded use of virtual snap shots and video, which shape the bottom of many entertainment, educational, and commercial applications. As a result, it has grow to be extra and extra difficult for a consumer to look for the applicable records amongst a big quantity of virtual snap shots or video. Image and video libraries consequently want to offer smooth informational get entry to and the retrieval records ought to be smooth to locate, manipulate and display. As the dimensions of reachable photo and video collections grows to lots of hours, capability visitors will want abstractions and era that assist them browse effectively and efficiently. Text-primarily based totally seek algorithms provide some help in locating precise snap shots or segments amongst big video collections. In maximum cases, however, those systems output many beside the point snap shots or video segments to ensure retrieval of pertinent records. Intelligent indexing systems are crucial for gold standard retrieval of photo and video data. A standard content-primarily based totally photo/video retrieval gadget consists of 3 principal aspects: characteristic extraction, excessive dimensional indexing and gadget layout [24]. Among the 3 aspects, excessive dimensional indexing is vital for speed overall performance; gadget layout is crucial for look overall performance; and characteristic extraction is the important thing to accuracy overall performance. The accuracy overall performance of a retrieval gadget is very subjective and consumer-dependent. To a consumer, the similarity among items is frequently excessive-degree or semantic. However, capabilities we are able to extract from items are frequently low-degree capabilities, as maximum of them are extracted immediately from virtual representations of items withinside the database. The hole among low-degree capabilities and excessive-degree semantics has been the principal impediment to higher retrieval overall performance. In this bankruptcy we discover the today's technology in photo and video retrieval. We describe numerous techniques for extracting capabilities which can

be used to degree photo and video similarity in multimedia databases. We additionally describe strategies to bridge the space among low-degree capabilities and excessive-degree semantics.

Chapter 2

Project Description

2.1 Detailed project description

2.2 Beneficiaries of the project

2.3 Detailed analysis

2.4 Techniques description

2.4.1 Images techniques

Mean color

This technique depends on computing the distance between images based on the color similarity between them. For RGB images the mean color of pixels is computed by finding the average color of the pixels in each channel separately then finding the average between the three values that result from each channel. To get the most similar images to the input image ,the difference between the mean color the input image and each image in the database is computed then we apply a reasonable threshold to exclude the images with large distance.

Mean color is one of the most techniques used in image retrieval systems because it can be completed without regard to image size or orientation and it needs less computational power than other techniques.

Histogram

Histogram search algorithms , characterize an image by its color distribution or histogram. A histogram is nothing but a graph that represents all the colors and the level of their occurrence in an image irrespective of the type of the image.

Few basic properties about an image can be obtained from using a Histogram. It can be used to set a threshold for screening the images. The shape and the concentration of the colors in the histogram will be the same for similar objects even though they are of different colors.

Identifying objects in a grey scale image is the easiest one as the histogram is almost similar as the objects have the same colors for same objects. In order for identifying the objects in the images or generating the histogram the system has to obtain the array values of the frequency of occurrence of each color value -from 0 to 255- in the image.

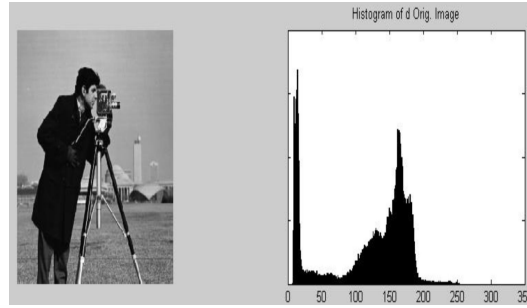


Figure 2.1: example for image histogram

To calculate the distance between two image histogram we calculate the sum of the smallest bin for each corresponding bins in the two histograms for input image I and the model image M normalized to the number of pixels in the model image.

$$\sum_{j=1}^n \frac{\min(I_j, M_j)}{\sum_{j=1}^n M_j}$$

Figure 2.2: histogram distance equation

Color Layout

This technique is similar to histogram based technique except it solves the problem of getting results of images with a low histogram distance value but with a different contents.

In this algorithm we divide each image into 5x5 array of blocks so we get 25 sub-image then we calculate the histogram form each block. To find the distance between to images we get the distance between the histograms of each two corresponding block, then we calculate the total distance by finding the summation of all blocks distance.

$$d_{\text{gridded_square}}(I, Q) = \sum d_{\text{color}}(C^I(g), C^Q(g))$$

Figure 2.3: color layout distance equation

2.4.2 Videos techniques

Feature extraction technique

To make a content based video retrieval system, we have to deal with videos as frames and compare frame with each others as images. But applying this technique would consume a lot of memory to store the whole frame of each video. So the key frames role appear here.

A key frame (or keyframe) in animation and filmmaking is a drawing or shot that defines the starting and ending points of any smooth transition. These are called frames because their position in time is measured in frames on a strip of film or on a digital video editing timeline.

So we make a key frame extraction operation for each video before inserting it to the database. then we deal with key frames as the same manners of images, We caculate the histogram for each key frame and divide the range into five regions then we get the averge of each region resulting the five values that we store in the data base, after that we use these values as a initial filtering to get the most similar frames of the input ,then we use the accurate -255 values-histogram to make a second step filtering.

Distance calculation

To get the distance between two videos we use the naive video similarity technique. In this technique we calculate how many key frames in the query video is similar to one or more key frame in the model video, then we calculate the ration between these key frames to the total number of the key frames, after

that we compare the distance with a threshold value and if the distance is lower than this threshold, the two videos are similar otherwise they are not similar.

Chapter 3

Project planning

3.1 Task breakdown structure

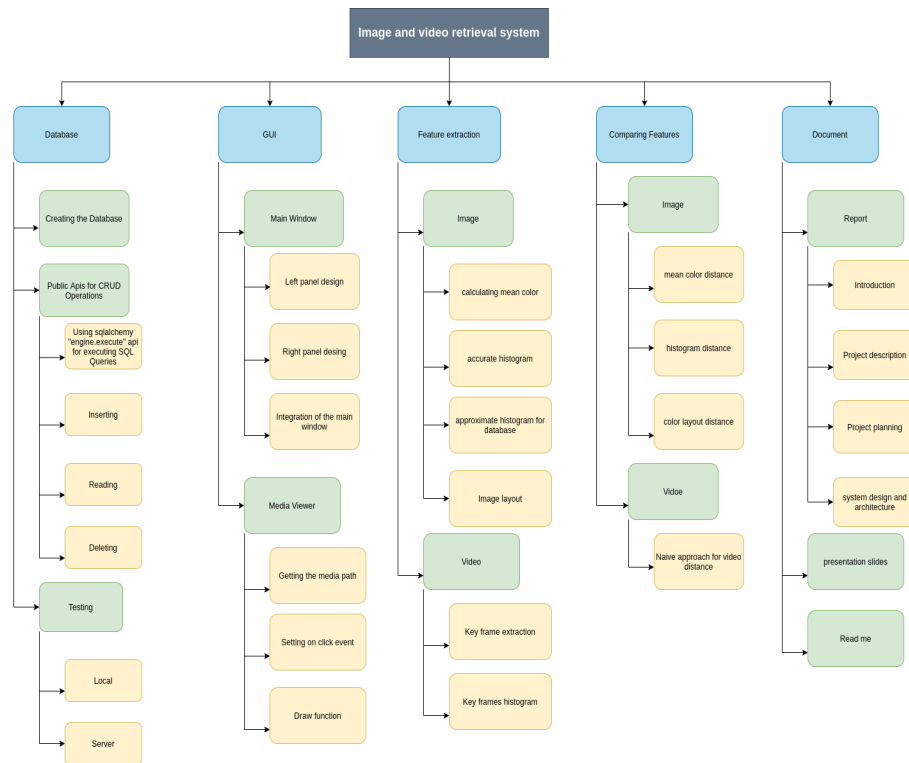


Figure 3.1: Tasks break down structure

3.2 Time plan and Gant chart

Chapter 4

System Design And Architecture

4.1 System architecture

4.2 Multimedia database design

4.2.1 The purpose of our data base

The purpose of our data base is to work as images and videos search engine server. This is achieved by storing images and videos with their pre computed extracted features then takes a an image or video as input form the user and query the data base storge based on the extracted features of the input material and outputs the most relevant matrial to the input model.

The project database supports three filter techniques for images retrieval operation which are mean color, histogram, and color layout and one technique for video retrieval operation base on histogram of the key frames.

4.2.2 Required information

To achieve the required techniques, we need our database to hold some information about each stored element.

1. Images features

- We store the mean color value for each image. Mean color is calculated by finding the average of the pixels values for each channle separatley, then finding the averge between the three values resulting from each channel.
- Histogram information is needed to be stored, but if we store the whole 255 values of each histogram ,we will consume huge amount of

storage. The solution we have used is to divide the histogram into five regions and get the average of each region so we convert the 255 values into 5 values only and store them in the database. we need these five values for only first step in filtering and then we compare using the complete histogram -255 values- for the filtered images.

2. Video features

- Instead of storing the whole video frames we only store the information about the key frames of the video. Each key frame is related to its video through "ID", then we deal with key frames in the same manner of the images so we store five values for the histogram of each key frame.

4.2.3 Database Schema

The data base consists of three main tables :

- The first tables is "Image" which holds the information for each image.
- The second is "Video" which holds only the ID and Path of each video.
- The third table is "Key Frame". this table holds all the key frames of all stored videos and relate each key fram to its video using the video ID.

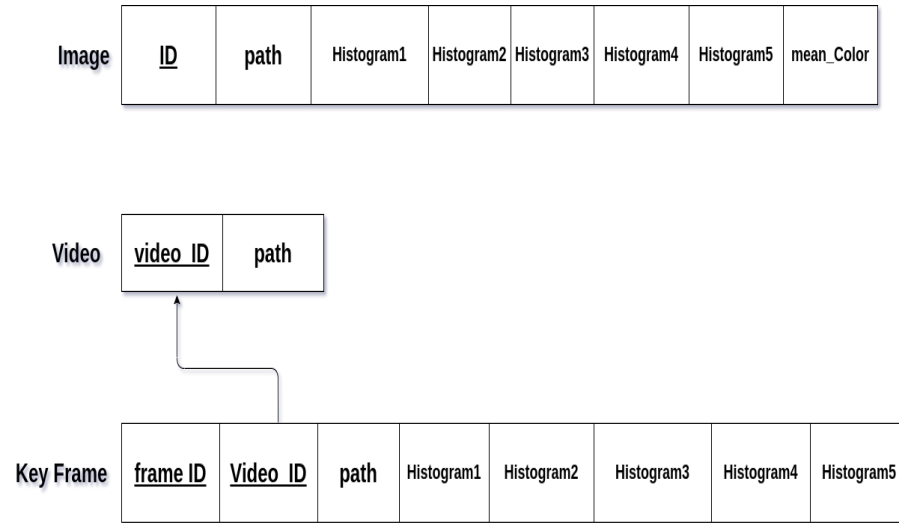


Figure 4.1: Data base schema

4.2.4 Primary keys and foriegn keys

- Primary keys of each table are:
 1. Image table Primary key is the Id of each image.
 2. Video table Primary key is the Id of each video.
 3. Key frame table Primary key is a composite key from the id of each key frame and the id of the refered video.
- Foriegn keys used are:
 - Key frame table has the referenced video id as a foriegn key which relates each key frame to its original video.

4.3 System design

4.4 Testing scenarios and results