

1.

A.

What is CSS?

* CSS is a style sheet language used to control the appearance & layout of HTML elements.

* HTML creates structure of a webpage, while CSS makes the webpage look good, responsive & attractive.

* The full form of CSS is Cascading Style Sheets.

2.

A.

What is Cascading in CSS?

* It means flowing down according to priority.

* When multiple CSS target same element, browser decides which rule should be applied based on CSS.

Eg:

```
h1 { color: red; }
```

```
h1 { color: blue; }
```

→ last rule priority.

output: Blue.

3. Diff btw Canadizing & specificity,

A- i) Cascading :

* It is a process of browser uses to decide which CSS rule to apply when multiple rules applies to same element

* So it uses a priority rule like last one wins.

ii) Specificity:

* It is a scoring system that determines which selector is stronger.

1. Inline CSS
2. ID selector
3. class, Attribute
4. Element Selector

4. 3 types of CSS.

- i) Inline CSS — written inside the HTML element
- ii) Internal CSS — written inside style tag
- iii) External CSS — written in a separate .css file.

Ex: Inline CSS: `<h1 style = "color : red;" > Hello </h1>`

Internalex: `< style`
`hl {`
`color: blue;`
`}`
`</style>`

External css: `<link rel="stylesheet" href="style.css">`
then `h1 { color: green; }`

i) Universal Selector (*)

- * It selects every element
- * It is declared by * symbol.

Eg:

* {

margin: 0;

padding: 0;

}

ii) Element Selector

- * It selects all elements of a particular type

* Eg:

P {

color: red;

}

Here P is the element

So wherever P had contain it will apply the style.

iii) Class Selector (.)

- * In class selector, it selects element with a specific class and use class to declare.
- * It uses . ("dot") to declare a class element

Eg:

.box {

background: blue;

In html, <div class="box">

iv) ID selector:

- * It selects only one unique element.
- * In html, we should declare a Id and a unique name to it.
- * "#" symbol is used to call the Id selector in CSS.

Eg: # box {
background: blue;
}

In html,
<div Id: "box">

v) Group selector: (,)

- * Here, it is used to apply multiple or same style to multiple elements.
- * It uses (" , ") comma to call the elements.

Eg: h2, h4 {
color: red;
}

vi) Descendant selector: (space)

- * It targets children inside the another element.
- * It uses space btw. the class & element.

Eg: . box h2 {
color: green;
}

vii) Child Selector (>)

- * It selects only the direct child.
- * It uses ">" symbol to target the child.

Eg: .box > p
 {
 color: red
 }

Diff b/w class & ID selector:

Class Selector	ID Selector
It uses dot to call element	It uses # hashtag to call element
It can be used multiple times in a page.	It should be unique on a page
It can be Re-usable	It is not Reusable.
Eg: .box { color: red }	Eg: #Body { color: red }


7. Diff btw

Sl. No	Descendant	child
i)	It selects all matching descendant.	It only selects a direct children not every child.
ii)	Eg: <pre>container p { color: blue; }</pre>	Eg: <pre>container > p { color: red; }</pre>

8. Explain Box Model:

* Every HTML element is treated as a rectangular box.

+ There are 4 parts :-

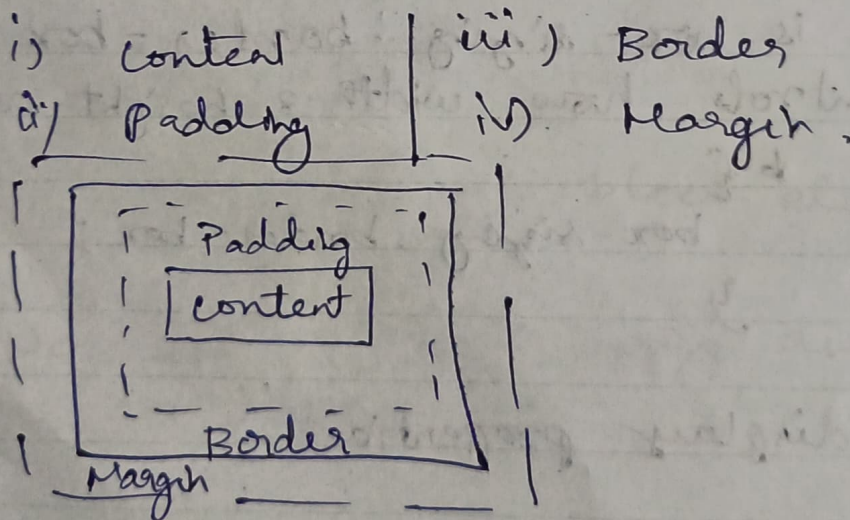

9: Diff btw padding & Margin.

padding	margin
Space inside the border is called as "padding".	ii) Space outside the border is called as "Margin".
It increases element size.	It creates space between elements.
Bg color extends into padding.	Bg doesn't extend into margin.

What is box-sizing: border-box?

It controls how width & height are calculated.

Eg: `div`

```

box-sizing: border-box;

```

Diff display properties:

- i) Block
- ii) Inline
- iii) Inline-Block.

i) Block:

- * It always starts on a new line.
- * It takes full available width.
- * width & height can be applied.

Eg: div, p, h1 are block level.

ii) Inline:

- * It doesn't start on a new line.
- * It takes only Required width.
- * we cannot apply width & height.

Eg: span, a.

iii) Inline-block:

- * It appears like a Inline
- * But we can apply width & height.

12. Can we apply width & height to ~~div~~.

i) Div:

Yes, Because it is a block element.

ii) Span:

No, but if we apply display: inline-block we can apply.

iii) Button:

Buttons are inline block by default. so we can do it.

13. Diff b/w display: none & visibility: hidden;

A.

Display: none

- * Element is completely removed.
- * Occupies no space.

• box {

display: none;

}

visibility: hidden:

- * Element becomes invisible.
- * Still occupies space.

• box {

visibility: hidden;

}

14: Explain Flexbox.

A. Flexbox is a CSS layout model used to arrange, align & distribute items efficiently in a container.

Flex container: the parent element with display: flex;

Flex Item: The direct children of the flex container.

Main Axis:

The primary direction in which flex items are placed.

Default:

Left → Right.

Controlled by:

Flex-direction.

Cross Axis:

The direction perpendicular to the main axis.

Default:

Top → Bottom.

Controlled by:

- Q. How do you perfectly center a div using flex-align-items.
- A. * with the help of display: flex, justify-content: center & align-items: center; i can perfectly center a div.

Eg:

```
<div class = "box">  
  <div class = "FirstBox"  
    <p> Hello </p>  
  </div>  
</div>
```