Configure RHEL Jenkins Agent SOP

Cognizant

Table of Contents

1. Configure RHEL Jenkins Agent.....3
1.1 Description.....3
1.2 Architecture Diagram.....3
1.3 Lab Steps.....4
Pre Requisites:.....4
1.4 Supporting References.....6

1. Configure RHEL Jenkins Agent

1.1 Description

In this lab exercise we will configure the RHEL Server agent as node to the Master Jenkins.

1.2 Architecture Diagram

The diagram below displays a visual representation of the underlying application architecture:

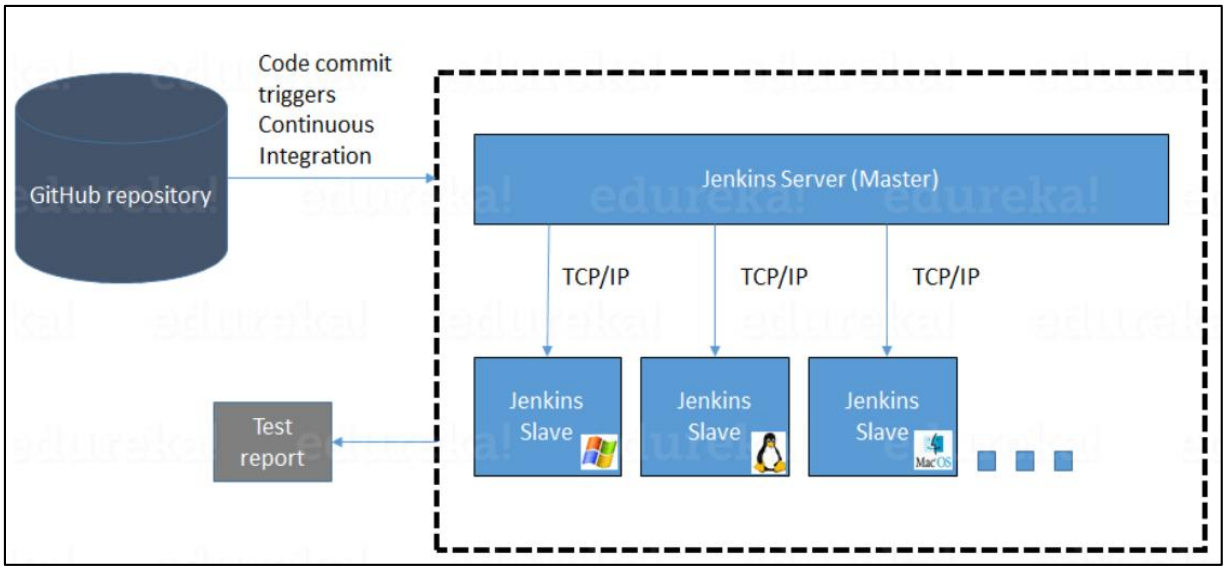

1.3 Lab Steps

Pre Requisites:

- Rhel server (Rhel Version 6 or 7)
- Jenkins is installed on Rhel server and URL is up and running.
- JDK 1.8 + should already be installed on Jenkins master and Rhel agent

Follow the steps outlined below to achieve the objectives of this lab exercise:

1. RHEL Server Agent:
    a. Log in to Jenkins as an admin.
    b. Click on **Manage Jenkins** > **Manage Nodes** as shown in the following screenshot:

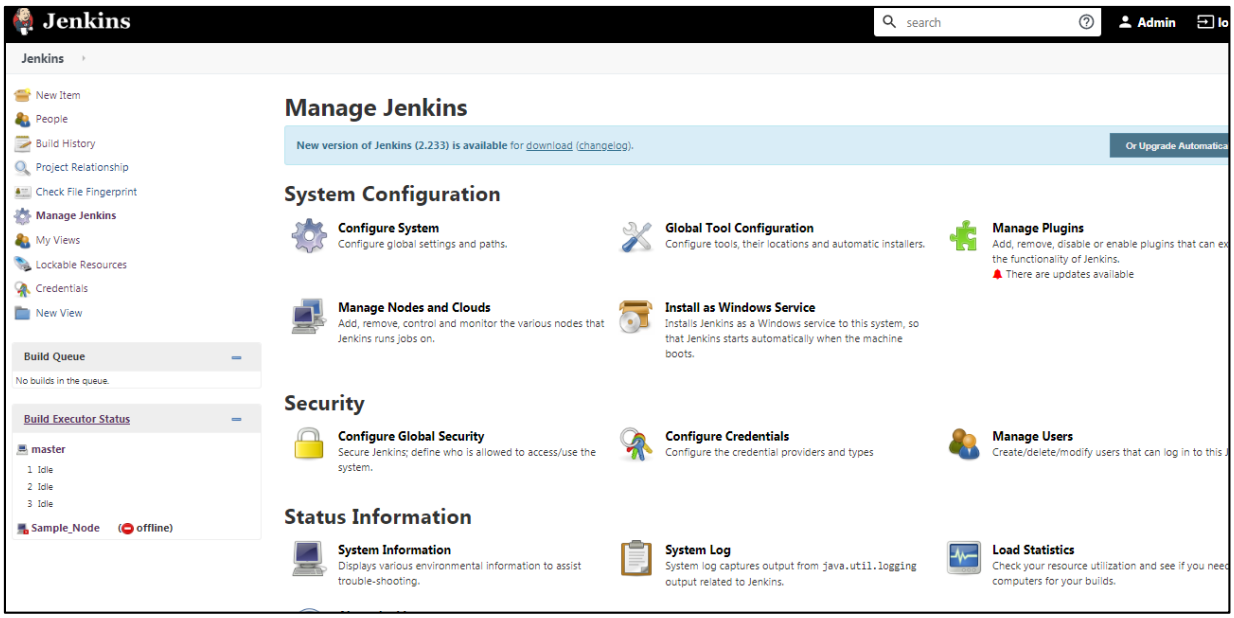

    c. Click on **New node** and select **Permanent Agent**. Provide a Name for the Agent as shown below:

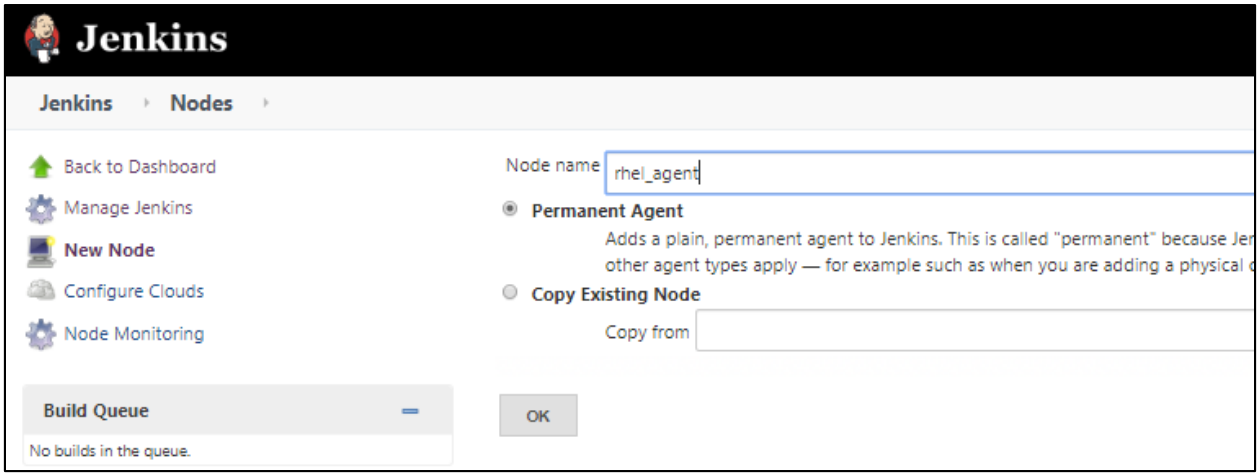

d. In the resultant window provide the details as shown below:
   - **Number of Executors**: Update it according the project requirement and also capacity of the server. This number means how many jobs can run parallel
   - **Remote root directory**: Path where the Jenkins Workspace will be checked out
   - **Labels**: Identifier which will be used in Job while running it against any node
   - **Launch Method**: Launch via SSH
   - **Host**: Server Name
   - **Credentials**: User name and password to connect to the server
   - **Host Key Verification Strategy**: Manually trusted Verification Strategy, CONFIGURE need to manually approve/disapprove the remote host key in Jenkins if it has changed. Once approved, the host key will be marked as trusted. The host key received on the initial connection will be automatically trusted
   - **Availability**: This will decide if the node needs to be kept online or can be brought down if not used.

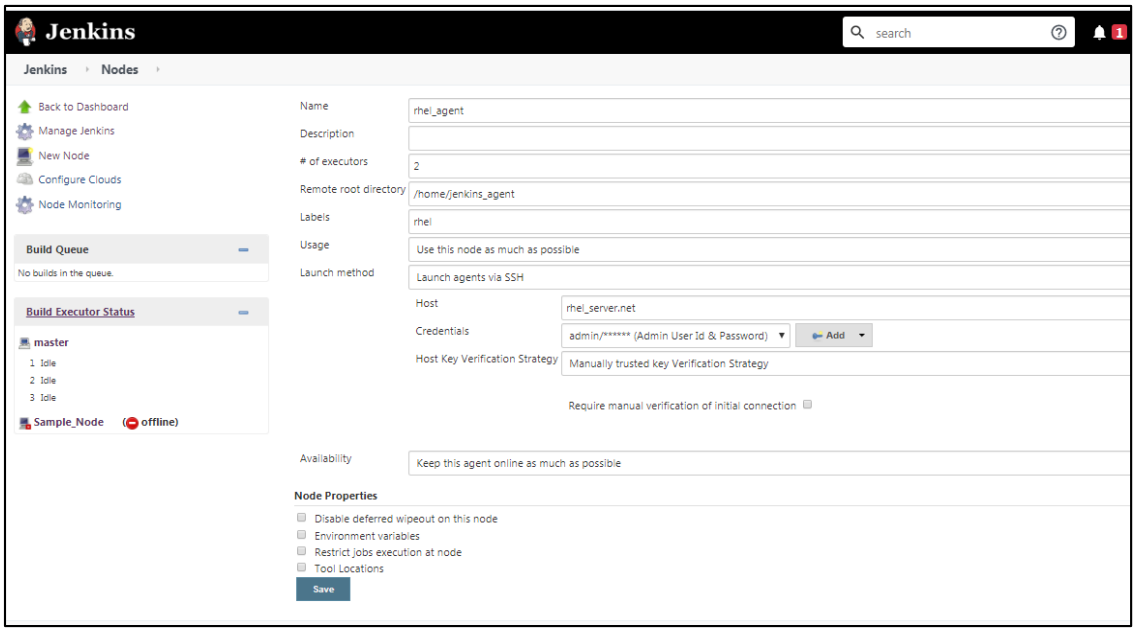

2. Configure SSH between Jenkins Master and Agent:
   a. Follow the steps in the link to create SSH connection between master and agent: https://support.cloudbees.com/hc/en-us/articles/222978868-How-to-Connect-to-Remote-SSH-Agents-
   b. Once this is done, click on **Launch agent** as shown in the following screenshot. The agent will be connected to master if there are no issues in SSH and credentials set up.

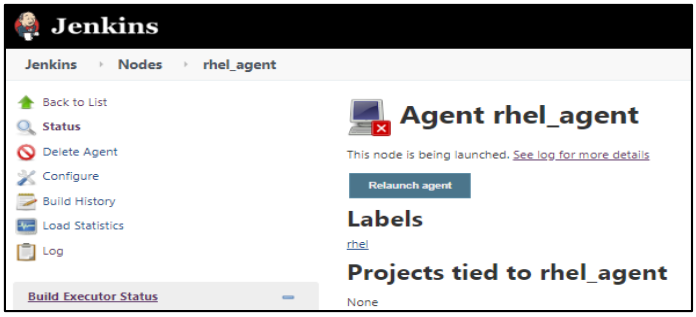

1.4 Supporting References

Refer the below links for additional information:

1. https://support.cloudbees.com/hc/en-us/articles/115003929412-How-to-create-an-agent-in-Linux-from-console
2. https://support.cloudbees.com/hc/en-us/articles/222978868-How-to-Connect-to-Remote-SSH-Agents-