


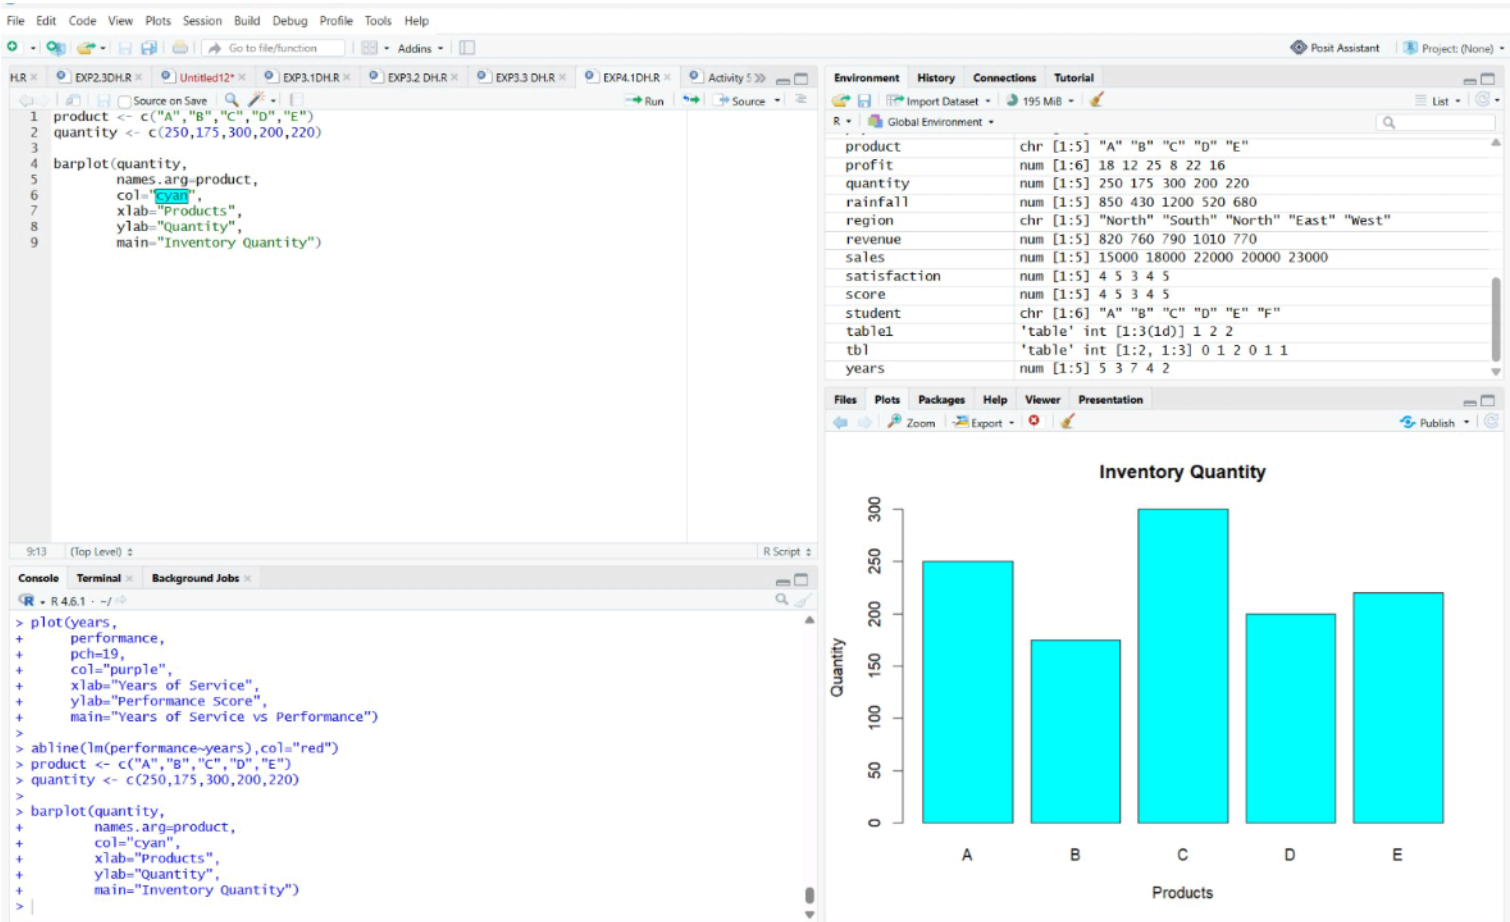

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function

Addins

DH.R

Untitled12*

EXP3.1D.H.R

EXP3.2 D.H.R

EXP3.3 D.H.R

EXP4.1D.H.R

Untitled13*

Activity

Source on Save

Run

Source

```
1 inventory <- matrix(c(120,80,
2                       90,85,
3                       150,150,
4                       110,90,
5                       130,90),
6                       nrow=2)
7
8 barplot(inventory,
9         beside=FALSE,
10        col=c("red", "green"),
11        legend=c("Category 1", "Category 2"),
12        main="Inventory by Category")
```

12:38 (Top Level)

R Script

Console

Terminal

Background Jobs

```
> barplot(quantity,
+         names.arg=product,
+         col="cyan",
+         xlab="Products",
+         ylab="Quantity",
+         main="Inventory Quantity")
> inventory <- matrix(c(120,80,
+                       90,85,
+                       150,150,
+                       110,90,
+                       130,90),
+                       nrow=2)
>
> barplot(inventory,
+         beside=FALSE,
+         col=c("red", "green"),
+         legend=c("Category 1", "Category 2"),
+         main="Inventory by Category")
>
```

