



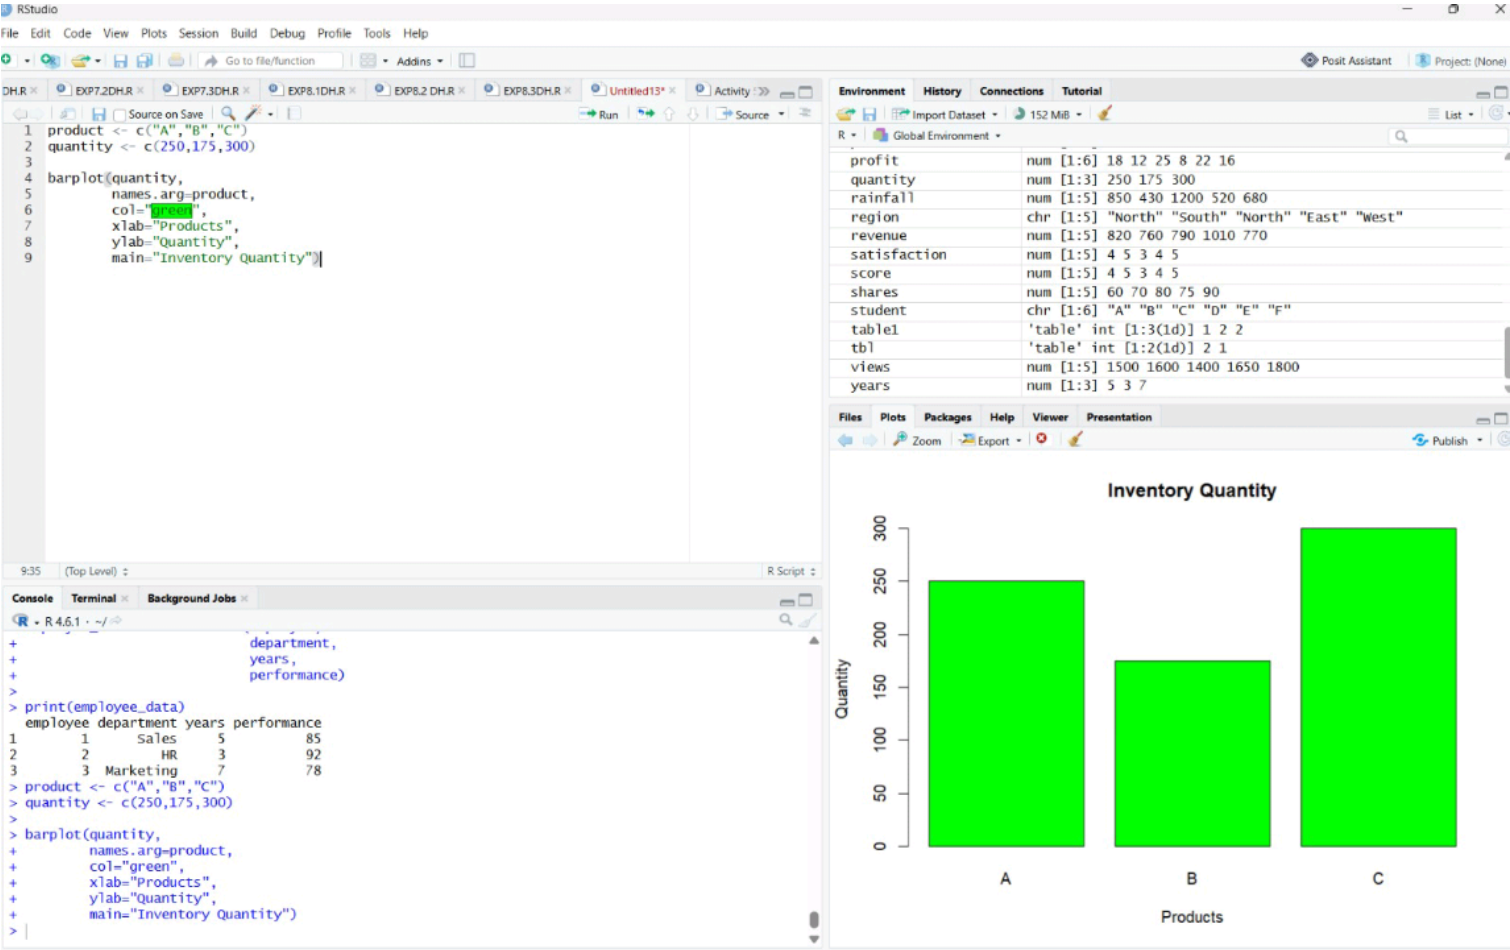

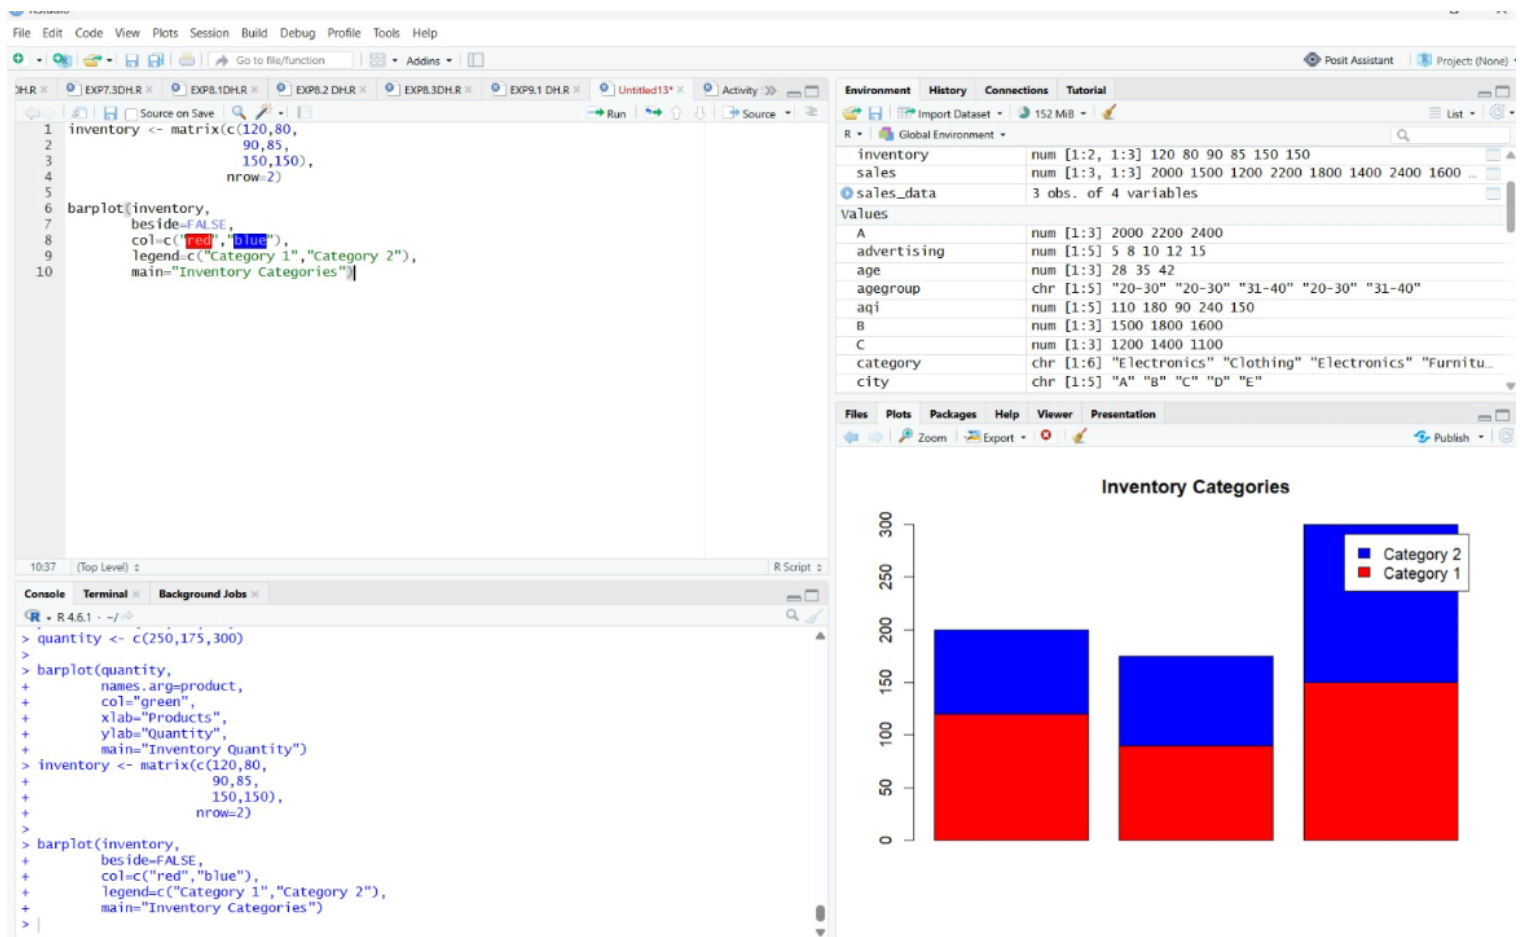

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins

EXP8.1DH.R EXP8.2 DH.R EXP8.3DH.R EXP9.1 DH.R EXP9.2DH.R Untitled13* Activity

Source on Save Run Source

```
1 product <- c("A","B","C")
2 quantity <- c(250,175,300)
3 price <- c(20,15,18)
4
5 inventory_data <- data.frame(product,
6                               quantity,
7                               price)
8
9 print(inventory_data)
```

7:36 (Top Level) R Script

Console Terminal Background Jobs

R 4.6.1 ~/

```
> barplot(inventory,
+         beside=FALSE,
+         col=c("red","blue"),
+         legend=c("Category 1","Category 2"),
+         main="Inventory Categories")
> product <- c("A","B","C")
> quantity <- c(250,175,300)
> price <- c(20,15,18)
>
> inventory_data <- data.frame(product,
+                               quantity,
+                               price)
>
> print(inventory_data)
  product quantity price
1      A      250     20
2      B      175     15
3      C      300     18
> |
```