97.1
Pass

Kumar Chawhan

PDF generated at: 16 Feb 2026 07:25:52 UTC

View this report on HackerRank

Score

97.1% • 170.0 / 175
scored in eClerx - Java Coding Test - 3+ Years New in 47 min 51 sec on 16 Feb 2026 12:05:55 IST

Candidate Information

Email	kumarchawhan53@gmail.com
Test	eClerx - Java Coding Test - 3+ Years New
Candidate Packet	View
Taken on	16 Feb 2026 12:05:55 IST
Time taken	47 min 51 sec/ 90 min
Work Experience	3 years
Invited by	Kalyani
Invited on	12 Feb 2026 19:24:08 IST

Suspicious Activity detected

Coding patterns, Code similarity

Coding patterns • 1 question

Code similarity • 1 question

Skill Distribution

No.	Skill	Score
1	Spring Boot Advanced	75%
2	Spring Boot Intermediate	100%
3	Problem Solving Intermediate	100%
4	Java Intermediate	100%

Tags Distribution

Spring Boot	75%	Hard	75%
TDD	50%	Medium	100%
Spring	100%	Graphs	100%
Greedy	100%	Java	100%

Questions

Spring Boot (Advanced) • 20 / 25

No.	Question	Skill	Score	Code Quality	Time Taken	Status

1	Specification Multiple Choice	Spring Boot (Advanced)	5/5	-	50 sec	✓
2	Cracker Multiple Choice	Spring Boot (Advanced)	5/5	-	2 min 6 sec	✓
3	Output Multiple Choice	Spring Boot (Advanced)	0/5	-	2 min	✗
4	Response Multiple Choice	Spring Boot (Advanced)	5/5	-	4 min 32 sec	✓
5	Spring Scopes Multiple Choice	Spring Boot (Intermediate)	5/5	-	57 sec	✓

Problem Solving (Intermediate) • 75 / 75

No.	Question	Skill	Score	Code Quality	Time Taken	Status
6	Minimize Path Value Coding	Problem Solving (Intermediate)	75/75	-	25 min 36 sec	✓

Java (Intermediate) • 75 / 75

No.	Question	Skill	Score	Code Quality	Time Taken	Status

7	Java: Optimized Sequential Video Watching Coding	Java (Intermediate)	75/75	-	10 min 45 sec	✓

1. Specification

✓ Correct

Multiple Choice | Spring Boot | Hard

Question description

Which of the following options can be used for dynamic jpa queries with spring-data-jpa repositories?

Candidate's Solution

Options: (Expected answer indicated with a tick)

- ○ PreparedStatement
- ● **Specification** ✓
- ○ Criteria
- ○ Query

No comments.

2. Cracker

Correct

Multiple Choice | Spring Boot | Hard

Question description

Cracker.java

```
@Component
public class Cracker {
   public void startCracking(){
      System.out.println("Cracking...");
   }
   public void stopCracking(){
      System.out.println("Cracking Stopped!");
   }
}
```

CrackerService.java

```
@Service
public class CrackerService {

   @Autowired
   Cracker cracker;
   public void workWithNewCracker() {
      cracker.stopCracking();
      cracker = new Cracker();
   }
   public void startWorking() {
      cracker.startCracking();
   }
}
```

CrackerWorker.java

```
@Service
public class CrackerWorker {

   @Autowired
   CrackerService crackerService;

   public void startWorking() {
      crackerService.startWorking();
```

```
        crackerService.workWithNewCracker();
        crackerService = new CrackerService();
        crackerService.startWorking();
    }
}
```

Consider these classes are managed in Spring Boot. What happens when 'crackerWorker.startWorking()' is called in the Spring context?

Interviewer guidelines

CrackerService in CrackerWorker will work perfectly until it's replaced with new CrackerService. When that happens it just replace existing injected bean with empty pojo. Which doesn't have it's cracker object so when it's startWorking method is called it will try to execute null cracker attributes startWorking method and NullPointerException will arise.

Candidate's Solution

Options: (Expected answer indicated with a tick)

- ○ "Cracking..." "Cracking Stopped!" will be written to console
- ○ "Cracking..." "Cracking Stopped!" "Cracking..." will be written to console
- ● **"Cracking..." "Cracking Stopped!" NullPointerException will be thrown** ✓
- ○ None of above

No comments.

3. Output

Incorrect

Multiple Choice | Hard | Spring Boot | TDD

Question description

What will happen to the output file?

```
@SpringBootTest
public class LogTest
{
   File log;
   FileWriter logWriter;

   @Autowired
   SomeClassToTest someClassToTest;

   @Before
   public void init()
   {
     log = new File("log.txt");
     logWriter = new FileWriter(log);
   }

   @After
   public void teardown()
   {
      log.delete();
   }

   @Test
   public void test1()
   {
      logWriter.write("Entered Test 1");
      assertTrue(someClassToTest.someMethod());
   }

   @Test
```

```
    public void test2()
    {
        logWriter.write("Entered Test 2");
        assertTrue(someClassToTest.otherMethod());
    }
}
```

Candidate's Solution

Options: (Expected answer indicated with a tick)

- ○ The output file is not created.
- ● **The output file is created but not deleted.**
- ○ The output file is created and eventually deleted. ✓
- ○ The create and delete blocks will not be executed.

No comments.

4. Response

Correct

Multiple Choice | Hard | Spring Boot | TDD

Question description

Which response will cause the following test case to fail?

```
@Test
   @DisplayName("Filter Price Check 3")
   public void FilterPriceCheck3() throws Exception {
      mockMvc.perform(get("/filter/price/150/500"))
            .andDo(print())
            .andExpect(jsonPath("$[*].product", containsInAnyOrder("Product 1", "Product 2" , "Produc
t 5")))
   }
```

Candidate's Solution

Options: (Expected answer indicated with a tick)

- [ ] [{"product" : "Product 5"} , {"product" : "Product 1"}, {"product" : "Product 2"}]
- [ ] [{"product" : "Product 5"} , {"product" : "Product 2"}, {"product" : "Product 1"}]
- [ ] [{"product" : "Product 1"} , {"product" : "Product 2"}, {"product" : "Product 5"}]
- [x] **[{"product" : "product 5"} , {"product" : "product 2"}, {"product" : "product 1"}]**

No comments.

5. Spring Scopes

Correct

Multiple Choice | Medium | Spring

Question description

Which of the following statements is/are true about @Scope("request") and @Scope("prototype") annotations?

Candidate's Solution

Options: (Expected answer indicated with a tick)

- [x] Both are used to define the scope of spring beans.
- [x] @Scope("request") creates a bean instance for a single HTTP request.
- [x] @RequestScope can be used instead of @Scope("request").
- [x] @Scope("prototype") will return a different instance every time it is requested from the container.

No comments.

6. Minimize Path Value

Correct

Coding | Graphs | Medium

Question description

You have a weighted undirected graph with *graph_nodes* nodes and *m* edges. The stress level of a path between two nodes is defined as the weight of the heaviest edge in that path.

Given a source node *source* and a destination node *destination*, find the minimum possible stress level of a path. If no such path exists, return -1.

Example

Consider the following example below, where *source=1* and *destination=3.*

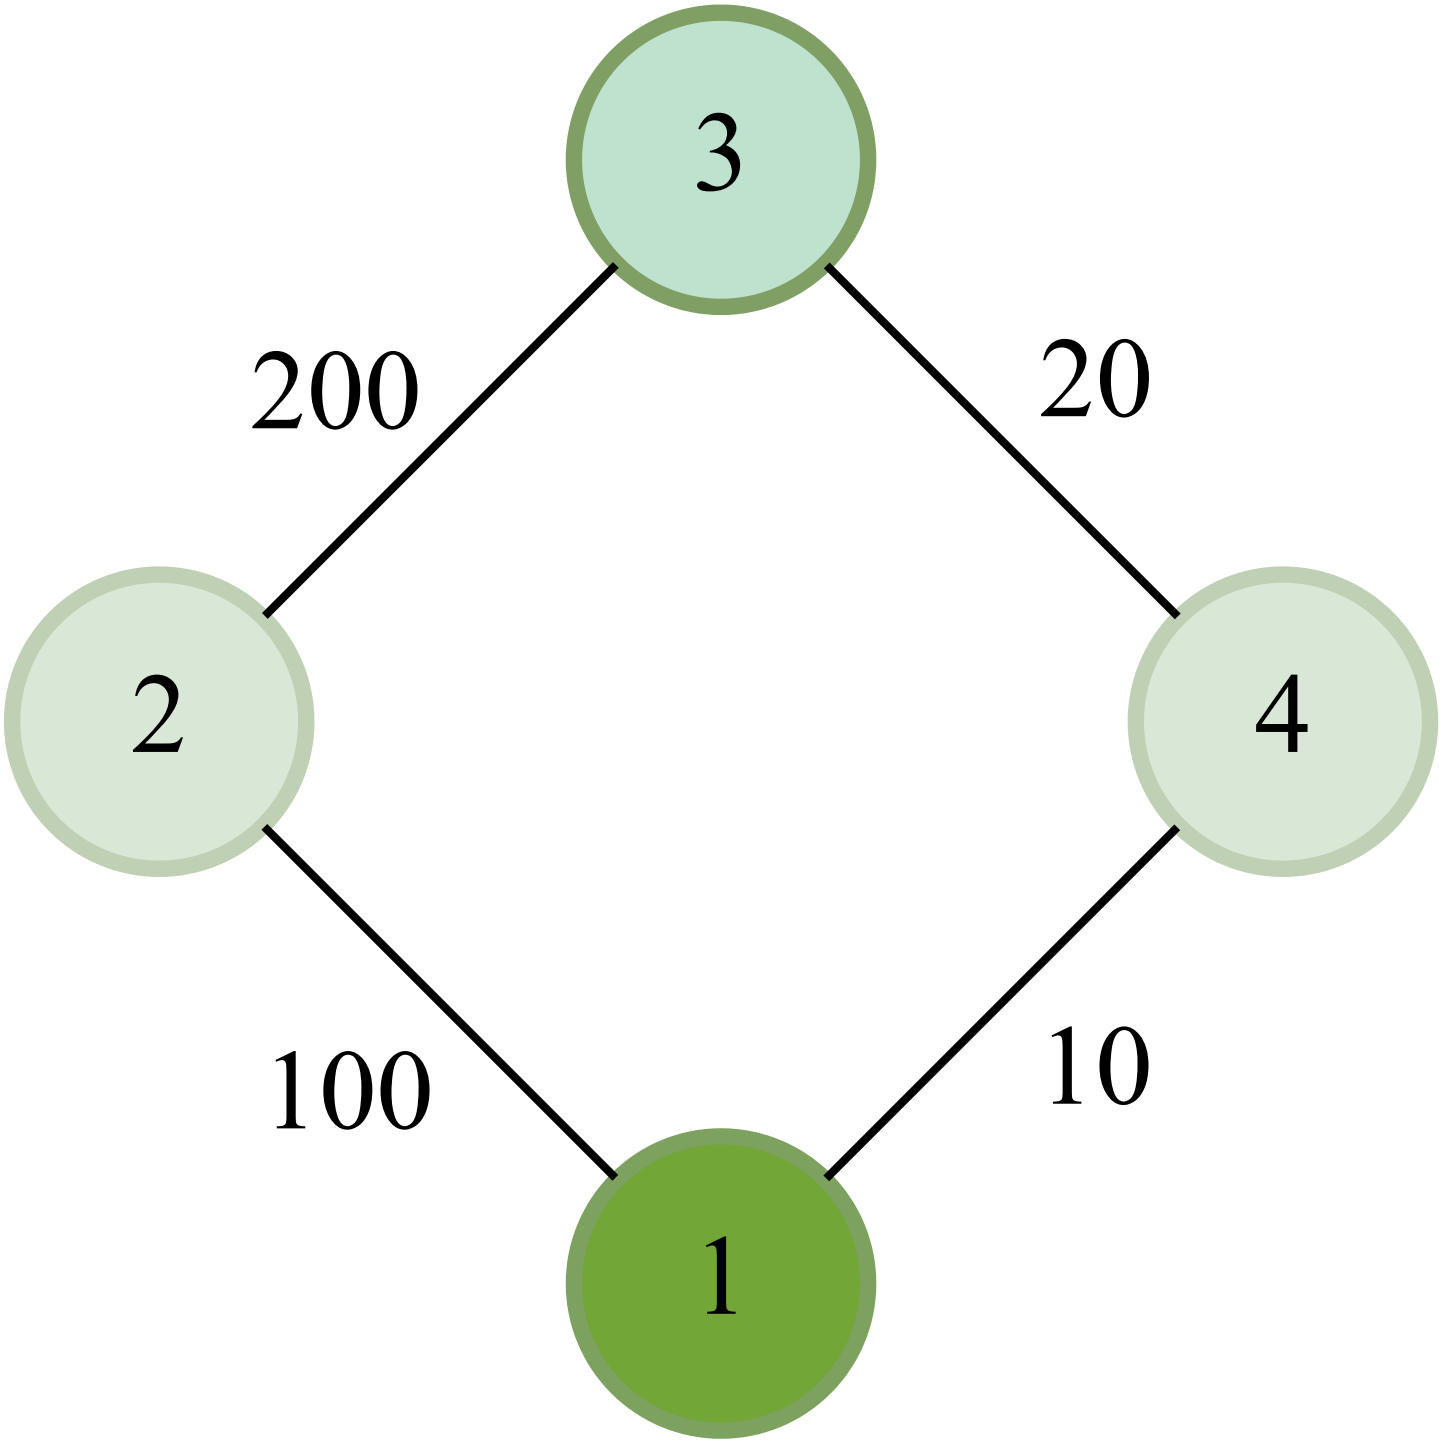

There are two paths, from node 1 to node 3.

1. The max weighted edge/stress level in path 1 -> 2 -> 3 is 200.
2. The max weighted edge/stress level in the path 1 -> 4 -> 3 is 20.

Return 20, the lower stress level from the second path.

Function Description

Complete the function *getMinimumStress* in the editor with the following parameter(s):

int graph_nodes: number of nodes
int graph_from[m]: one end node for an edge
int graph_to[m]: one end node for an edge
int graph_weight[m]: the weights of the edges
int source: the source node
int destination: the destination node

Returns

int: the value of the least stressful path, or -1 if no path exists

Note: Even though edge endpoints are called *graph_from[i]* and *graph_to[i]*, this is an undirected graph.

Constraints

- $1 \le graph_nodes \le 10^5$
- $1 \le |graph_from| = |graph_to| = |graph_weight| \le 10^5$ *(Where |A| denotes the size of array A)*
- $1 \le graph_from[i], graph_to[i], source, destination \le graph_nodes$
- $0 \le graph_weight[i] \le 10^9$

▼ INPUT FORMAT FOR CUSTOM TESTING

The first line contains two space-separated integers *graph_nodes* and *m,* the number of nodes, and the number of edges of the graph.
Each of the following *m* lines contains three space-separated integers *u, v,* and *w,* meaning there is an edge connecting the nodes *u* and *v* of weight *w.*
The next line contains a single integer, denoting the index of the "*source*" node.
The next line contains a single integer, denoting the index of the "*destination*" node.

▼ SAMPLE CASE 0

Sample Input For Custom Testing

```
STDIN       FUNCTION
-----       --------
5 6         graph_nodes = 5, m = 6
1 2 10      u = 1, v = 2, w = 10
```

```
2 3 5
1 4 3
4 3 2
1 5 4
5 3 6
1          source = 1
3          destination = 3
```

Sample Output

```
3
```

Explanation

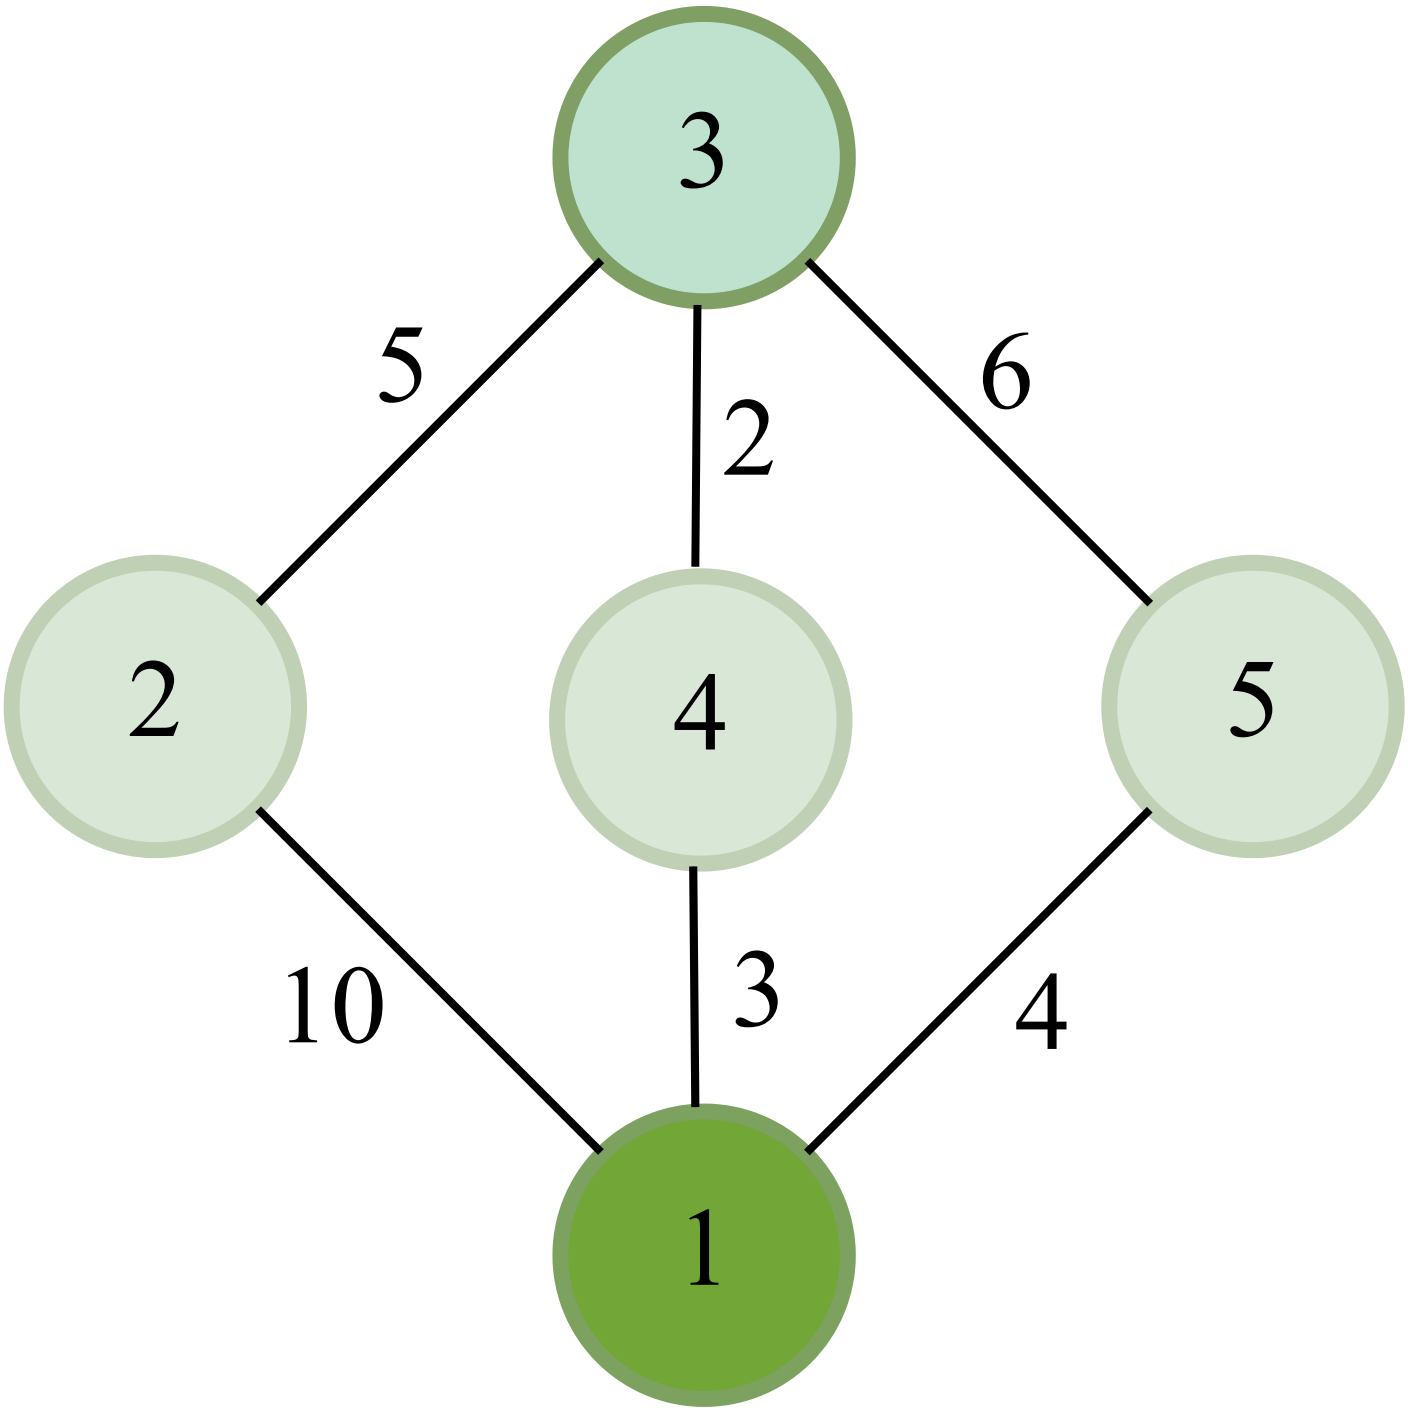

There are three paths, from node 1 to node 3 :

1. 1 -> 2 -> 3. Edges have weights 10 and 5, the maximum weighted edge, and the stress level is 10.
2. 1 -> 4 -> 3. Edges have weights 3 and 2, and the stress level = 3.
3. 1 -> 5 -> 3. Edges have weights 4 and 6, and the stress level = 6.

▼ SAMPLE CASE 1

Sample Input For Custom Testing

```
STDIN       FUNCTION
-----       --------
3 1         graph_nodes = 3, m = 1
1 2 10      a = 1, b = 2, w = 10
1           source = 1
3           destination = 3
```

Sample Output

```
-1
```

Explanation

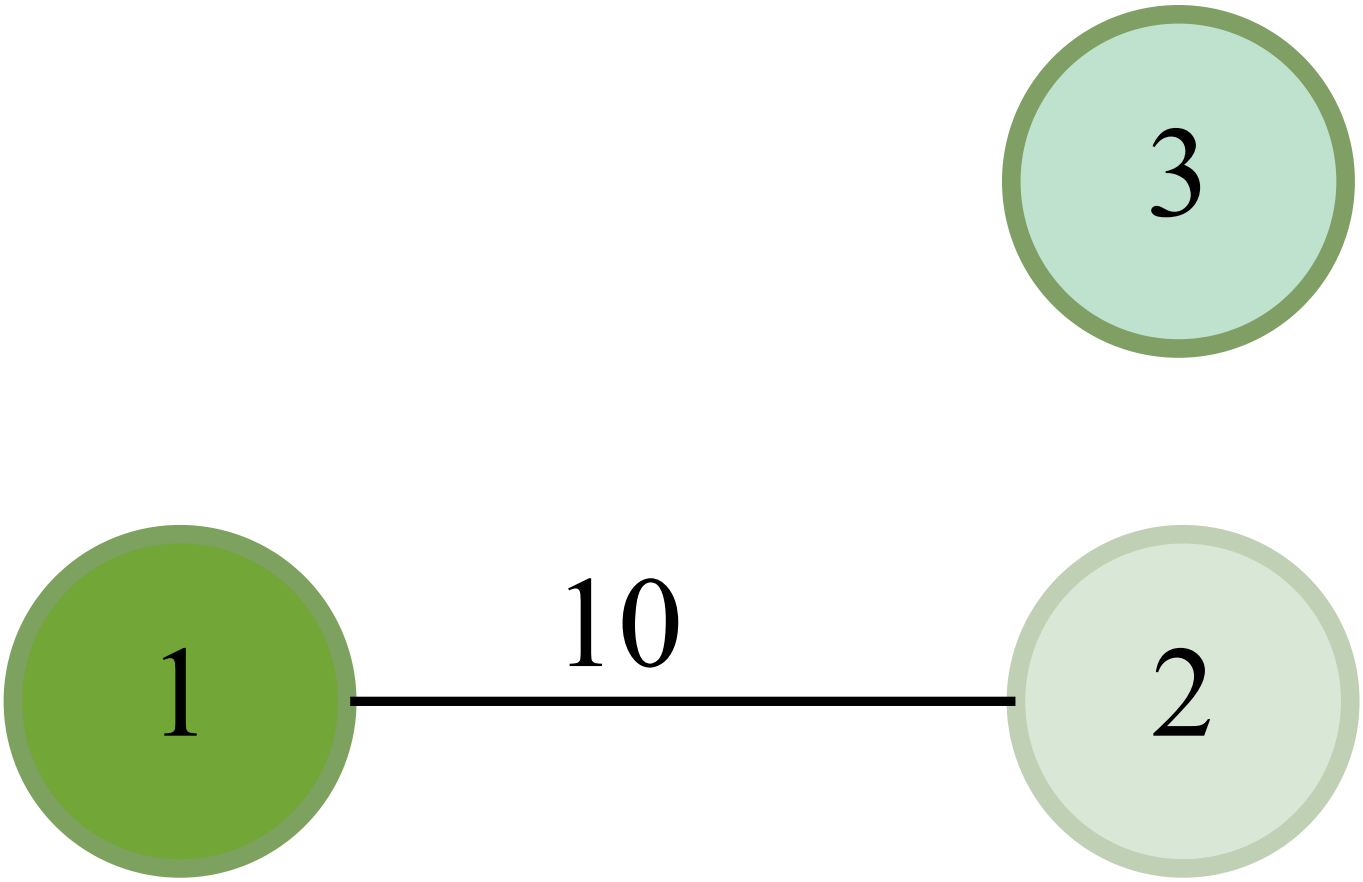

There is no path, from node 1 to node 3.

Interviewer guidelines

▼ SOLUTION

Python Solution

```
sys.setrecursionlimit(10**5)


def getMinimumStress(graph_nodes, graph_from, graph_to, graph_weight, source, destination):

    adj = [[] for i in range(graph_nodes + 1)]
    vis = [False] * (graph_nodes + 1)

    for x, y, w in zip(graph_from, graph_to, graph_weight):
        adj[x].append((y, w))
        adj[y].append((x, w))

    def dfs(node, mx):
        vis[node] = True
        if node == destination:
            return True
        ans = False
        for i, w in adj[node]:
            if w <= mx and not vis[i]:
                ans |= dfs(i, mx)
        return ans

    if not dfs(source, max(graph_weight)):
        return -1

    lo, hi = 0, max(graph_weight)
    while hi - lo > 1:
        vis = [False] * (graph_nodes + 1)
        mid = (hi + lo) // 2
        if dfs(source, mid):
            hi = mid
        else:
            lo = mid
    return hi
```

Candidate's Solution

Language used: **Java 8**

```
import java.io.*;
import java.math.*;
import java.security.*;
import java.text.*;
import java.util.*;
import java.util.concurrent.*;
```

```java
import java.util.function.*;
import java.util.regex.*;
import java.util.stream.*;
import static java.util.stream.Collectors.joining;
import static java.util.stream.Collectors.toList;


class Result {

    /*
     * Complete the 'getMinimumStress' function below.
     *
     * The function is expected to return an INTEGER.
     * The function accepts following parameters:
     *  1. WEIGHTED_INTEGER_GRAPH graph
     *  2. INTEGER source
     *  3. INTEGER destination
     */

    /*
     * For the weighted graph, <name>:
     *
     * 1. The number of nodes is <name>Nodes.
     * 2. The number of edges is <name>Edges.
     * 3. An edge exists between <name>From[i] and <name>To[i]. The weight of the edge is <name>Weight[i].
     *
     */

    public static int getMinimumStress(int graphNodes, List<Integer> graphFrom, List<Integer> graphTo, List<Integer> graphWeight, int source, int destination) {

        if(source==destination) return 0;

        int n=graphFrom.size();

        List<int[]> edges=new ArrayList<>();

        for(int i=0;i<n;i++){
            edges.add(new int[]{
                graphFrom.get(i),
                graphTo.get(i),
                graphWeight.get(i)
            });
        }
```

```java

        edges.sort(Comparator.comparingInt(a->a[2]));

        int[] parent =new int[graphNodes+1];

        int[] rank =new int[graphNodes+1];

        for(int i=1;i<=graphNodes;i++){
            parent[i]=i;
        }

            for(int[] edge :edges){
                int u=edge[0];
                int v=edge[1];
                int weight=edge[2];

                union(u, v, parent, rank);

                if(find(source, parent)==find(destination, parent)){
                    return weight;
                }
            }
            return -1;
    }


    private static int find(int x, int[] parent){
        if(parent[x]!=x){
            parent[x]=find(parent[x], parent);
        }
        return parent[x];
    }

    private static void union(int x, int y, int[] parent, int[] rank){
        int rootX=find(x, parent);
        int rootY=find(y, parent);

        if(rootX==rootY) return;

        if(rank[rootX]<rank[rootY]){
            parent[rootX]=rootY;
        }else if(rank[rootX]>rank[rootY]){
            parent[rootY]=rootX;
        }else{
            parent[rootY]=rootX;
            rank[rootX]++;
```

```
        }
    }

}
public class Solution {
    public static void main(String[] args) throws IOException {
        BufferedReader bufferedReader = new BufferedReader(new InputStreamReader(System.in));
        BufferedWriter bufferedWriter = new BufferedWriter(new FileWriter(System.getenv("OUTPUT_PATH")));

        String[] graphNodesEdges = bufferedReader.readLine().replaceAll("\\s+$", "").split(" ");

        int graphNodes = Integer.parseInt(graphNodesEdges[0]);
        int graphEdges = Integer.parseInt(graphNodesEdges[1]);

        List<Integer> graphFrom = new ArrayList<>();
        List<Integer> graphTo = new ArrayList<>();
        List<Integer> graphWeight = new ArrayList<>();

        IntStream.range(0, graphEdges).forEach(i -> {
            try {
                String[] graphFromToWeight = bufferedReader.readLine().replaceAll("\\s+$", "").split(" ");

                graphFrom.add(Integer.parseInt(graphFromToWeight[0]));
                graphTo.add(Integer.parseInt(graphFromToWeight[1]));
                graphWeight.add(Integer.parseInt(graphFromToWeight[2]));
            } catch (IOException ex) {
                throw new RuntimeException(ex);
            }
        });

        int source = Integer.parseInt(bufferedReader.readLine().trim());

        int destination = Integer.parseInt(bufferedReader.readLine().trim());

        int result = Result.getMinimumStress(graphNodes, graphFrom, graphTo, graphWeight, source, destination);

        bufferedWriter.write(String.valueOf(result));
        bufferedWriter.newLine();

        bufferedReader.close();
```

```
        bufferedWriter.close();
    }
}

```

TESTCASE	DIFFICULTY	TYPE	STATUS	SCORE	TIME TAKEN	MEMORY USED
TestCase 0	Easy	Sample	Success	1	0.1287 sec	31.6 KB
TestCase 1	Easy	Sample	Success	1	0.1105 sec	31.6 KB
TestCase 2	Easy	Sample	Success	1	0.1269 sec	31.5 KB
TestCase 3	Easy	Hidden	Success	6	0.5672 sec	139 KB
TestCase 4	Easy	Hidden	Success	6	0.4652 sec	135 KB
TestCase 5	Easy	Hidden	Success	6	0.5988 sec	136 KB
TestCase 6	Easy	Hidden	Success	6	0.57 sec	149 KB
TestCase 7	Easy	Hidden	Success	6	0.5098 sec	155 KB
TestCase 8	Easy	Hidden	Success	6	0.5429 sec	138 KB
TestCase 9	Easy	Hidden	Success	6	0.4895 sec	149 KB
TestCase 10	Easy	Hidden	Success	6	0.528 sec	146 KB

TestCase 11	Easy	Hidden	Success	6	0.4795 sec	141 KB
TestCase 12	Easy	Hidden	Success	6	0.4254 sec	78.9 KB
TestCase 13	Easy	Hidden	Success	6	0.5627 sec	94.4 KB
TestCase 14	Easy	Hidden	Success	6	0.525 sec	151 KB

No comments.

7. Java: Optimized Sequential Video Watching

Correct

Coding Medium Greedy Java

Question description

A learner is given a sequential playlist of *n* videos to enhance their knowledge. Implement a function to calculate the minimum time required to complete a total of *m* viewings while adhering to the platform's constraints.

System Constraints

- Sequential Viewing:
  - The learner must watch videos in the order they appear in the playlist.
  - To watch a video at index *i*, the learner must first watch all videos from index 0 to *i-1* at least once.
- Initial Full Viewing:
  - To view any video at index *i* for the first time, the learner must spend *firstWatch[i] + repeatWatch[i]* minutes. This ensures a complete understanding of the video.

- Subsequent Viewings:
  - For subsequent viewings of a video at index *i*, the learner spends only *repeatWatch[i]* minutes.
  - At any time, they can rewatch any video they have already watched.
- Minimum Total Watch Count:
  - The learner must achieve at least *m* total viewings across all videos.
  - Videos can be rewatched as desired, and not all videos need to be watched equally.

Return the minimum time required to complete *m* viewings of videos while following these constraints.

Example

If *n* = 4, *m* = 4, *firstWatch* = [1, 5, 9, 11], and *repeatWatch* = [2, 7, 10, 11], the optimal strategy is as follows:

- The learner watches the 0th video for the first time, spending *firstWatch*[0] + *repeatWatch*[0] = 1 + 2 = 3 minutes.
- The learner then rewatches the 0th video 3 more times in, spending *repeatWatch*[0]*3 = 2 * 3 = 6 minutes.
- The learner has successfully completed 4 viewings. Thus, the total time required is 3 + 6 = 9 minutes, and 9 is returned.

Function Description

Complete the function *findMinMinutes* in the editor below.

Function Parameters

int m: the total number of video viewings to complete

int firstWatch[n]: the minutes required to watch each video the first time

int repeatWatch[n]: the minutes required to rewatch each video

Returns

long: the minimum minutes required for the learner to reach their target number of viewings

Constraints

- $1 \le n \le 10^5$
- $1 \le m \le 10^9$
- $1 \le firstWatch[i], repeatWatch[i] \le 10^9$

▼ INPUT FORMAT FOR CUSTOM TESTING

The first line contains an integer, *m*.
The next line contains an integer, *n,* the size of *firstWatch*.
Each of the next *n* lines contains an integer, *firstWatch[i]*.
The next line contains an integer, *n,* the size of *repeatWatch*.
Each of the next *n* lines contains an integer, *repeatWatch[i]*.

▼ SAMPLE CASE 0

Sample Input 0

```
STDIN    FUNCTION
-----    --------
5        m = 5
3        firstWatch[] size n = 3
6        firstWatch = [6, 8, 9]
8
9
3        repeatWatch[] size n = 3
4        repeatWatch = [4, 2, 10]
2
10
```

Sample Output 0

```
26
```

Explanation

The goal is to complete 5 viewings. One optimal strategy is:

- The learner watches the 0th video for the first time, so the time required is *firstWatch*[0] + *repeatWatch*[0] = 6 + 4 = 10 minutes.
- The learner watches the 1st video for the first time, so the time required is *firstWatch*[1] + *repeatWatch*[1] = 8 + 2 = 10 minutes.
- The learner then rewatches the 1st video 3 times. So the time taken = *repeatWatch*[1]*3 = 2 * 3 = 6 minutes.
- The total time required to complete 5 video viewings is 10 + 10 + 6 = 26 minutes.

▼ SAMPLE CASE 1

Sample Input 1

```
STDIN     FUNCTION
-----     --------
6         m = 6
```

```
5
2
3
7
8
4
5
3
6
8
7
6
```

firstWatch[] size n = 5
firstWatch = [2, 3, 7, 8, 4]

repeatWatch[] size n = 5
repeatWatch = [3, 6, 8, 7, 6]

Sample Output 1

```
20
```

Explanation

The goal is to complete 6 viewings. One optimal strategy is:

- The learner watches the 0th video for the first time in *firstWatch*[0] + *repeatWatch[0]* = 2 + 3 = 5 minutes.
- The learner then rewatches the 0th video 5 times in *repeatWatch[0]**5 = 3 * 5 = 15 minutes.
- The total time required to complete 6 viewings is 5 + 15 = 20 minutes.

Interviewer guidelines

▼ SOLUTION

Description

The greedy solution suggests that, at any given index, if the time to watch the video is less than at any other index between i+1 and n, the minimum total time will be the sum of the watch time up to index i-1, plus the repeat time of the ith video multiplied by (m-i).

Solution

```
class Result {

    /*
     * Complete the 'findMinMinutes' function below.
     *
     * The function is expected to return a LONG_INTEGER.
     * The function accepts following parameters:
     *  1. INTEGER m
     *  2. INTEGER_ARRAY firstWatch
```

```
     *  3. INTEGER_ARRAY repeatWatch
     */

     public static long findMinMinutes(int m, List<Integer> firstWatch, List<Integer> repeatWatch) {
       long minMinutes = Long.MAX_VALUE;
       long cur = 0;
       int n = firstWatch.size();

       for (int i = 0; i < Math.min(n,m); i++) {
          int a = firstWatch.get(i);
          int b = repeatWatch.get(i);

          minMinutes = Math.min(minMinutes, cur + ((long) (m - i) * b) + a);

          cur += a + b;
       }
       return minMinutes;
    }

 }
```

▼ COMPLEXITY

Time Complexity - O(n)

The algorithm iterates through each number in *firstWatch* and *repeatWatch* exactly once, performing constant-time checks and arithmetic operations in each iteration. Thus, the time complexity is O(n), where *n* is the length of *firstWatch*.

Space Complexity - O(1)

Space usage is constant, only utilizing a fixed number of variables (*mn, cur,* etc.) that do not scale with the length of *firstWatch*. Therefore, the space complexity is O(1).

Candidate's Solution Language used: **Java 8**

```
import java.io.*;
import java.math.*;
import java.security.*;
import java.text.*;
import java.util.*;
import java.util.concurrent.*;
import java.util.function.*;
import java.util.regex.*;
```

```java
import java.util.stream.*;
import static java.util.stream.Collectors.joining;
import static java.util.stream.Collectors.toList;


class Result {

    /*
     * Complete the 'findMinMinutes' function below.
     *
     * The function is expected to return a LONG_INTEGER.
     * The function accepts following parameters:
     *  1. INTEGER m
     *  2. INTEGER_ARRAY firstWatch
     *  3. INTEGER_ARRAY repeatWatch
     */

    public static long findMinMinutes(int m, List<Integer> firstWatch, List<Integer> repeatWatch) {
        int n=firstWatch.size();

        long totalFirstCost=0;
        long minRepeat=Long.MAX_VALUE;
        long answer=Long.MAX_VALUE;

        for(int i=0;i<n;i++){
            totalFirstCost+= (long)firstWatch.get(i)+repeatWatch.get(i);

            minRepeat=Math.min(minRepeat, repeatWatch.get(i));

            long viewDone=i+1;

            if(viewDone>=m){
                answer=Math.min(answer, totalFirstCost);
                break;
            }

            long remaining = m-viewDone;

            long totalCost=totalFirstCost+remaining*minRepeat;

            answer=Math.min(answer, totalCost);
        }

        return answer;
    }
```

```
}
public class Solution {
    public static void main(String[] args) throws IOException {
        BufferedReader bufferedReader = new BufferedReader(new InputStreamReader(System.in));
        BufferedWriter bufferedWriter = new BufferedWriter(new FileWriter(System.getenv("OUTPUT_PATH")));

        int m = Integer.parseInt(bufferedReader.readLine().trim());

        int firstWatchCount = Integer.parseInt(bufferedReader.readLine().trim());

        List<Integer> firstWatch = IntStream.range(0, firstWatchCount).mapToObj(i -> {
            try {
                return bufferedReader.readLine().replaceAll("\\s+$", "");
            } catch (IOException ex) {
                throw new RuntimeException(ex);
            }
        })
            .map(String::trim)
            .map(Integer::parseInt)
            .collect(toList());

        int repeatWatchCount = Integer.parseInt(bufferedReader.readLine().trim());

        List<Integer> repeatWatch = IntStream.range(0, repeatWatchCount).mapToObj(i -> {
            try {
                return bufferedReader.readLine().replaceAll("\\s+$", "");
            } catch (IOException ex) {
                throw new RuntimeException(ex);
            }
        })
            .map(String::trim)
            .map(Integer::parseInt)
            .collect(toList());

        long result = Result.findMinMinutes(m, firstWatch, repeatWatch);

        bufferedWriter.write(String.valueOf(result));
        bufferedWriter.newLine();

        bufferedReader.close();
```

```
        bufferedWriter.close();
    }
}

```

TESTCASE	DIFFICULTY	TYPE	STATUS	SCORE	TIME TAKEN	MEMORY USED
Testcase 2	Easy	Sample	Success	1	0.1149 sec	31.6 KB
Testcase 0	Easy	Sample	Success	1	0.106 sec	31.9 KB
Testcase 1	Easy	Sample	Success	1	0.1265 sec	31.8 KB
Testcase 3	Easy	Hidden	Success	4	0.1151 sec	31.8 KB
Testcase 4	Easy	Hidden	Success	4	0.111 sec	32 KB
Testcase 5	Easy	Hidden	Success	4	0.1438 sec	35.4 KB
Testcase 6	Medium	Hidden	Success	5	0.3166 sec	90.7 KB
Testcase 7	Medium	Hidden	Success	5	0.5483 sec	174 KB
Testcase 8	Medium	Hidden	Success	5	0.451 sec	176 KB
Testcase 9	Medium	Hidden	Success	5	0.4538 sec	176 KB
Testcase 10	Medium	Hidden	Success	5	0.4854 sec	175 KB

Testcase 11	Medium	Hidden	Success	5	0.3875 sec	164 KB
Testcase 12	Hard	Hidden	Success	10	0.3195 sec	95.9 KB
Testcase 13	Hard	Hidden	Success	10	0.5066 sec	165 KB
Testcase 14	Hard	Hidden	Success	10	0.1871 sec	31.8 KB

No comments.