91.4
Pass

Piyush Budhrani

PDF generated at: 12 Feb 2026 15:02:13 UTC

View this report on HackerRank

Score

91.4% • 160.0 / 175
scored in eClerx - Java Coding Test - 3+ Years New in 58 min 3 sec on 12 Feb 2026 19:32:00 IST

Candidate Information

Email	piyushbudhrani@outlook.com
Test	eClerx - Java Coding Test - 3+ Years New
Candidate Packet	View
Taken on	12 Feb 2026 19:32:00 IST
Time taken	58 min 3 sec/ 90 min
Work Experience	> 5 years
Invited by	Kalyani
Invited on	12 Feb 2026 18:22:48 IST

Skill Distribution

No.	Skill	Score
1	Spring Boot Advanced	66%

2	Spring Boot Intermediate	0%
3	Problem Solving Intermediate	100%
4	Java Intermediate	100%

Tags Distribution

Spring Boot	40%	Hard	66%
TDD	100%	Medium	93%
Exception Handling	0%	Aspect-Oriented Programming	0%
Graphs	100%	Java	100%
Exceptions	100%	OOP	100%

Questions

Spring Boot (Advanced) • 10 / 25

No.	Question	Skill	Score	Code Quality	Time Taken	Status
1	JSON Deserialization Multiple Choice	Spring Boot (Advanced)	0/5	-	1 min 42 sec	⊗

2	Specification Multiple Choice	Spring Boot (Advanced)	5/5	-	1 min 50 sec	✓
3	Output Multiple Choice	Spring Boot (Advanced)	5/5	-	2 min 27 sec	✓
4	Endpoint Security Multiple Choice	Spring Boot (Intermediate)	0/5	-	1 min 38 sec	✗
5	Predict the Output Multiple Choice	Spring Boot (Intermediate)	0/5	-	2 min 41 sec	✗

Problem Solving (Intermediate) • 75 / 75

No.	Question	Skill	Score	Code Quality	Time Taken	Status
6	Minimize Path Value Coding	Problem Solving (Intermediate)	75/75	-	16 min 13 sec	✓

Java (Intermediate) • 75 / 75

No.	Question	Skill	Score	Code Quality	Time Taken	Status
7	Java: Vending Machine Coding	Java (Intermediate)	75/75	-	29 min 48 sec	✓

1. JSON Deserialization

✗ Incorrect

Multiple Choice | Spring Boot | Hard

Question description

CheckerCreateRequest.java

```
// Annotation here
public class CheckerCreateRequest {
    private String name;
    private String surname;
    public String getName() {
        return name;
    }
    public void setName(String name) {
        this.name = name;
    }
    public String getSurname() {
        return surname;
    }
    public void setSurname(String surname) {
        this.surname = surname;
    }
}
```

CheckerController.java

```
@RestController
@RequestMapping("/checkers")
public class CheckerController {

    @Autowired
    CheckerService checkerService;

    @PostMapping
    public ResponseEntity createChecker(@RequestBody CheckerCreateRequest checkerCreateReque
st) {
        checkerService.createChecker(checkerCreateRequest);
        return new ResponseEntity(HttpStatus.CREATED);
    }
}
```

Request Json data

```
{
   "checker":{
      "name": "Checker",
      "surname":"Number2"
   }
}
```

A POST request with "Request Json data" is made to "/checkers". What annotation needs to be added to the "CheckerCreateRequest" class so that it can successfully deserialize and process the request?

Interviewer guidelines

@JsonRootName doesn't add checker as a wrapper attribute by itself. To make it successfully deserialize with given json annotations on D should be used together.

Candidate's Solution

Options: (Expected answer indicated with a tick)

- ● **@JsonRootName("checker")**
- ○ @JsonName("checker")
- ○ @JsonTypeName("checker")
- ○ @JsonTypeInfo(include = JsonTypeInfo.As.WRAPPER_OBJECT, use = JsonTypeInfo.Id.NAME) @JsonTypeName("checker") ✓

No comments.

2. Specification

Correct

Multiple Choice | Spring Boot | Hard

Question description

Which of the following options can be used for dynamic jpa queries with spring-data-jpa repositories?

Candidate's Solution

Options: (Expected answer indicated with a tick)

- ○ PreparedStatement
- ● Specification ✓
- ○ Criteria
- ○ Query

No comments.

3. Output

Correct

Multiple Choice | Hard | Spring Boot | TDD

Question description

What will happen to the output file?

```
@SpringBootTest
public class LogTest
{
   File log;
   FileWriter logWriter;

   @Autowired
   SomeClassToTest someClassToTest;

   @Before
   public void init()
   {
     log = new File("log.txt");
     logWriter = new FileWriter(log);
   }

   @After
   public void teardown()
   {
      log.delete();
   }

   @Test
   public void test1()
   {
      logWriter.write("Entered Test 1");
      assertTrue(someClassToTest.someMethod());
   }

   @Test
   public void test2()
   {
      logWriter.write("Entered Test 2");
      assertTrue(someClassToTest.otherMethod());
   }
}
```

Candidate's Solution

Options: (Expected answer indicated with a tick)

- ○ The output file is not created.
- ○ The output file is created but not deleted.
- ● **The output file is created and eventually deleted.** ✓
- ○ The create and delete blocks will not be executed.

No comments.

---

4. Endpoint Security

Incorrect

Multiple Choice | Spring Boot | Medium

Question description

In Spring Boot Security, the option to enable secure endpoints with @PreAuthorize annotation is:

Interviewer guidelines

@EnableGlobalMethodSecurity by default doesn't enable this feature. To enable this prePostEnabled=true value must be set

Candidate's Solution

Options: (Expected answer indicated with a tick)

- [x] Configuration class annotated with @EnableGlobalMethodSecurity
- [ ] Configuration class annotated with @EnableGlobalMethodSecurity(securedEnabled = true)
- [ ] Configuration class annotated with @EnableGlobalMethodSecurity(prePostEnabled = true)
- [ ] None above

No comments.

5. Predict the Output

Incorrect

Multiple Choice | Medium | Exception Handling | Spring Boot | Aspect-Oriented Programming

Question description

Consider the following Snippet and predict the output.

The following API is triggered: http://localhost:8080/add/employee?eId=123&fName=Ravi&lastName=Shekhar

```
@Autowired
private EService eService;

@RequestMapping(value = "/add/employee", method = RequestMethod.GET)
public com.model.Employee add(@RequestParam("eId") String eId, @RequestParam("fName") Strin
g fName, @RequestParam("lastName") String lastName)
```

```
{
    return eService.createEmployee(eId, fName, lastName);
}

@Aspect
@Component
public class EServiceAspect
{
    @After(value = "execution(* com.random.service.EService.*(..)) && args(eId, fName, lastName)")
    public void afterAdvice(JoinPoint joinPoint, String eId, String fName, String lastName) {
        System.out.println("After method:" + joinPoint.getSignature());
        System.out.println("Creating Employee with first name - " + fName+ ", second name - " + lastNa
me+ " and id - " + eId);
    }
}
```

Candidate's Solution

Options: (Expected answer indicated with a tick)

- [ ] After method : com.test.model.Employee addEmployee(String,String,String) Creating Employee with first name - Ravi , second name - Shekhar and id - 123

- [ ] After method : com.test.model.Employee addEmployee(string,string,string) Creating Employee with first name - Ravi , second name - Shekhar and id - 123

- [x] ** After method : com.test.model.Employee addEmployee(empId,firstName,secondName) Creating Employee with first name - Ravi , second name - Shekhar and id - 123   **

After method : com.test.model.Employee addEmployee(String,String,String)
Creating Employee with first name - Shekhar, second name - Ravi and id - 123

No comments.

6. Minimize Path Value

Correct

Coding Graphs Medium

Question description

You have a weighted undirected graph with *graph_nodes* nodes and *m* edges. The stress level of a path between two nodes is defined as the weight of the heaviest edge in that path.

Given a source node *source* and a destination node *destination*, find the minimum possible stress level of a path. If no such path exists, return -1.

Example

Consider the following example below, where *source=1* and *destination=3.*

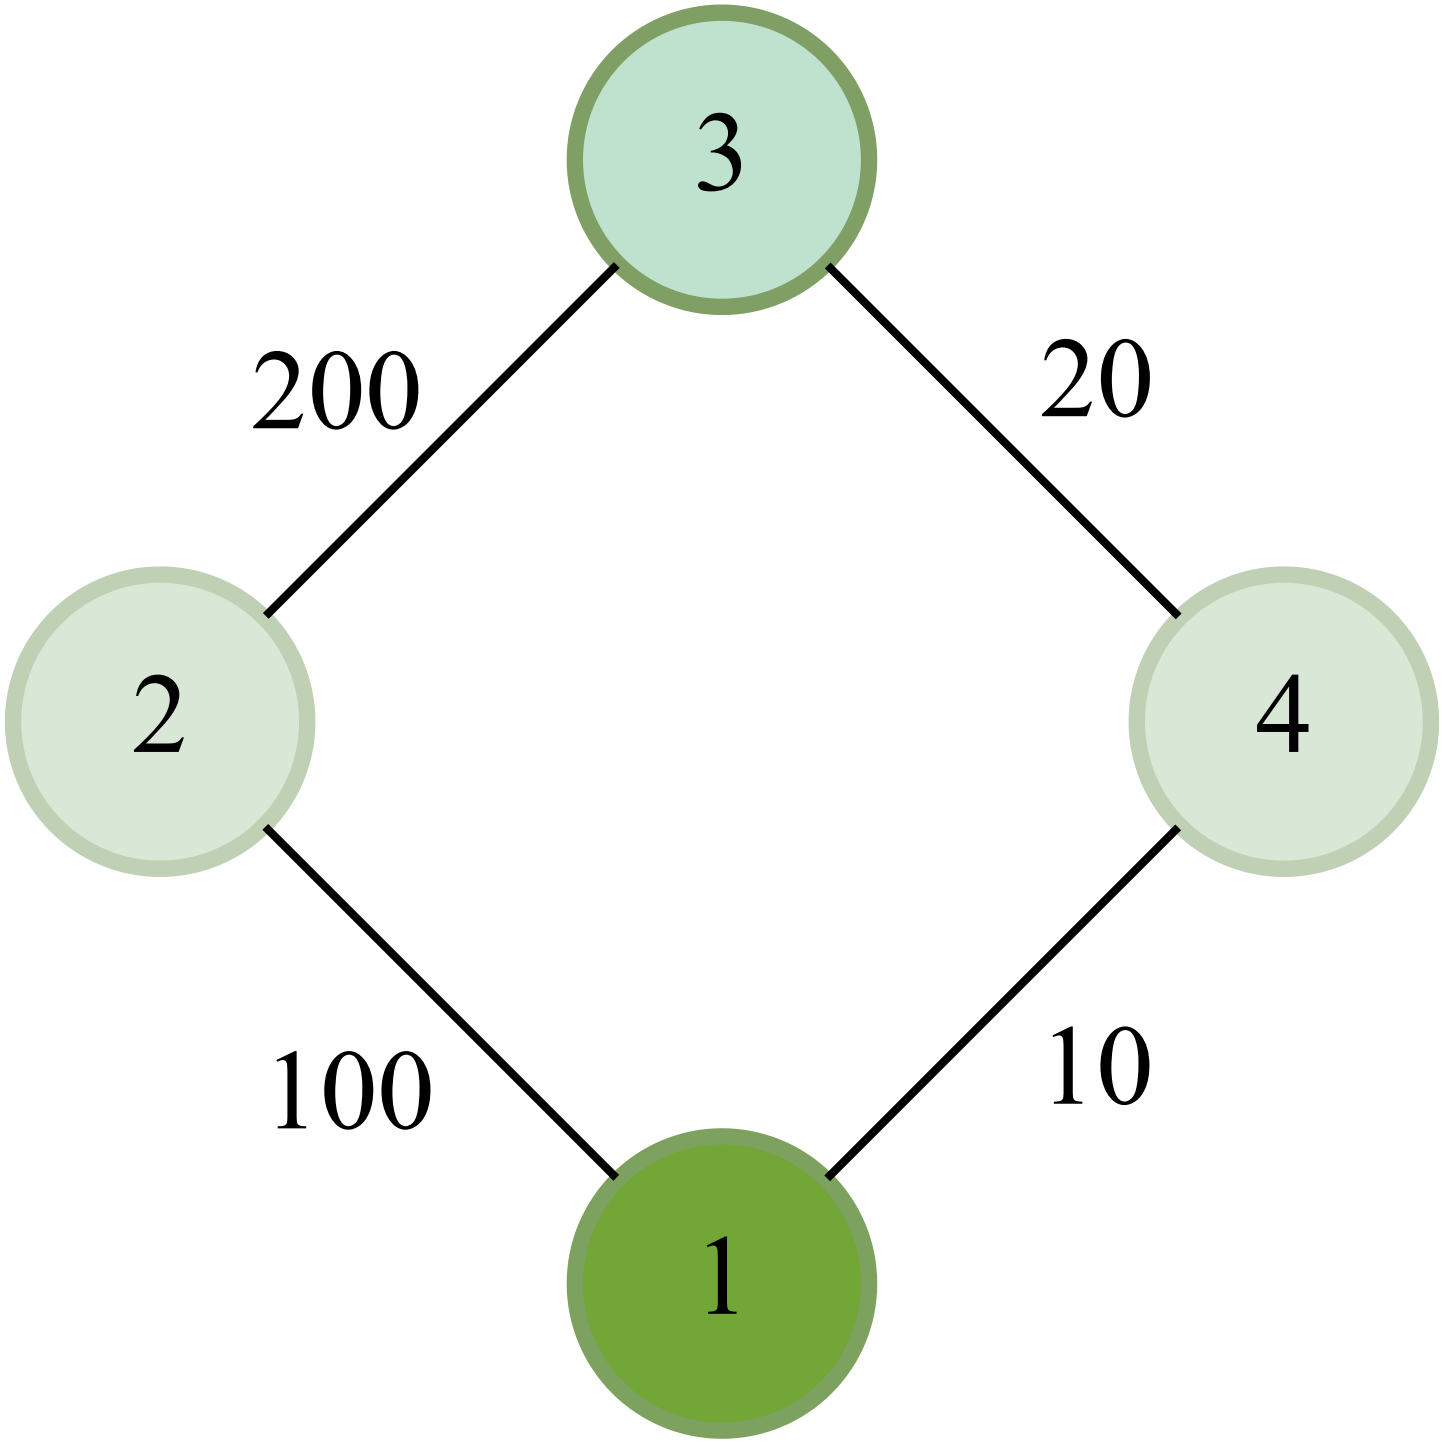

There are two paths, from node 1 to node 3.

1. The max weighted edge/stress level in path 1 -> 2 -> 3 is 200.
2. The max weighted edge/stress level in the path 1 -> 4 -> 3 is 20.

Return 20, the lower stress level from the second path.

Function Description

Complete the function *getMinimumStress* in the editor with the following parameter(s):

int graph_nodes: number of nodes
int graph_from[m]: one end node for an edge
int graph_to[m]: one end node for an edge
int graph_weight[m]: the weights of the edges
int source: the source node
int destination: the destination node

Returns

int: the value of the least stressful path, or -1 if no path exists

Note: Even though edge endpoints are called *graph_from[i]* and *graph_to[i]*, this is an undirected graph.

Constraints

- $1 \le graph_nodes \le 10^5$
- $1 \le |graph_from| = |graph_to| = |graph_weight| \le 10^5$ *(Where |A| denotes the size of array A)*
- $1 \le graph_from[i], graph_to[i], source, destination \le graph_nodes$
- $0 \le graph_weight[i] \le 10^9$

▼ INPUT FORMAT FOR CUSTOM TESTING

The first line contains two space-separated integers *graph_nodes* and *m,* the number of nodes, and the number of edges of the graph.
Each of the following *m* lines contains three space-separated integers *u, v,* and *w,* meaning there is an edge connecting the nodes *u* and *v* of weight *w.*
The next line contains a single integer, denoting the index of the "*source*" node.
The next line contains a single integer, denoting the index of the "*destination*" node.

▼ SAMPLE CASE 0

Sample Input For Custom Testing

```
STDIN       FUNCTION
-----       ---------
5 6         graph_nodes = 5, m = 6
1 2 10      u = 1, v = 2, w = 10
```

```
2 3 5
1 4 3
4 3 2
1 5 4
5 3 6
1          source = 1
3          destination = 3
```

Sample Output

```
3
```

Explanation

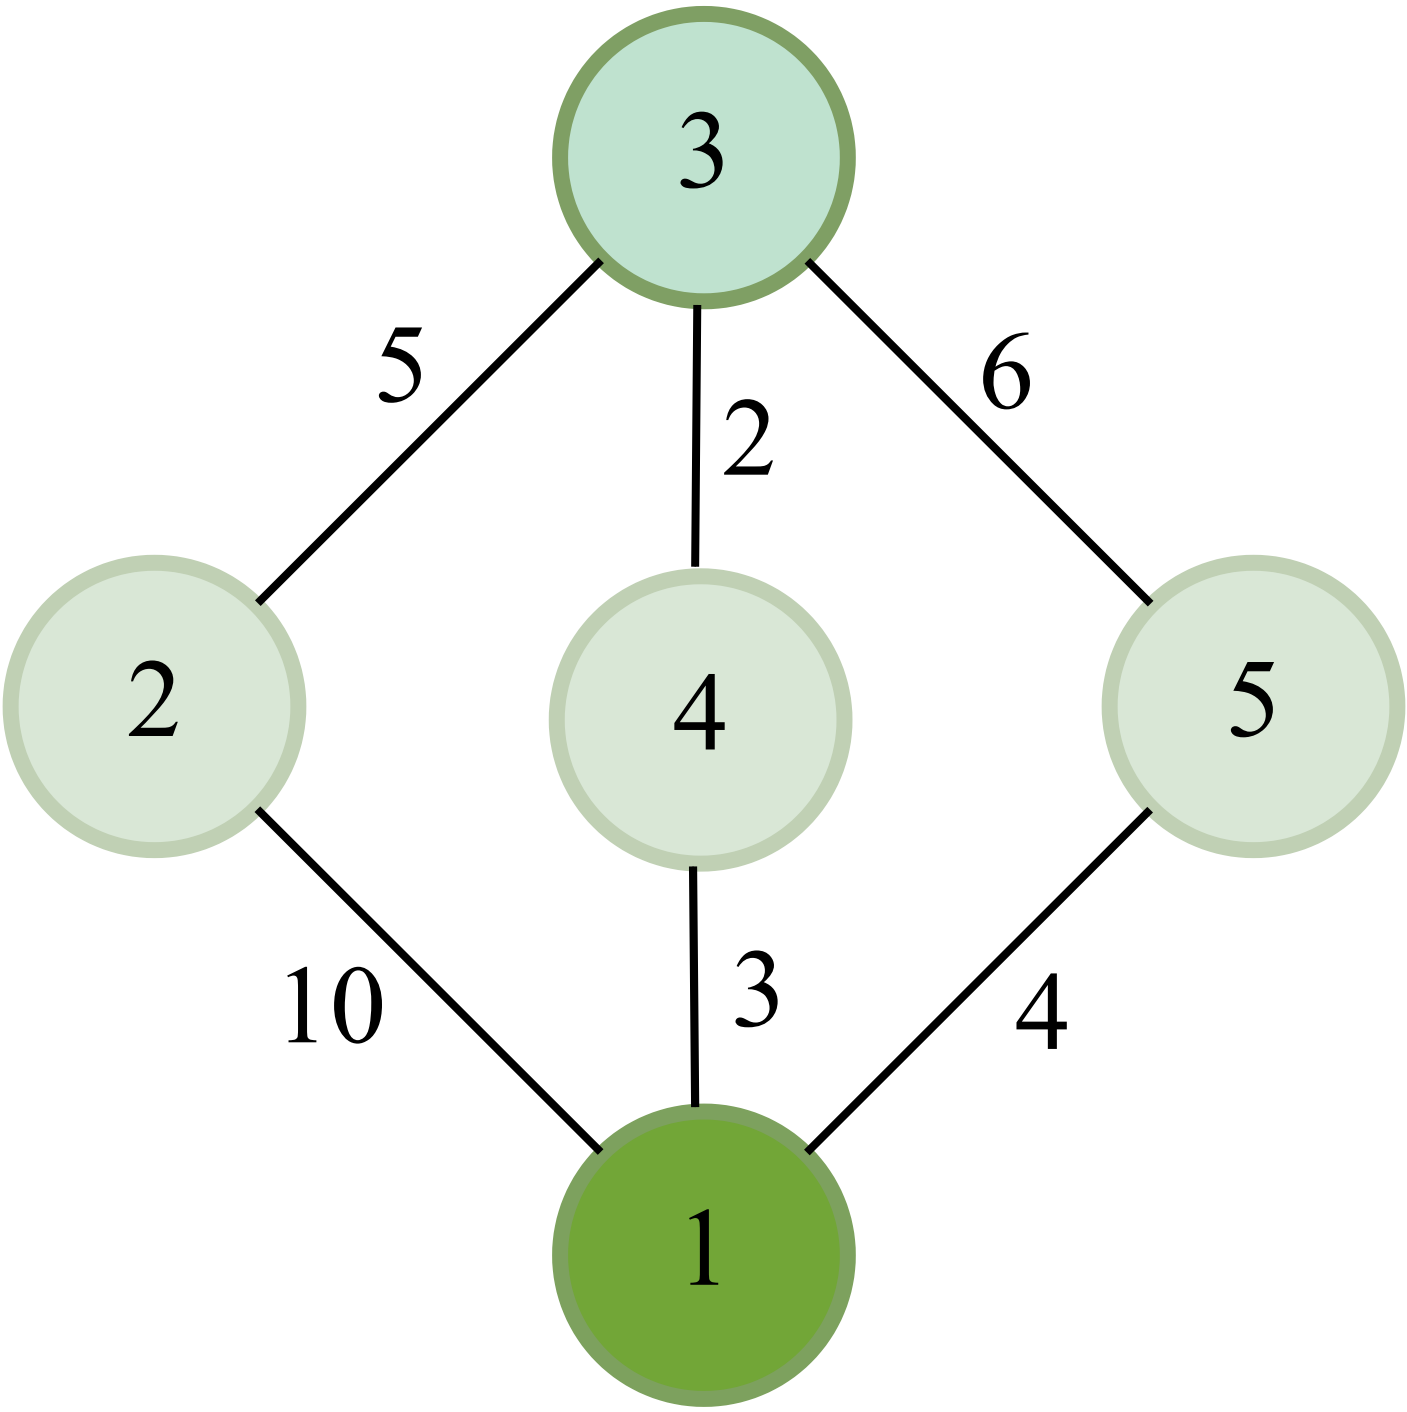

There are three paths, from node 1 to node 3 :

1. 1 -> 2 -> 3. Edges have weights 10 and 5, the maximum weighted edge, and the stress level is 10.
2. 1 -> 4 -> 3. Edges have weights 3 and 2, and the stress level = 3.
3. 1 -> 5 -> 3. Edges have weights 4 and 6, and the stress level = 6.

▼ SAMPLE CASE 1

Sample Input For Custom Testing

```
STDIN       FUNCTION
-----       --------
3 1          graph_nodes = 3, m = 1
1 2 10       a = 1, b = 2, w = 10
1           source = 1
3           destination = 3
```

Sample Output

```
-1
```

Explanation

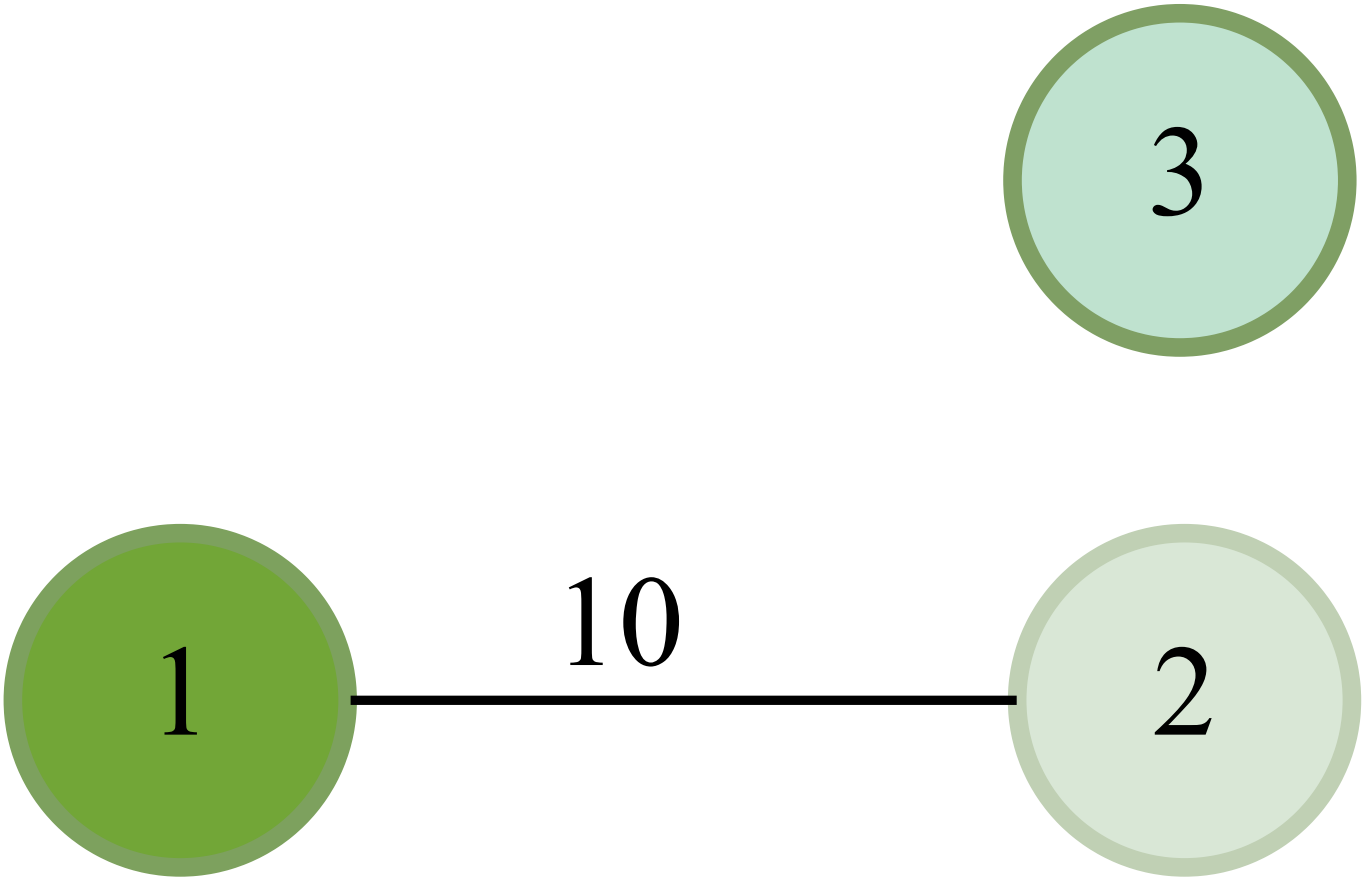

There is no path, from node 1 to node 3.

Interviewer guidelines

▼ SOLUTION

Python Solution

```
sys.setrecursionlimit(10**5)


def getMinimumStress(graph_nodes, graph_from, graph_to, graph_weight, source, destination):

    adj = [[] for i in range(graph_nodes + 1)]
    vis = [False] * (graph_nodes + 1)

    for x, y, w in zip(graph_from, graph_to, graph_weight):
        adj[x].append((y, w))
        adj[y].append((x, w))

    def dfs(node, mx):
        vis[node] = True
        if node == destination:
            return True
        ans = False
        for i, w in adj[node]:
            if w <= mx and not vis[i]:
                ans |= dfs(i, mx)
        return ans

    if not dfs(source, max(graph_weight)):
        return -1

    lo, hi = 0, max(graph_weight)
    while hi - lo > 1:
        vis = [False] * (graph_nodes + 1)
        mid = (hi + lo) // 2
        if dfs(source, mid):
            hi = mid
        else:
            lo = mid
    return hi
```

Candidate's Solution

Language used: **Java 21**

```java
import java.io.*;
import java.math.*;
import java.security.*;
import java.text.*;
import java.util.*;
import java.util.concurrent.*;
import java.util.function.*;
```

```java
import java.util.regex.*;
import java.util.stream.*;
import static java.util.stream.Collectors.joining;
import static java.util.stream.Collectors.toList;



class Result {

    /*
     * Complete the 'getMinimumStress' function below.
     *
     * The function is expected to return an INTEGER.
     * The function accepts following parameters:
     *  1. WEIGHTED_INTEGER_GRAPH graph
     *  2. INTEGER source
     *  3. INTEGER destination
     */

    /*
     * For the weighted graph, <name>:
     *
     * 1. The number of nodes is <name>Nodes.
     * 2. The number of edges is <name>Edges.
     * 3. An edge exists between <name>From[i] and <name>To[i]. The weight of the edge is <name>Weight[i].
     *
     */

    static class Edge {
        int to , weight;
        Edge( int t, int w) {
            to = t;
            weight = w;
        }
    }
    public static int getMinimumStress(int graphNodes, List<Integer> graphFrom, List<Integer> graphTo, List<Integer> graphWeight, int source, int destination) {
        List<List<Edge>> graph = new ArrayList<>();
        for(int i = 0 ; i<= graphNodes;i++) {
            graph.add(new ArrayList<>());
        }

         for(int i = 0 ; i< graphFrom.size();i++) {
            int u = graphFrom.get(i);
```

```
            int v = graphTo.get(i);
            int w = graphWeight.get(i);

            graph.get(u).add(new Edge(v, w));
            graph.get(v).add(new Edge(u, w));
        }

        int[] stress = new int[graphNodes + 1];
        Arrays.fill(stress, Integer.MAX_VALUE);
        stress[source] = 0;

        PriorityQueue<int[]> pq = new PriorityQueue<>
(Comparator.comparing(a-> a[1]));

        pq.offer(new int[]{source , 0});

        while(!pq.isEmpty()) {
            int[] cur = pq.poll();
            int node = cur[0];
            int curStress = cur[1];

            if(node ==destination) return curStress;

            for( Edge e : graph.get(node)) {
                int newStress = Math.max(curStress, e.weight);

                if( newStress < stress[e.to]) {
                    stress[e.to] = newStress;
                    pq.offer(new int[]{e.to, newStress});
                }
            }
        }


        return -1;
    }

}

public class Solution {
    public static void main(String[] args) throws IOException {
        BufferedReader bufferedReader = new BufferedReader(new
InputStreamReader(System.in));
        BufferedWriter bufferedWriter = new BufferedWriter(new
FileWriter(System.getenv("OUTPUT_PATH")));

```

```java
        String[] graphNodesEdges = bufferedReader.readLine().replaceAll("\\s+$", "").split(" ");

        int graphNodes = Integer.parseInt(graphNodesEdges[0]);
        int graphEdges = Integer.parseInt(graphNodesEdges[1]);

        List<Integer> graphFrom = new ArrayList<>();
        List<Integer> graphTo = new ArrayList<>();
        List<Integer> graphWeight = new ArrayList<>();

        IntStream.range(0, graphEdges).forEach(i -> {
            try {
                String[] graphFromToWeight = bufferedReader.readLine().replaceAll("\\s+$", "").split(" ");

                graphFrom.add(Integer.parseInt(graphFromToWeight[0]));
                graphTo.add(Integer.parseInt(graphFromToWeight[1]));
                graphWeight.add(Integer.parseInt(graphFromToWeight[2]));
            } catch (IOException ex) {
                throw new RuntimeException(ex);
            }
        });

        int source = Integer.parseInt(bufferedReader.readLine().trim());

        int destination = Integer.parseInt(bufferedReader.readLine().trim());

        int result = Result.getMinimumStress(graphNodes, graphFrom, graphTo, graphWeight, source, destination);

        bufferedWriter.write(String.valueOf(result));
        bufferedWriter.newLine();

        bufferedReader.close();
        bufferedWriter.close();
    }
}

```

TESTCASE	DIFFICULTY	TYPE	STATUS	SCORE	TIME TAKEN	MEMORY USED

TestCase 0	Easy	Sample	Success	1	0.0515 sec	37.8 KB
TestCase 1	Easy	Sample	Success	1	0.0642 sec	37.4 KB
TestCase 2	Easy	Sample	Success	1	0.0538 sec	37.5 KB
TestCase 3	Easy	Hidden	Success	6	0.5142 sec	132 KB
TestCase 4	Easy	Hidden	Success	6	0.4432 sec	101 KB
TestCase 5	Easy	Hidden	Success	6	0.5865 sec	122 KB
TestCase 6	Easy	Hidden	Success	6	0.5597 sec	127 KB
TestCase 7	Easy	Hidden	Success	6	0.6192 sec	136 KB
TestCase 8	Easy	Hidden	Success	6	0.6097 sec	120 KB
TestCase 9	Easy	Hidden	Success	6	0.7066 sec	126 KB
TestCase 10	Easy	Hidden	Success	6	0.9209 sec	132 KB
TestCase 11	Easy	Hidden	Success	6	0.7826 sec	140 KB
TestCase 12	Easy	Hidden	Success	6	0.32 sec	75.5 KB

TestCase 13	Easy	Hidden	Success	6	0.3516 sec	79.8 KB
TestCase 14	Easy	Hidden	Success	6	0.4582 sec	137 KB

No comments.

7. Java: Vending Machine

Correct

Coding Medium Java Exceptions OOP

Question description

Design a vending machine that serves 3 drinks: "Coke", "Fanta", and "Sprite".

Create a *VendingMachine* class that implements the following methods:

- *void registerDrink(int buttonNumber, Drink drink)*: Registers a type of drink with a particular *buttonNumber* of the vending machine. Here, *Drink* is an interface provided in the locked stub.
- *ServedDrinkSummary(int buttonNumber, int money)*: Returns the Drink that is served when *buttonNumber* is pressed, and an amount of money is entered by a customer.

The class contains two attributes:

- *change*: the units of currency to return to the consumer
- *drink*: the drink requested

There are three potential error conditions:

- If the machine has run out of the drink, an *OutOfStockException* should be thrown with the message "{drinkName} is out of stock".
- If the money the user enters is insufficient to buy the drink, an *InsufficientMoneyException* should be thrown.
- If the drink is out of stock and the user has not entered enough money, throw an *OutOfStockException* with the previously mentioned message.

The *OutOfStockException, InsufficientMoneyException*, and *ServedDrinkSummary* classes are provided in the locked stub.

The locked stub validates the *VendingMachine* class by processing some requests.

Constraints

- $1 \le totalNumberOfRequests \le 10^4$
- $0 \le buttonNumber \le 2$
- $0 \le money \le 100$
- $0 \le quantity$ available of each $drink \le 10^4$
- $0 \le price$ per unit of each $drink \le 10^4$
- No two drinks are assigned the same *buttonNumber.*

▼ INPUT FORMAT FOR CUSTOM TESTING

The first line contains three integers that represent the *quantity* of *Coke*, *Fanta,* and *Sprite* in the vending machine respectively.
The second line contains three integers that represent the *price* per unit of *Coke*, *Fanta,* and *Sprite* respectively.
The third line contains three integers that represent the *buttonNumbers* assigned to *Coke*, *Fanta,* and *Sprite* respectively.
The fourth line contains an integer, *totalNumberOfRequests .*
The next *totalNumberOfRequests* lines contain the *buttonNumber* pressed and *money* inserted separated by a space.

▼ SAMPLE CASE 0

Sample Input For Custom Testing

```
STDIN    Function
-----    --------
2 1 0    quantity Coke = 2, Fanta = 1, Sprite = 0
5 10 15  price Coke = 5, Fanta = 10, Sprite = 15
0 1 2    buttonNumbers Coke = 0, Fanta = 1, Sprite = 2
4        totalNumberOfRequests = 4
0 20     buttonNumber = 0, money = 20 for the first request
2 20     buttonNumber = 2, money = 20 for the second request
2 5      ...
1 5
```

Sample Output

```
Vending machine set up
Coke 15
Sprite is out of stock
Sprite is out of stock
Insufficient money
```

Explanation

- *0 20:* A request to process a can of *Coke* and *20* units of money is provided to the vending machine. *Coke* is in stock and costs *5* units of money so *15* units in change is returned to the consumer. The locked stub prints "*Coke 15".*
- *2 20:* A request to process a can of *Sprite* and *20* units of money is provided to the vending machine. *Sprite* is out of stock so an *OutOfStockException* is thrown, and the stub prints "*Sprite is out of stock".*
- *2 5:* A request to process a can of *Sprite* and *5* units of money is provided to the vending machine. *Sprite* is out of stock and the amount of *money* is insufficient so an *OutOfStockException* is thrown and the stub prints, "*Sprite is out of stock".*
- *1 5:* A request to process a can of *Fanta* and *5* units of money is provided. Since the price of a unit of *Fanta is 10* and it is in stock, an *InsufficientMoneyException* is thrown, and the stub prints "*Insufficient money".*

Interviewer guidelines

▼ SOLUTION

Solution for Java 7, 8 and 15

```
class VendingMachine{
    HashMap<Integer, Drink> drinkRelatedToButton = new HashMap<>();

    void registerDrink(int buttonIdx, Drink drink){
        drinkRelatedToButton.put(buttonIdx, drink);
    }

    ServeDrinkSummary dispatch(int buttonPressed, int money)throws OutOfStockException, Insuffi
cientMoneyException{
        ServeDrinkSummary serveDrinkSummary = new ServeDrinkSummary();
        serveDrinkSummary.servedDrink = drinkRelatedToButton.get(buttonPressed);
        serveDrinkSummary.change = money - serveDrinkSummary.servedDrink.getPrice();
```

```
        if(serveDrinkSummary.servedDrink.getQuantityLeft() == 0){
            throw new OutOfStockException(serveDrinkSummary.servedDrink.getName() + " is out of st
ock");
        }

        if(serveDrinkSummary.change < 0){
            throw new InsufficientMoneyException();
        }
        return serveDrinkSummary;
    }
}
```

Candidate's Solution

Language used: **Java 21**

```java
import java.io.*;
import java.util.*;
import java.text.*;
import java.math.*;
import java.util.regex.*;

interface Drink{
    int getPrice();
    String getName();
    int getQuantityLeft();
    void serveDrink();
}

class ServeDrinkSummary{
    Drink servedDrink;
    int change;
}

class OutOfStockException extends Exception{
    public OutOfStockException(String message){
        super(message);
    }
}

class InsufficientMoneyException extends Exception{
    public InsufficientMoneyException(){
        super();
    }
}
import java.io.*;
import java.util.*;
```

```java
import java.text.*;
import java.math.*;
import java.util.regex.*;

interface Drink{
    int getPrice();
    String getName();
    int getQuantityLeft();
    void serveDrink();
}

class ServeDrinkSummary{
    Drink servedDrink;
    int change;

    ServeDrinkSummary(Drink serveDrink, int change) {
        this.servedDrink = serveDrink;
        this.change = change;
    }
}

class OutOfStockException extends Exception{
    public OutOfStockException(String message){
        super(message);
    }
}

class InsufficientMoneyException extends Exception{
    public InsufficientMoneyException(){
        super();
    }
}
class VendingMachine{

    private Map<Integer,Drink> buttonDrinkMap = new HashMap<>();

    void registerDrink(int buttonIdx, Drink drink){
        buttonDrinkMap.put(buttonIdx, drink);
    }

    ServeDrinkSummary dispatch(int buttonPressed, int money)
        throws OutOfStockException, InsufficientMoneyException{

            Drink drink = buttonDrinkMap.get(buttonPressed);

            if(drink.getQuantityLeft() == 0) {
```

```
                throw new OutOfStockException(drink.getName() + " is out of stock");
            }

            if(money < drink.getPrice()) {
                throw new InsufficientMoneyException();
            }

            int change = money - drink.getPrice();

            return new ServeDrinkSummary(drink, change);

    }
}


class Solution{

    public static void main(String[] args) throws IOException{
        String arr[];
        int quantity[] = new int[3], pricePerUnit[] = new int[3], buttonAssigned[] = new int[3];

        BufferedReader br = new BufferedReader(new InputStreamReader(System.in));
        PrintWriter out = new PrintWriter(System.out);

        arr = br.readLine().split(" ");
        for(int i = 0; i < 3; i++){
            quantity[i] = Integer.parseInt(arr[i]);
        }

        arr = br.readLine().split(" ");
        for(int i = 0; i < 3; i++){
            pricePerUnit[i] = Integer.parseInt(arr[i]);
        }

        arr = br.readLine().split(" ");
        for(int i = 0; i < 3; i++){
            buttonAssigned[i] = Integer.parseInt(arr[i]);
        }

        VendingMachine vendingMachine = new VendingMachine();
        Drink coke = new Coke(pricePerUnit[0], "Coke", quantity[0]);
        Drink fanta = new Fanta(pricePerUnit[1], "Fanta", quantity[1]);
        Drink sprite = new Sprite(pricePerUnit[2], "Sprite", quantity[2]);
```

```
        vendingMachine.registerDrink(buttonAssigned[0], coke);
        vendingMachine.registerDrink(buttonAssigned[1], fanta);
        vendingMachine.registerDrink(buttonAssigned[2], sprite);
        out.println("Vending machine set up");

        int totalNumberOfRequests = Integer.parseInt(br.readLine().trim());
        while(totalNumberOfRequests-- > 0){
            arr = br.readLine().split(" ");
            int buttonPressed = Integer.parseInt(arr[0]),
                money = Integer.parseInt(arr[1]);
            try{
                ServeDrinkSummary serveDrinkSummary = vendingMachine.dispatch(buttonPressed, money);
                serveDrinkSummary.servedDrink.serveDrink();
                out.println(serveDrinkSummary.servedDrink.getName() + " " + serveDrinkSummary.change);
            }catch(OutOfStockException e){
                out.println(e.getMessage());
            }catch(InsufficientMoneyException e){
                out.println("Insufficient money");
            }
        }

        out.flush();
        out.close();
    }
}

class Coke implements Drink{
    private int price;
    private String name;
    private int quantityLeft;

    public Coke(int price, String name, int quantityLeft){
        this.price = price;
        this.name = name;
        this.quantityLeft = quantityLeft;
    }

    public int getPrice(){
        return this.price;
    }

    public String getName(){
        return this.name;
    }
```

```

    public int getQuantityLeft(){
        return this.quantityLeft;
    }

    public void serveDrink(){
        this.quantityLeft--;
    }
}

class Fanta implements Drink{
    private int price;
    private String name;
    private int quantityLeft;

    public Fanta(int price, String name, int quantityLeft){
        this.price = price;
        this.name = name;
        this.quantityLeft = quantityLeft;
    }

    public int getPrice(){
        return this.price;
    }

    public String getName(){
        return this.name;
    }

    public int getQuantityLeft(){
        return this.quantityLeft;
    }

    public void serveDrink(){
            this.quantityLeft--;
    }
}

class Sprite implements Drink{
    private int price;
    private String name;
    private int quantityLeft;

    public Sprite(int price, String name, int quantityLeft){
        this.price = price;
        this.name = name;
```

```
        this.quantityLeft = quantityLeft;
    }

    public int getPrice(){
        return this.price;
    }

    public String getName(){
        return this.name;
    }

    public int getQuantityLeft(){
        return this.quantityLeft;
    }

    public void serveDrink(){
            this.quantityLeft--;
    }
}

class Solution{

    public static void main(String[] args) throws IOException{
        String arr[];
        int quantity[] = new int[3], pricePerUnit[] = new int[3], buttonAssigned[] = new int[3];

        BufferedReader br = new BufferedReader(new InputStreamReader(System.in));
        PrintWriter out = new PrintWriter(System.out);

        arr = br.readLine().split(" ");
        for(int i = 0; i < 3; i++){
            quantity[i] = Integer.parseInt(arr[i]);
        }

        arr = br.readLine().split(" ");
        for(int i = 0; i < 3; i++){
            pricePerUnit[i] = Integer.parseInt(arr[i]);
        }

        arr = br.readLine().split(" ");
        for(int i = 0; i < 3; i++){
            buttonAssigned[i] = Integer.parseInt(arr[i]);
        }

```

```
        VendingMachine vendingMachine = new VendingMachine();
        Drink coke = new Coke(pricePerUnit[0], "Coke", quantity[0]);
        Drink fanta = new Fanta(pricePerUnit[1], "Fanta", quantity[1]);
        Drink sprite = new Sprite(pricePerUnit[2], "Sprite", quantity[2]);
        vendingMachine.registerDrink(buttonAssigned[0], coke);
        vendingMachine.registerDrink(buttonAssigned[1], fanta);
        vendingMachine.registerDrink(buttonAssigned[2], sprite);
        out.println("Vending machine set up");

        int totalNumberOfRequests = Integer.parseInt(br.readLine().trim());
        while(totalNumberOfRequests-- > 0){
            arr = br.readLine().split(" ");
            int buttonPressed = Integer.parseInt(arr[0]),
                money = Integer.parseInt(arr[1]);
            try{
                ServeDrinkSummary serveDrinkSummary = vendingMachine.dispatch(buttonPressed, money);
                serveDrinkSummary.servedDrink.serveDrink();
                out.println(serveDrinkSummary.servedDrink.getName() + " " + serveDrinkSummary.change);
            }catch(OutOfStockException e){
                out.println(e.getMessage());
            }catch(InsufficientMoneyException e){
                out.println("Insufficient money");
            }
        }

        out.flush();
        out.close();
    }
}

class Coke implements Drink{
    private int price;
    private String name;
    private int quantityLeft;

    public Coke(int price, String name, int quantityLeft){
        this.price = price;
        this.name = name;
        this.quantityLeft = quantityLeft;
    }

    public int getPrice(){
        return this.price;
    }
```

```java

    public String getName(){
        return this.name;
    }

    public int getQuantityLeft(){
        return this.quantityLeft;
    }

    public void serveDrink(){
        if(this.quantityLeft > 0)
            this.quantityLeft -= 1;
    }
}

class Fanta implements Drink{
    private int price;
    private String name;
    private int quantityLeft;

    public Fanta(int price, String name, int quantityLeft){
        this.price = price;
        this.name = name;
        this.quantityLeft = quantityLeft;
    }

    public int getPrice(){
        return this.price;
    }

    public String getName(){
        return this.name;
    }

    public int getQuantityLeft(){
        return this.quantityLeft;
    }

    public void serveDrink(){
        if(this.quantityLeft > 0)
            this.quantityLeft -= 1;
    }
}

class Sprite implements Drink{
    private int price;
```

```
    private String name;
    private int quantityLeft;

    public Sprite(int price, String name, int quantityLeft){
        this.price = price;
        this.name = name;
        this.quantityLeft = quantityLeft;
    }

    public int getPrice(){
        return this.price;
    }

    public String getName(){
        return this.name;
    }

    public int getQuantityLeft(){
        return this.quantityLeft;
    }

    public void serveDrink(){
        if(this.quantityLeft > 0)
            this.quantityLeft -= 1;
    }
}
```

TESTCASE	DIFFICULTY	TYPE	STATUS	SCORE	TIME TAKEN	MEMORY USED
TestCase 0	Easy	Sample	Success	1	0.0503 sec	38.1 KB
TestCase 1	Easy	Hidden	Success	6	0.045 sec	37 KB
TestCase 2	Easy	Hidden	Success	6	0.0769 sec	39 KB

TestCase 3	Easy	Hidden	Success	6	0.0789 sec	38.9 KB
TestCase 4	Medium	Hidden	Success	10	0.0873 sec	39.2 KB
TestCase 5	Medium	Hidden	Success	10	0.1301 sec	50.7 KB
TestCase 6	Medium	Hidden	Success	10	0.1389 sec	51 KB
TestCase 7	Hard	Hidden	Success	13	0.1348 sec	52.5 KB
TestCase 8	Hard	Hidden	Success	13	0.1164 sec	50.4 KB

No comments.