


pQTL Enrichment by Background Universe

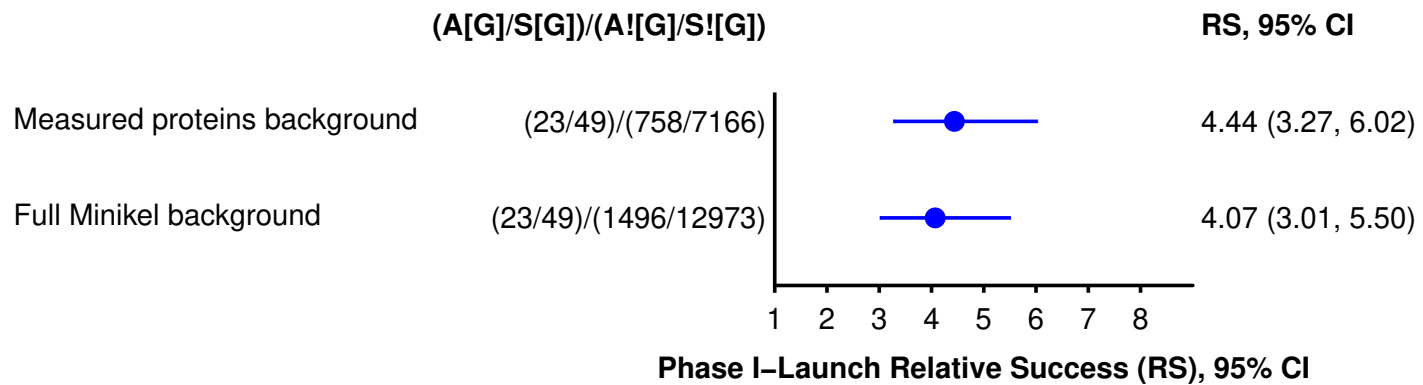

Supplementary Figure S4. Sensitivity analysis comparing Phase I-Launch relative success (RS) of pQTL-supported T-I pairs under two background definitions: (1) measured proteins background, restricted to T-I pairs where the target was assayed on at least one proteomic platform used in the pQTL studies (Olink or SomaScan), matching the main analysis; and (2) full Minikel background, using all T-I pairs from Minikel et al. without restriction to measured proteins. pQTL-supported T-I pairs are identical in both analyses; only the unsupported comparator group changes. $A[G]/S[G]$ = launched/Phase I among pQTL-supported pairs; $A[!G]/S[!G]$ = launched/Phase I among pQTL-unsupported pairs. Error bars: 95% CI (Katz log method).