


Task on RDS


1. Create MariaDB DB on EC2.

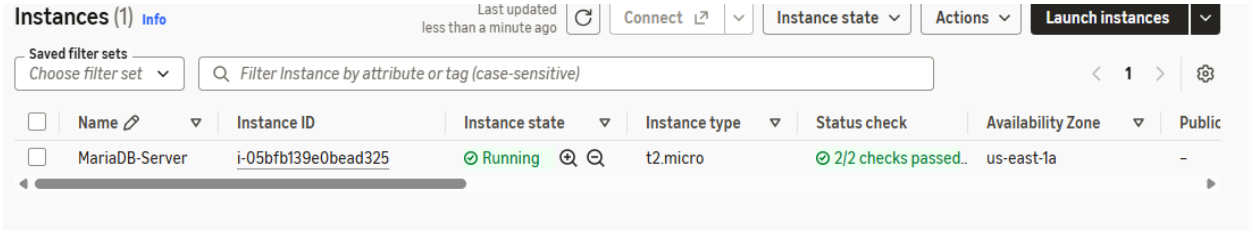


•

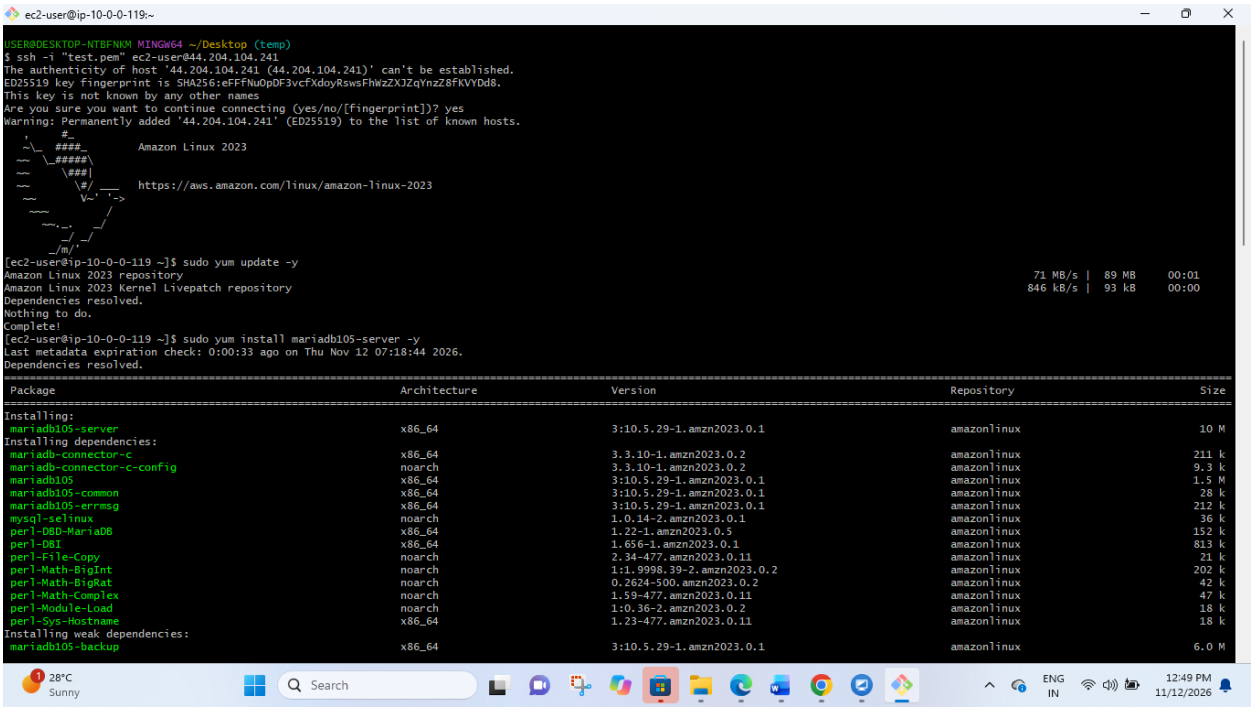

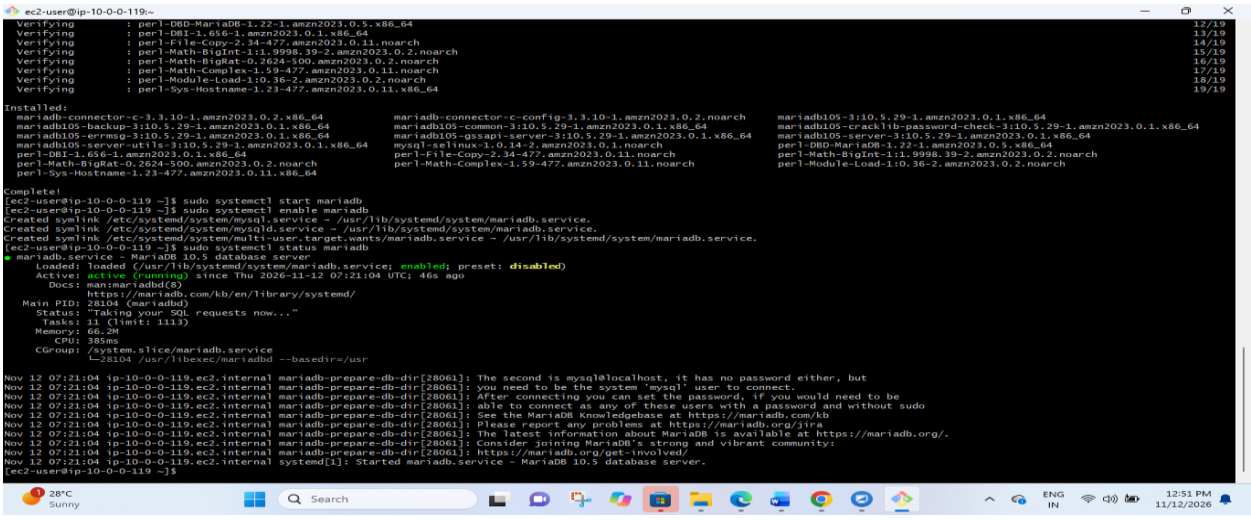


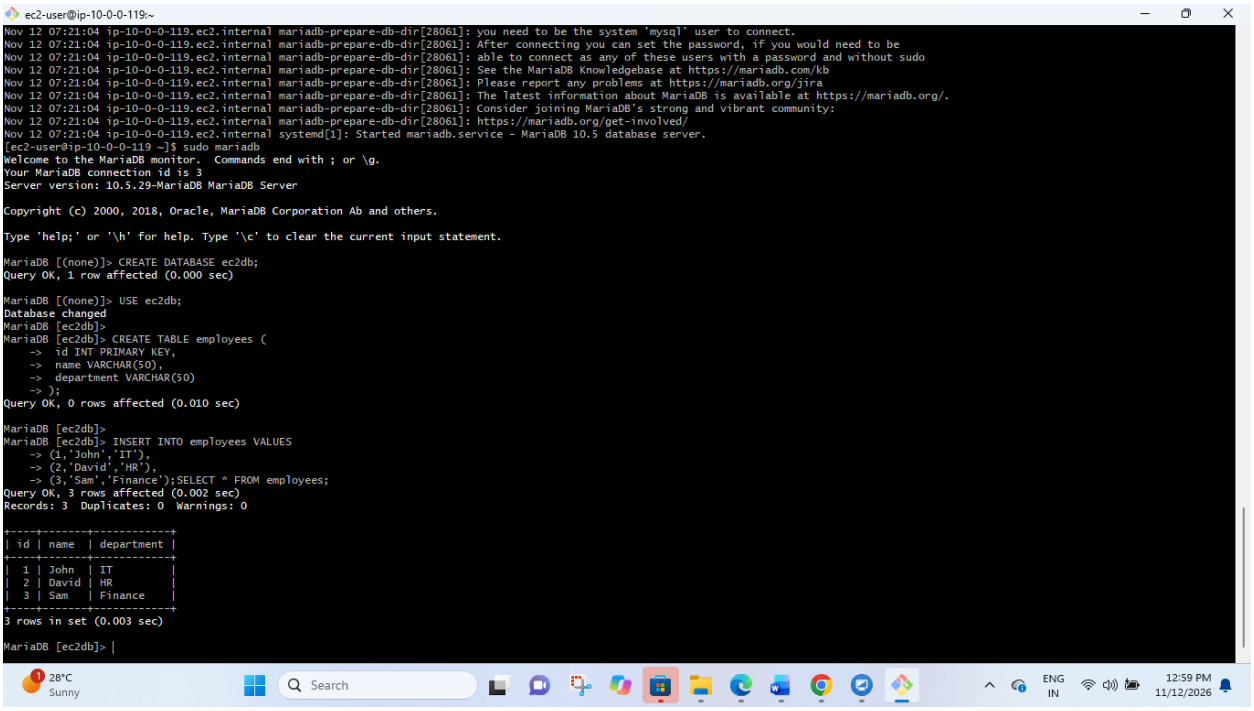


2. Insert some dummy data.

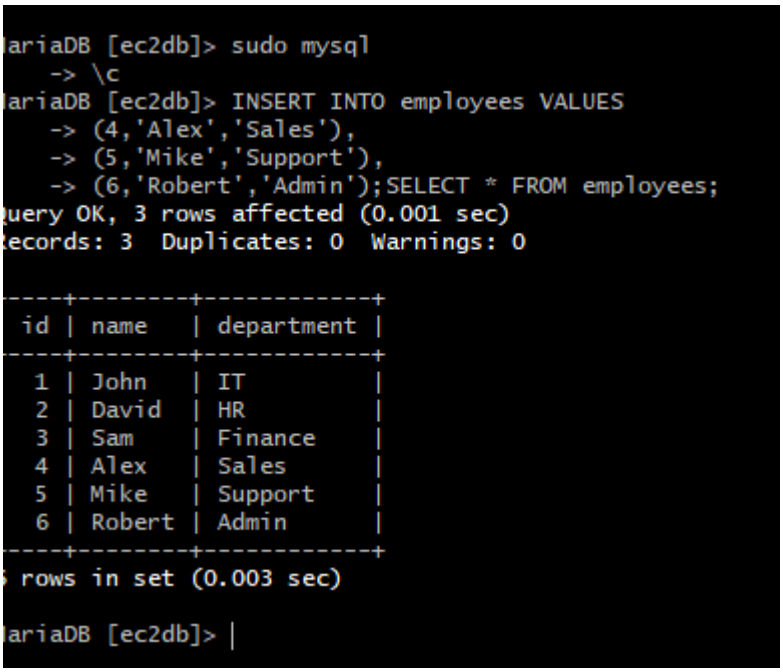


3. Take the backup of dummy data on EC2.

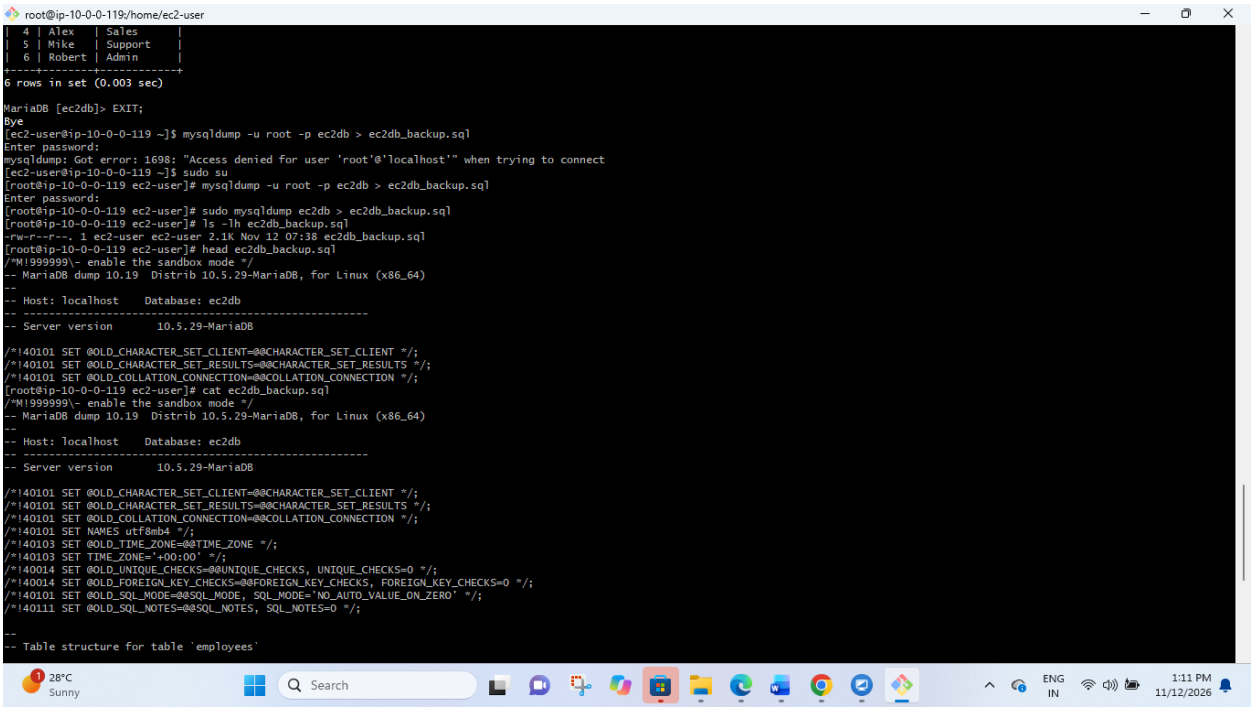



Display backup dp. cat ec2db_backup.sql

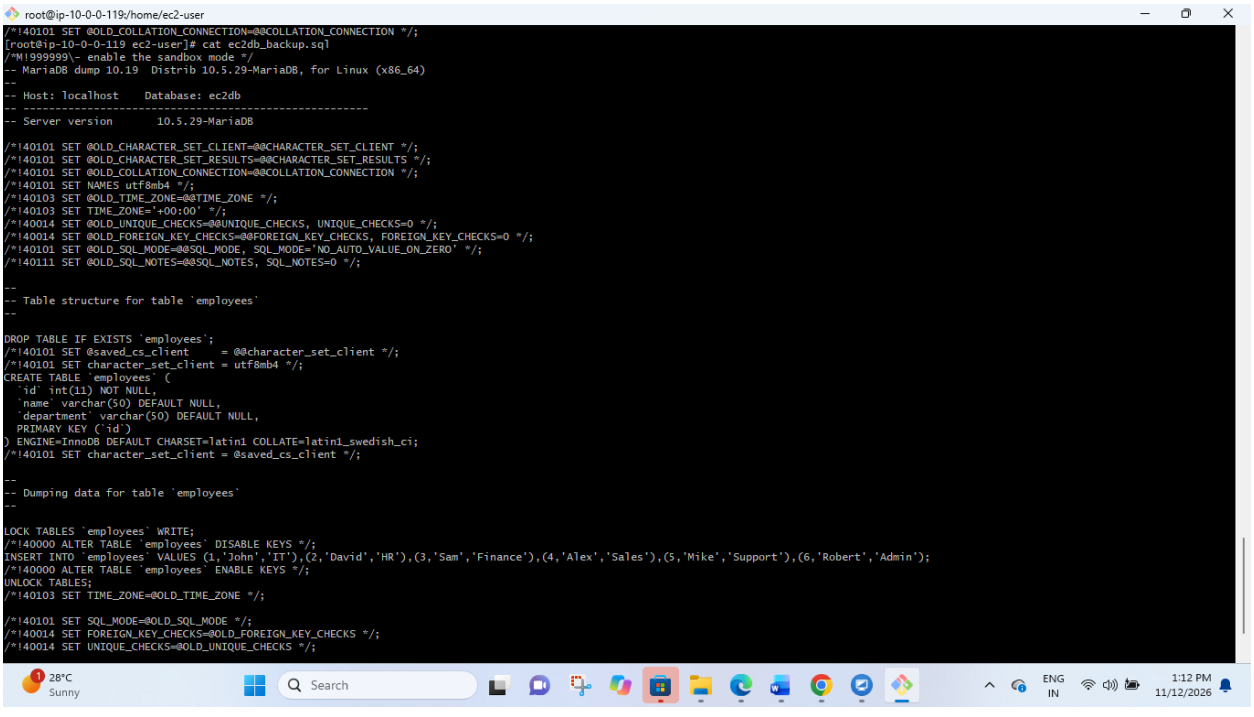

4. Launch MariaDB RDS instance.

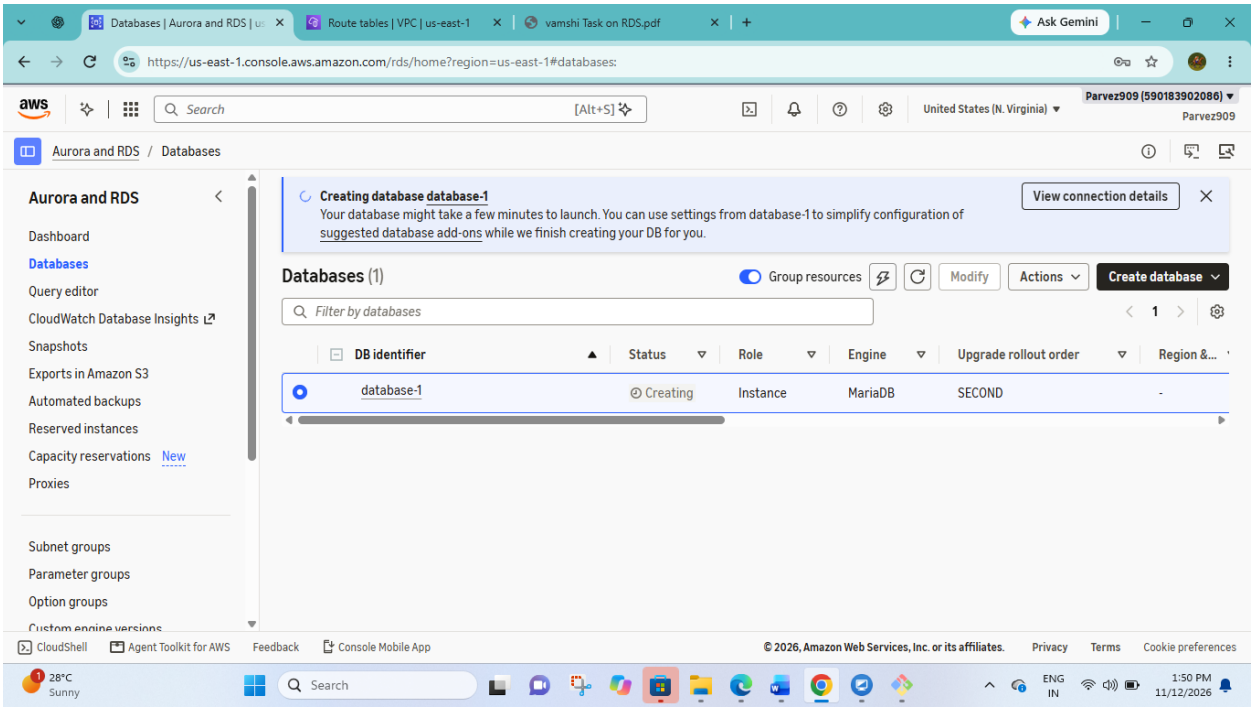
Databases | Aurora and RDS
Route tables | VPC | us-east-1
vamshi Task on RDS.pdf
Ask Gemini
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#databases:
Search [Alt+S]
United States (N. Virginia)
Parvez909 (590183902086)
Parvez909
Aurora and RDS / Databases
Aurora and RDS
Dashboard
Databases
Query editor
CloudWatch Database Insights
Snapshots
Exports in Amazon S3
Automated backups
Reserved instances
Capacity reservations New
Proxies
Subnet groups
Parameter groups
Option groups
Creating database database-1
Your database might take a few minutes to launch. You can use settings from database-1 to simplify configuration of suggested database add-ons while we finish creating your DB for you.
View connection details
Databases (1)
Group resources
Modify
Actions
Create database
Filter by databases
DB identifier
Status
Role
Engine
Upgrade rollout order
Region &...
database-1
Creating
Instance
MariaDB
SECOND
-
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
28°C
Sunny
Search
ENG
IN
1:50 PM
11/12/2026

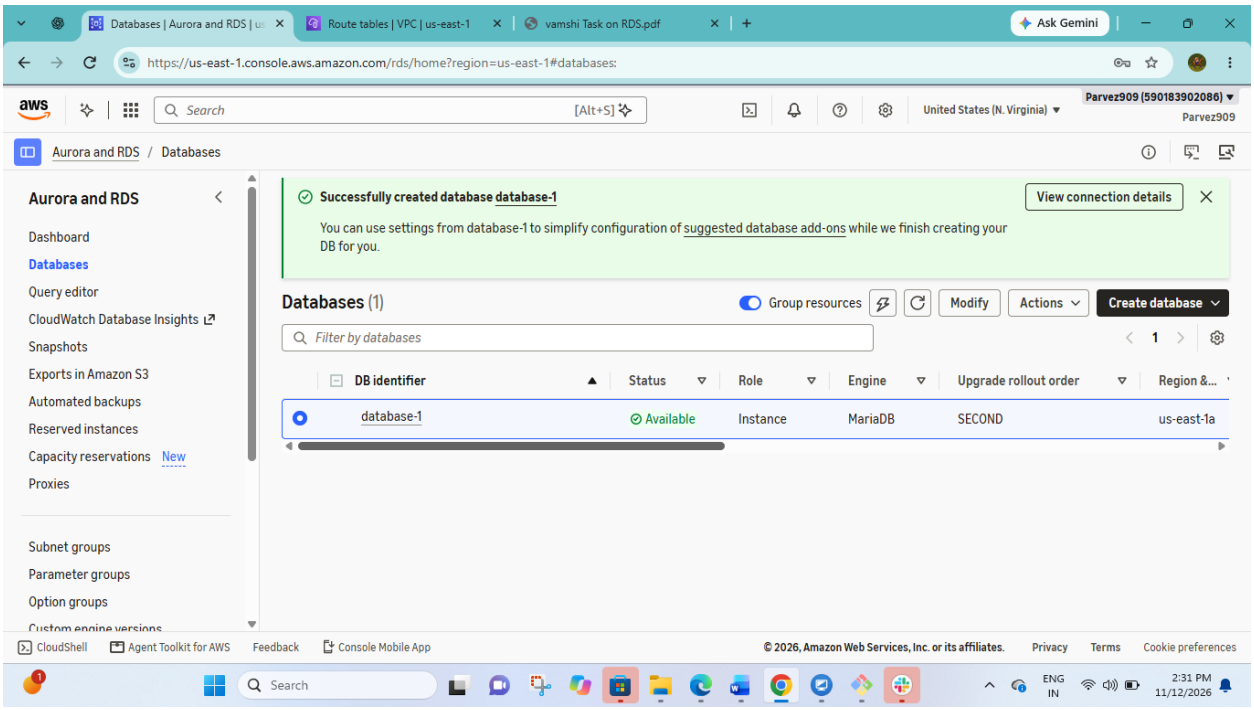
Databases | Aurora and RDS
Route tables | VPC | us-east-1
vamshi Task on RDS.pdf
Ask Gemini
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#databases:
Search [Alt+S]
United States (N. Virginia)
Parvez909 (590183902086)
Parvez909
Aurora and RDS / Databases
Aurora and RDS
Dashboard
Databases
Query editor
CloudWatch Database Insights
Snapshots
Exports in Amazon S3
Automated backups
Reserved instances
Capacity reservations New
Proxies
Subnet groups
Parameter groups
Option groups
Successfully created database database-1
You can use settings from database-1 to simplify configuration of suggested database add-ons while we finish creating your DB for you.
View connection details
Databases (1)
Group resources
Modify
Actions
Create database
Filter by databases
DB identifier
Status
Role
Engine
Upgrade rollout order
Region &...
database-1
Available
Instance
MariaDB
SECOND
us-east-1a
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Search
ENG
IN
2:31 PM
11/12/2026

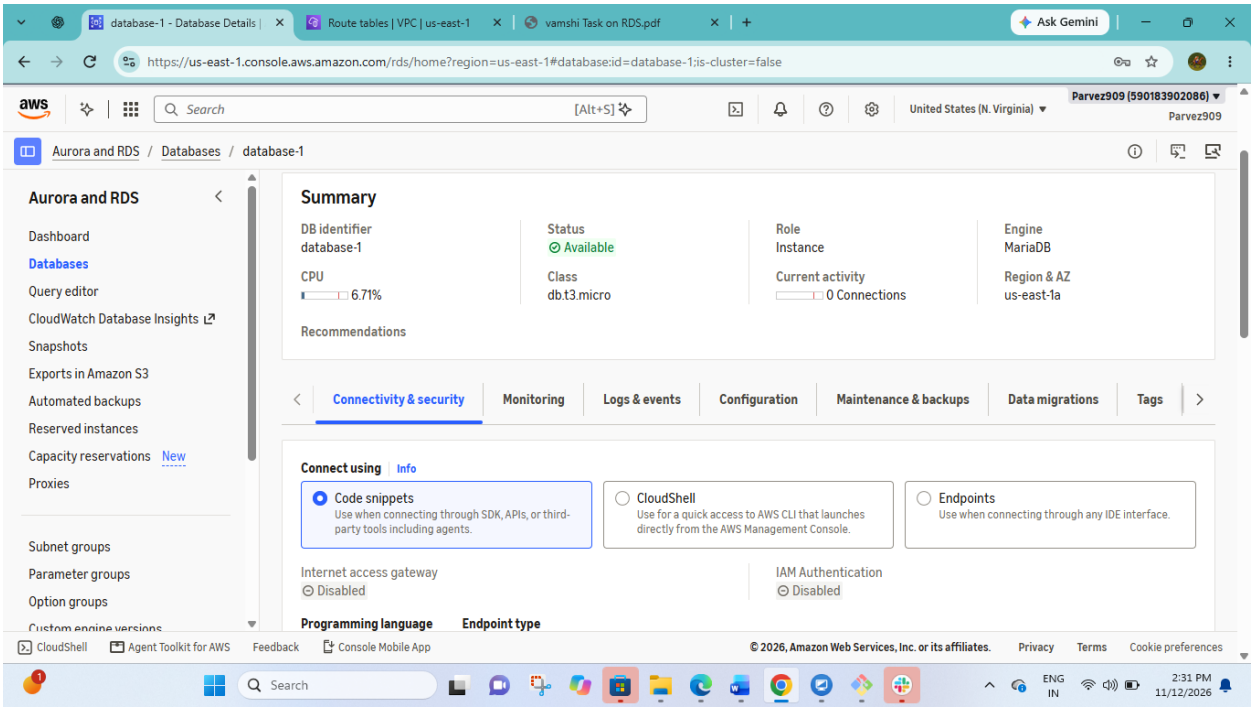

5. Migrate database from EC2 to RDS.

```
[root@ip-10-0-0-119 ec2-user]# mysql -h database-1.cgfwquusuvp0.us-east-1.rds.amazonaws.com -P 3306 -u admin -p
Enter password:
ERROR 3159 (08004): Connections using insecure transport are prohibited while --require_secure_transport=ON.
[root@ip-10-0-0-119 ec2-user]# curl -o global-bundle.pem https://truststore.pki.rds.amazonaws.com/global/global-bundle.pem
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left  Speed
100 170.4k 100 170.4k    0     0  7.82M      0                              0
[root@ip-10-0-0-119 ec2-user]# mysql -h database-1.cgfwquusuvp0.us-east-1.rds.amazonaws.com -P 3306 -u admin -p --ssl-verify-server-cert --ssl-ca=global-bundle.pem
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 136
Server version: 11.8.9-MariaDB-log managed by https://aws.amazon.com/rds/


Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.


MariaDB [(none)]> show database
    -> CREATE DATABASE ec2db;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB server version for the right syntax to use near 'database
CREATE DATABASE ec2db' at line 1
MariaDB [(none)]> CREATE DATABASE ec2db;
Query OK, 1 row affected (0.006 sec)


MariaDB [(none)]> SHOW DATABASES;
+--------------------+
| Database           |
+--------------------+
| ec2db              |
| information_schema |
| innodb             |
| mysql              |
| performance_schema |
| sys                |
+--------------------+
6 rows in set (0.006 sec)


MariaDB [(none)]>
```

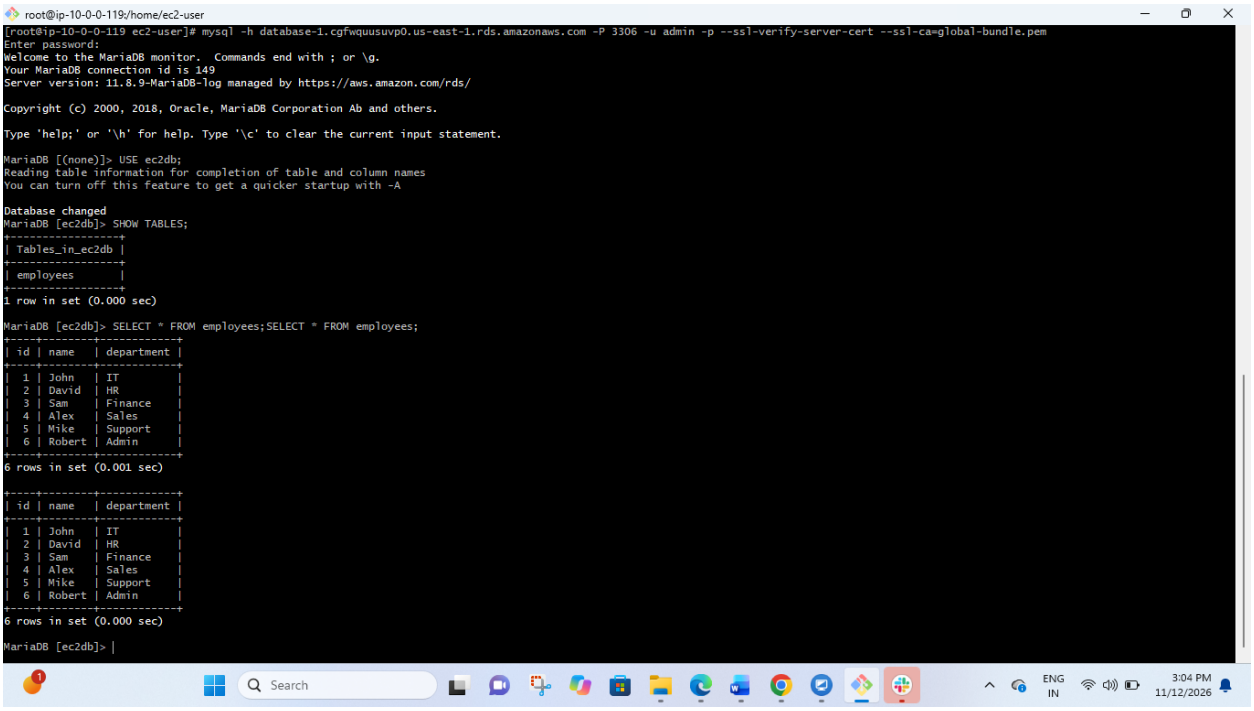


6. Install MySQL DB on EC2.

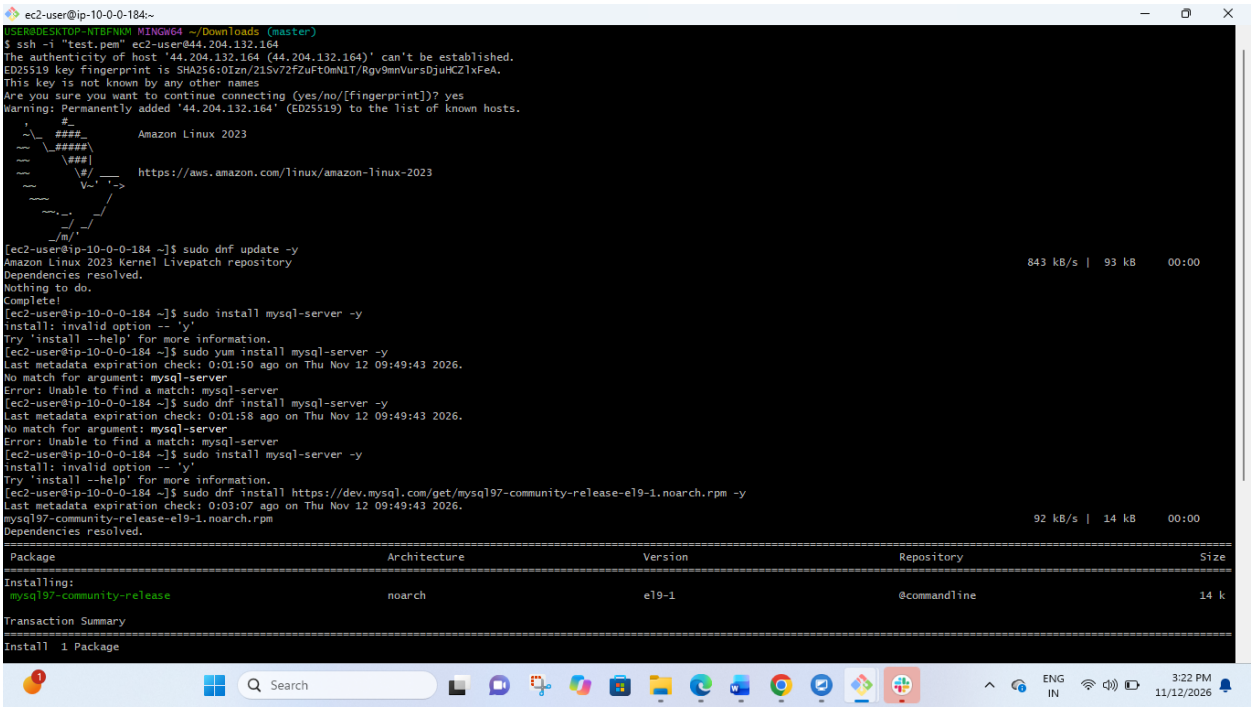


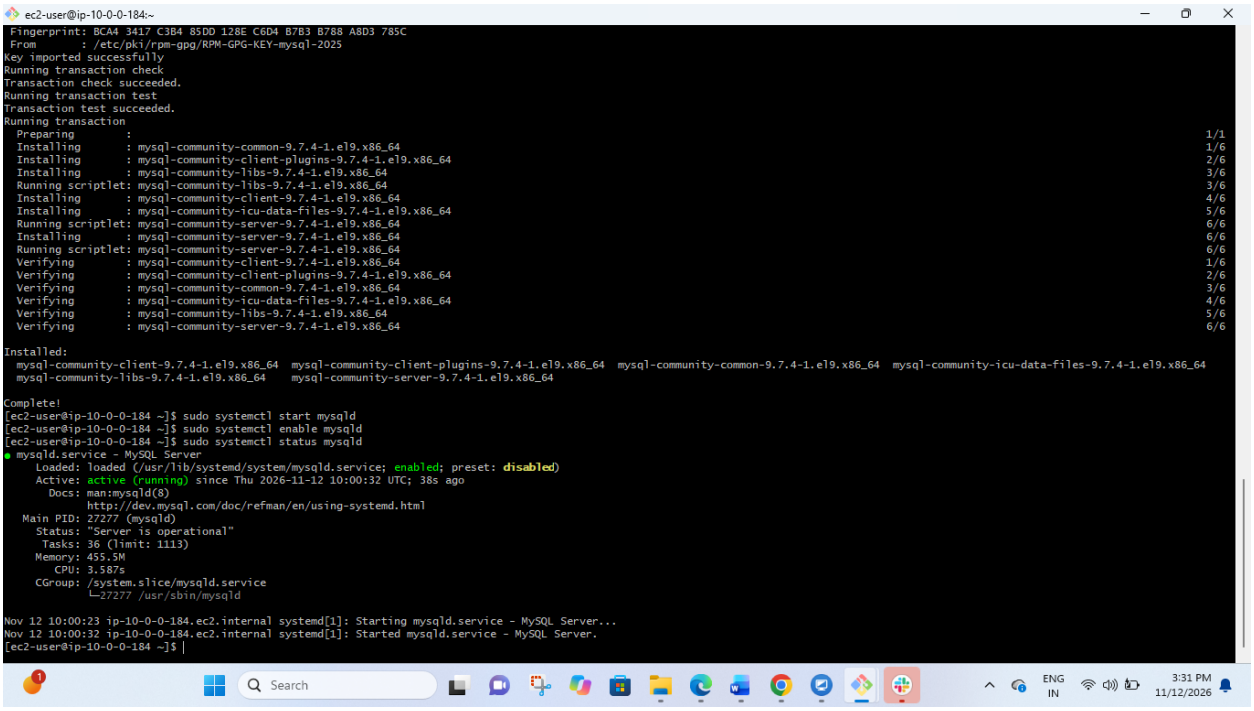

ec2-user@ip-10-0-0-184:~
Fingerprint: BCA4 3417 C3B4 85DD 128E C6D4 B7B3 B788 A8D3 785C
From : /etc/pki/rpm-gpg/RPM-GPG-KEY-mysql-2025
Key imported successfully
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
Preparing : 1/1
Installing : mysql-community-common-9.7.4-1.el9.x86_64 1/6
Installing : mysql-community-client-plugins-9.7.4-1.el9.x86_64 2/6
Installing : mysql-community-libs-9.7.4-1.el9.x86_64 3/6
Running scriptlet: mysql-community-libs-9.7.4-1.el9.x86_64 3/6
Installing : mysql-community-client-9.7.4-1.el9.x86_64 4/6
Installing : mysql-community-icu-data-files-9.7.4-1.el9.x86_64 5/6
Running scriptlet: mysql-community-server-9.7.4-1.el9.x86_64 6/6
Installing : mysql-community-server-9.7.4-1.el9.x86_64 6/6
Running scriptlet: mysql-community-server-9.7.4-1.el9.x86_64 6/6
Verifying : mysql-community-client-9.7.4-1.el9.x86_64 1/6
Verifying : mysql-community-client-plugins-9.7.4-1.el9.x86_64 2/6
Verifying : mysql-community-common-9.7.4-1.el9.x86_64 3/6
Verifying : mysql-community-icu-data-files-9.7.4-1.el9.x86_64 4/6
Verifying : mysql-community-libs-9.7.4-1.el9.x86_64 5/6
Verifying : mysql-community-server-9.7.4-1.el9.x86_64 6/6
Installed:
mysql-community-client-9.7.4-1.el9.x86_64 mysql-community-client-plugins-9.7.4-1.el9.x86_64 mysql-community-common-9.7.4-1.el9.x86_64 mysql-community-icu-data-files-9.7.4-1.el9.x86_64
mysql-community-libs-9.7.4-1.el9.x86_64 mysql-community-server-9.7.4-1.el9.x86_64
Complete!
[ec2-user@ip-10-0-0-184 ~]$ sudo systemctl start mysqld
[ec2-user@ip-10-0-0-184 ~]$ sudo systemctl enable mysqld
[ec2-user@ip-10-0-0-184 ~]$ sudo systemctl status mysqld
mysqld.service - MySQL Server
Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled; preset: disabled)
Active: active (running) since Thu 2026-11-12 10:00:32 UTC; 38s ago
Docs: man:mysqld(8)
http://dev.mysql.com/doc/refman/en/using-systemd.html
Main PID: 27277 (mysqld)
Status: "Server is operational"
Tasks: 36 (limit: 1113)
Memory: 455.5M
CPU: 3.587s
CGroup: /system.slice/mysqld.service
└─27277 /usr/sbin/mysqld
Nov 12 10:00:23 ip-10-0-0-184.ec2.internal systemd[1]: Starting mysqld.service - MySQL Server...
Nov 12 10:00:32 ip-10-0-0-184.ec2.internal systemd[1]: Started mysqld.service - MySQL Server.
[ec2-user@ip-10-0-0-184 ~]$
Search
ENG
IN
3:31 PM
11/12/2026

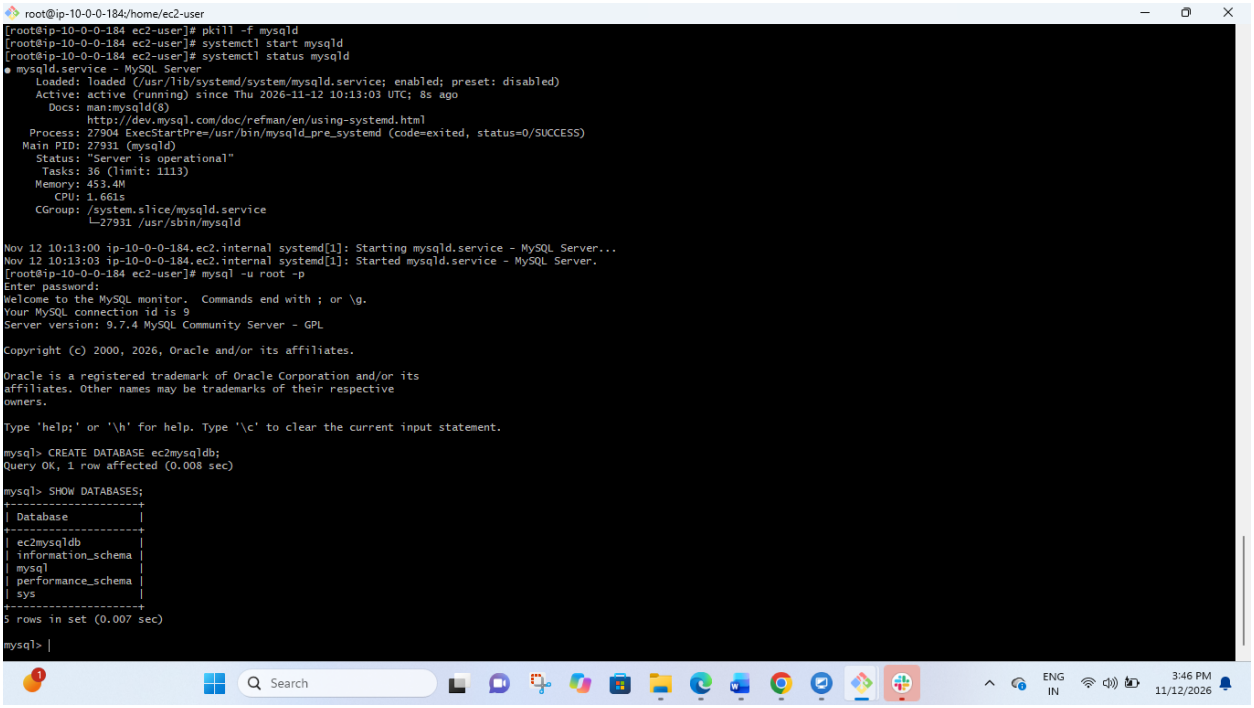

root@ip-10-0-0-184:/home/ec2-user
[root@ip-10-0-0-184 ec2-user]# pkill -f mysqld
[root@ip-10-0-0-184 ec2-user]# systemctl start mysqld
[root@ip-10-0-0-184 ec2-user]# systemctl status mysqld
mysqld.service - MySQL Server
Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled; preset: disabled)
Active: active (running) since Thu 2026-11-12 10:13:03 UTC; 8s ago
Docs: man:mysqld(8)
http://dev.mysql.com/doc/refman/en/using-systemd.html
Process: 27904 ExecStartPre=/usr/bin/mysqld_pre_systemd (code=exited, status=0/SUCCESS)
Main PID: 27931 (mysqld)
Status: "Server is operational"
Tasks: 36 (limit: 1113)
Memory: 453.4M
CPU: 1.661s
CGroup: /system.slice/mysqld.service
└─27931 /usr/sbin/mysqld
Nov 12 10:13:00 ip-10-0-0-184.ec2.internal systemd[1]: Starting mysqld.service - MySQL Server...
Nov 12 10:13:03 ip-10-0-0-184.ec2.internal systemd[1]: Started mysqld.service - MySQL Server.
[root@ip-10-0-0-184 ec2-user]# mysql -u root -p
Enter password:
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 9
Server version: 9.7.4 MySQL Community Server - GPL
Copyright (c) 2000, 2026, Oracle and/or its affiliates.
Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
mysql> CREATE DATABASE ec2mysqldb;
Query OK, 1 row affected (0.008 sec)
mysql> SHOW DATABASES;
+--------------------+
| Database |
+--------------------+
| ec2mysqldb |
| information_schema |
| mysql |
| performance_schema |
| sys |
+--------------------+
5 rows in set (0.007 sec)
mysql>
Search
ENG
IN
3:46 PM
11/12/2026

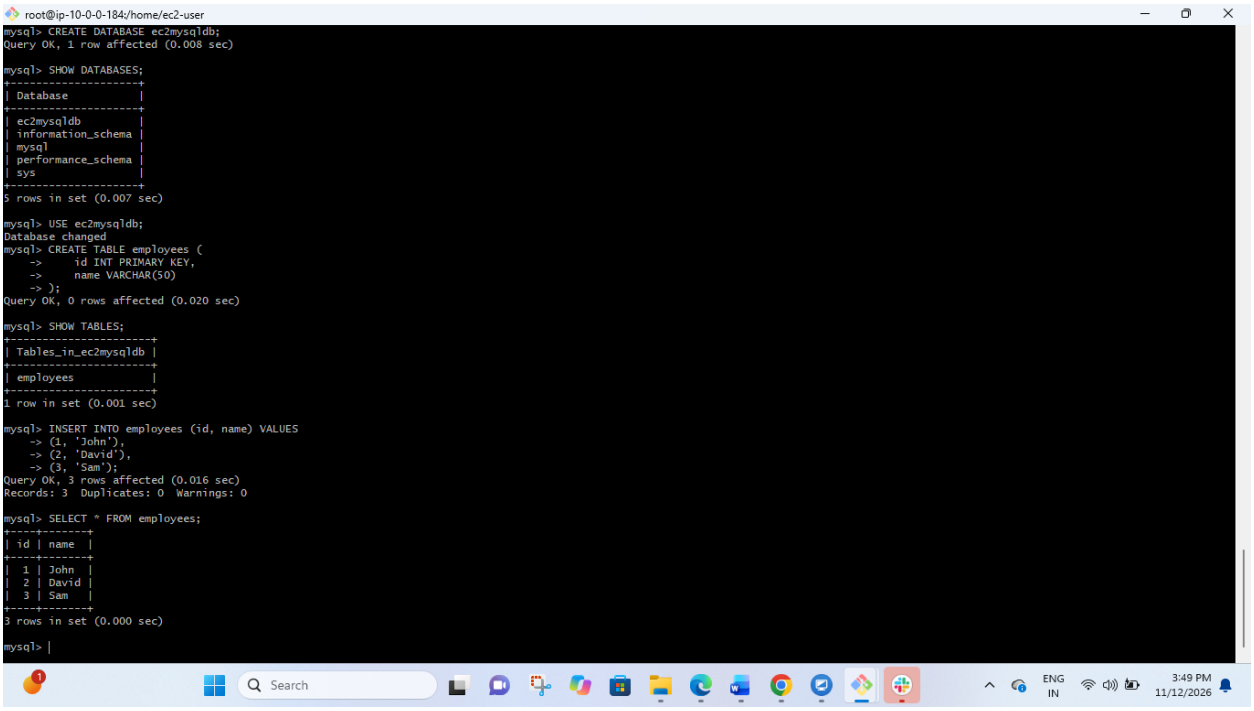

7. Launch MySQL RDS image.

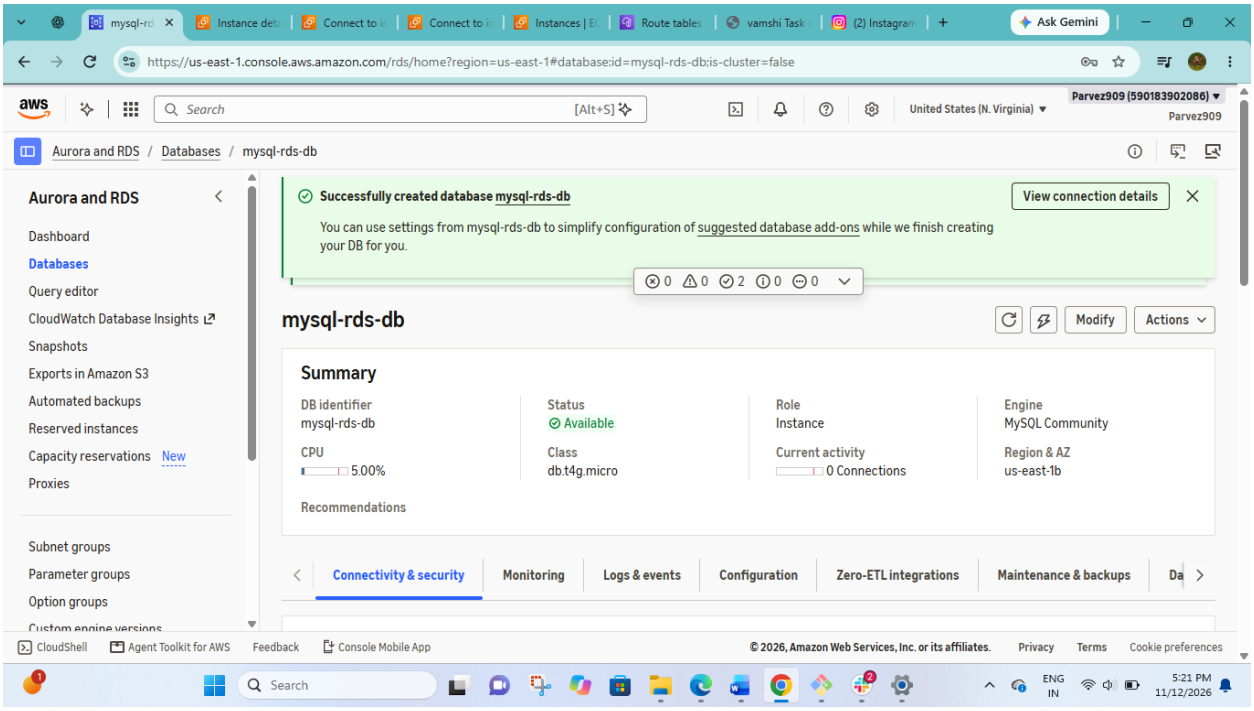

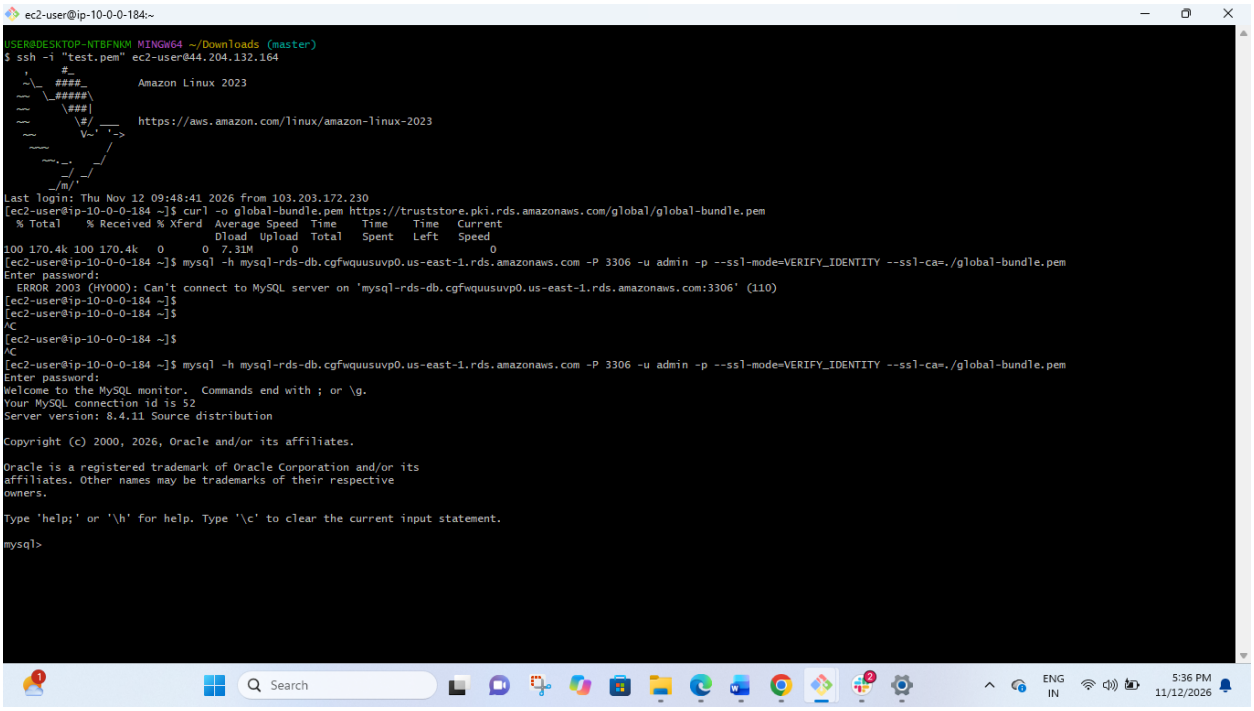


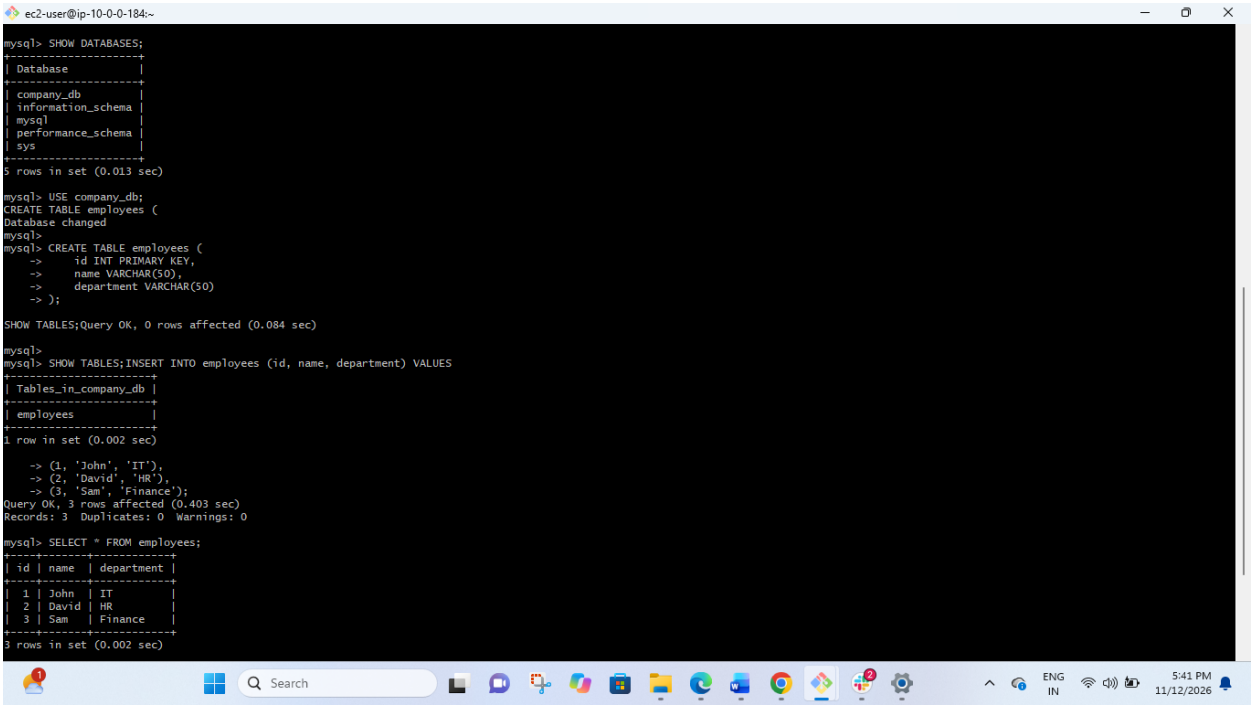



8. Configure Multi-AZ.


Cost warning: Multi-AZ increases your RDS cost because AWS maintains a standby database in another Availability Zone. Check the estimated cost before applying.

9. Take backup of DB and restore the DB.

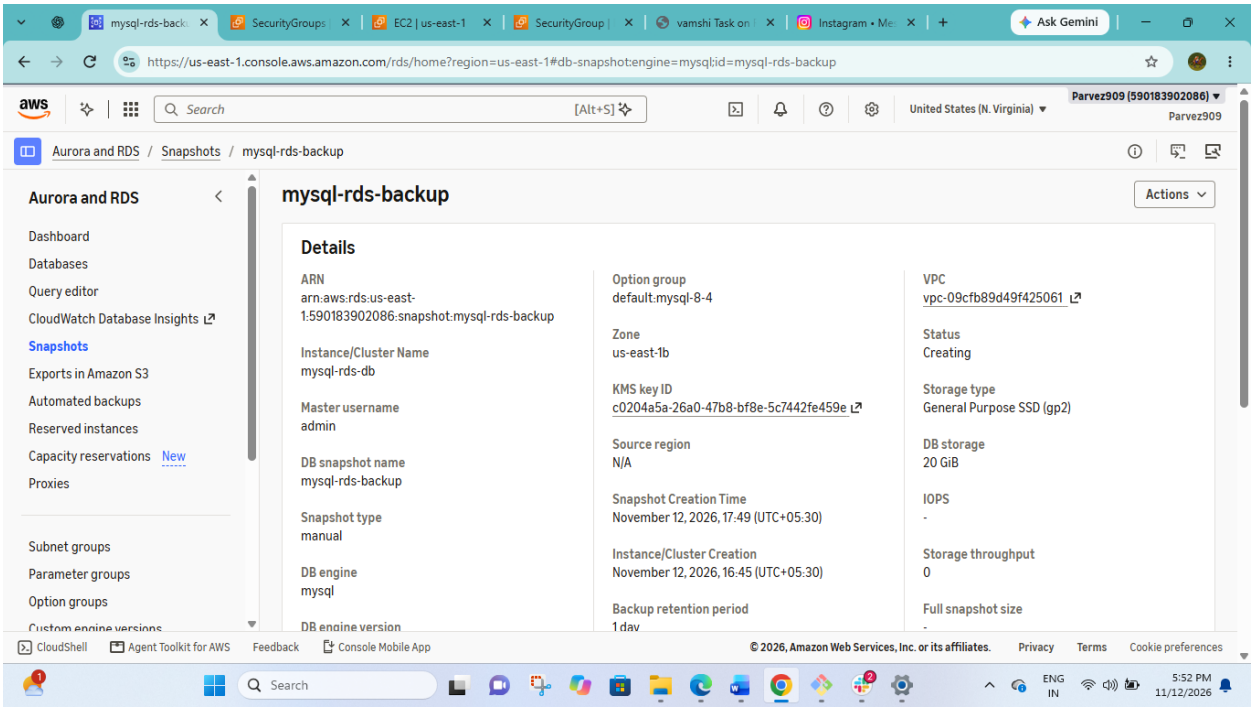


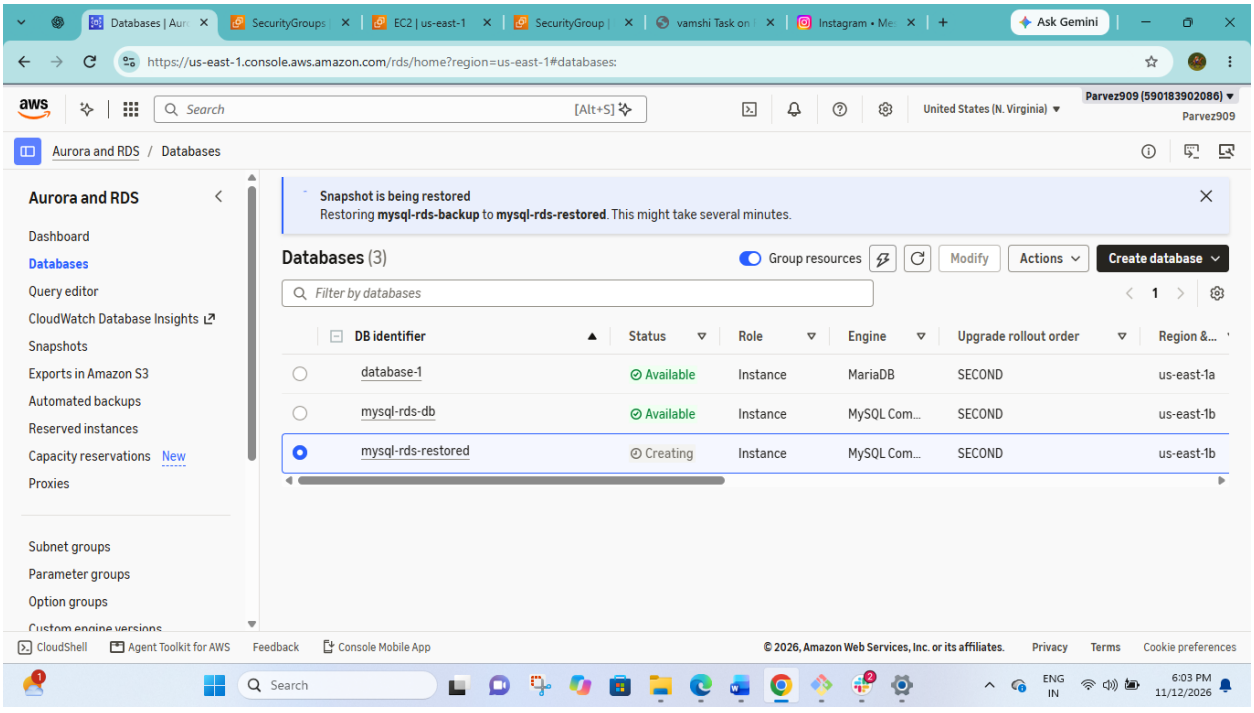


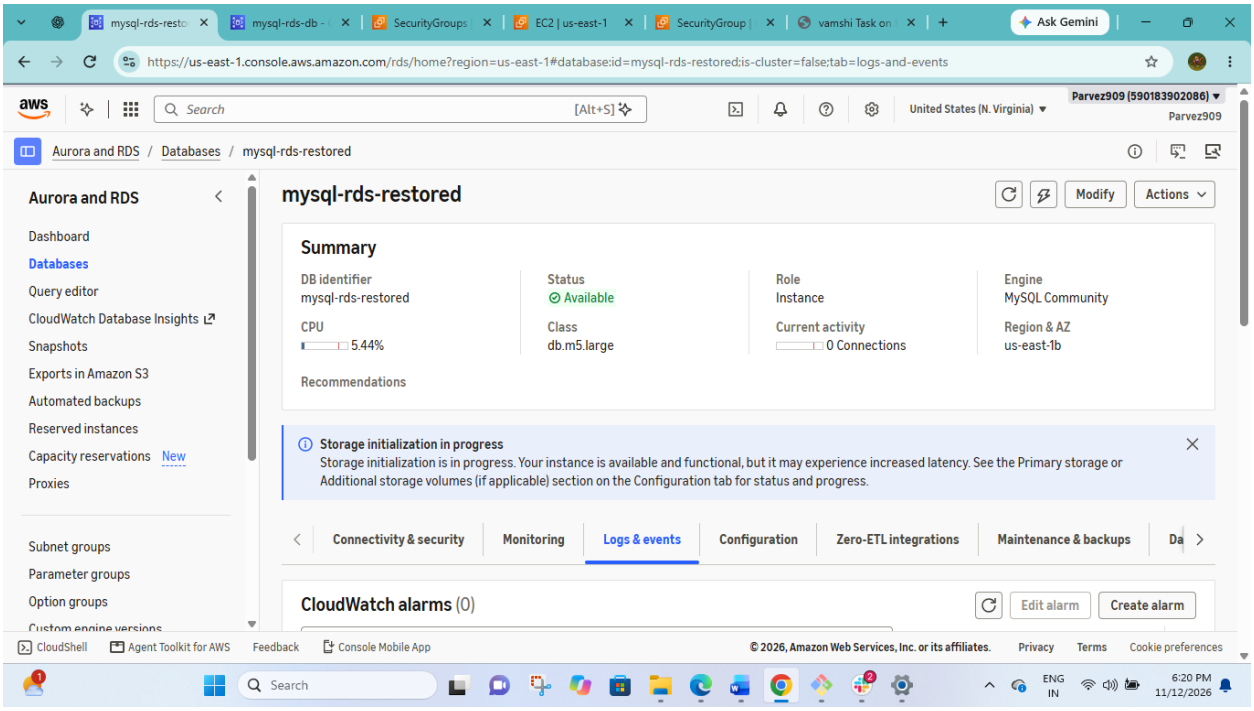


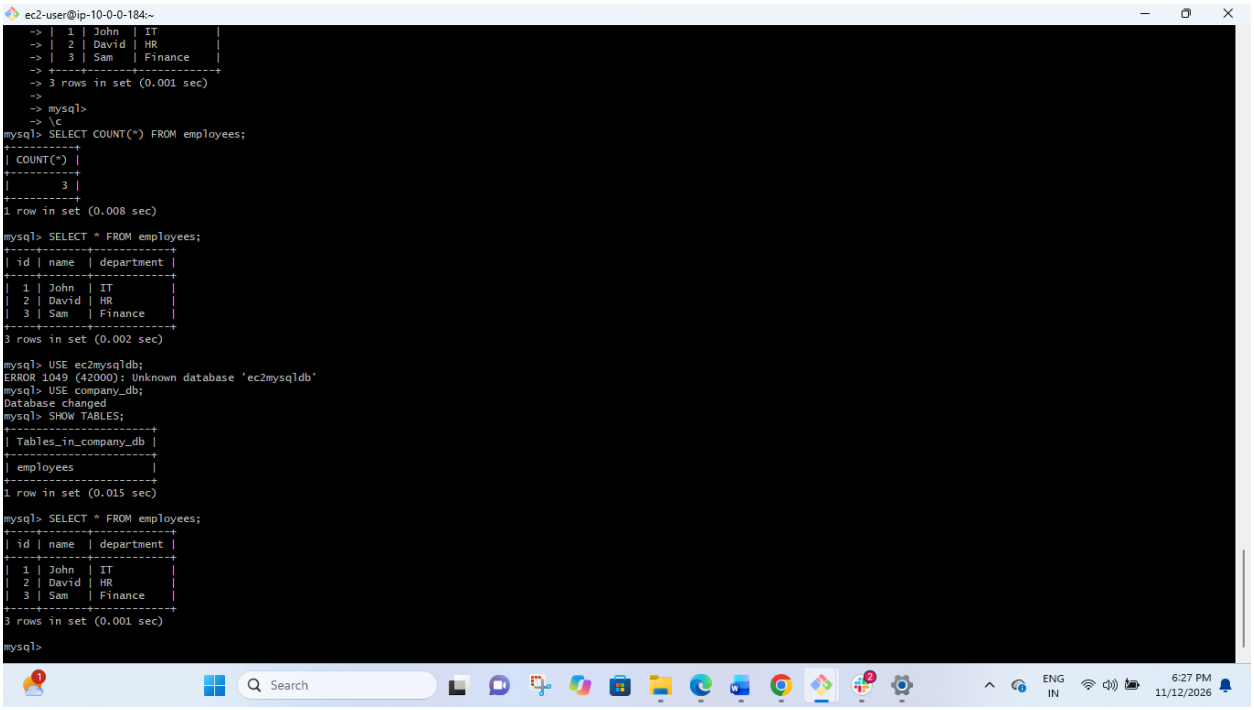

10. Create read replica.

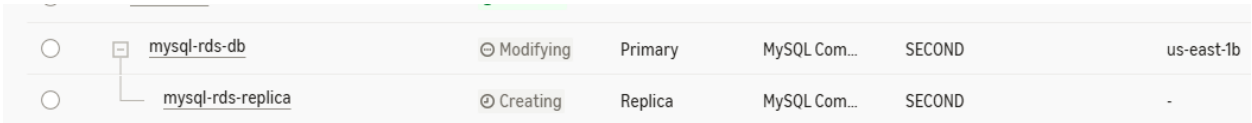

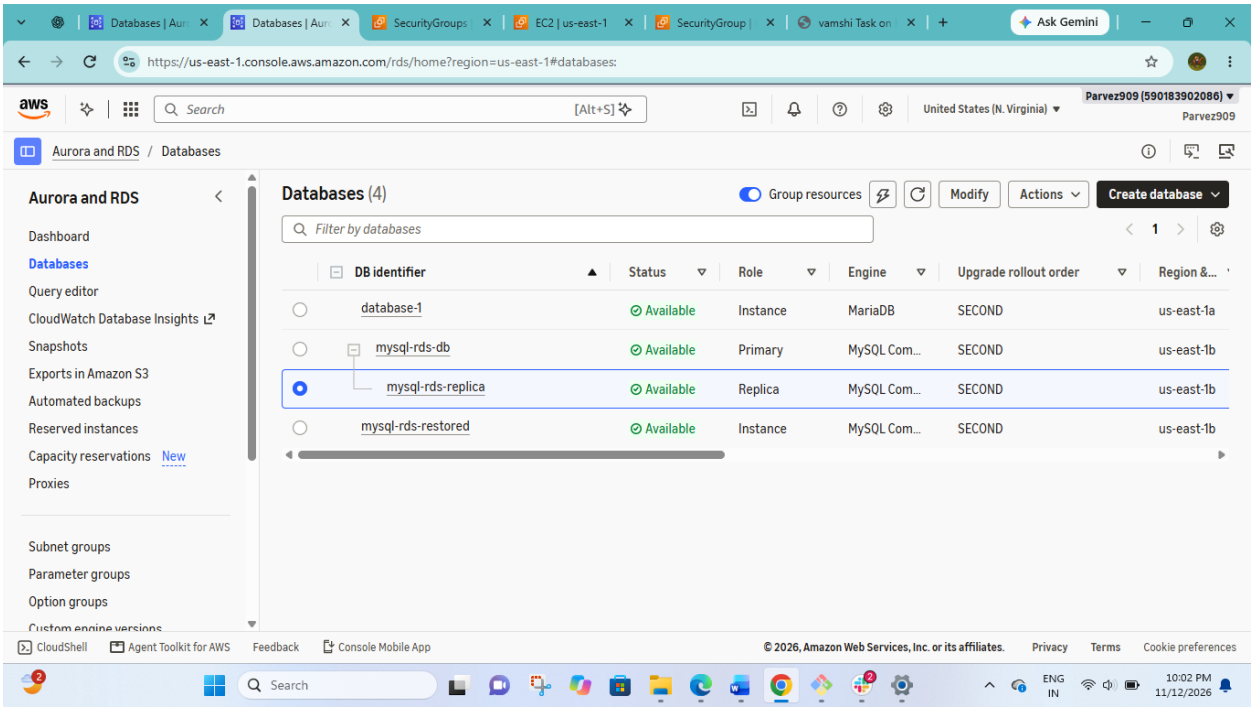
Databases | Aur
Databases | Aur
SecurityGroups
EC2 | us-east-1
SecurityGroup
vamshi Task on
Ask Gemini
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#databases:
aws
Search
[Alt+S]
United States (N. Virginia)
Parvez909 (590183902086)
Parvez909
Aurora and RDS / Databases
Aurora and RDS
Dashboard
Databases
Query editor
CloudWatch Database Insights
Snapshots
Exports in Amazon S3
Automated backups
Reserved instances
Capacity reservations New
Proxies
Subnet groups
Parameter groups
Option groups
Custom engine versions
Databases (4)
Group resources
Modify
Actions
Create database
Filter by databases
DB identifier
Status
Role
Engine
Upgrade rollout order
Region &...
database-1
Available
Instance
MariaDB
SECOND
us-east-1a
mysql-rds-db
Available
Primary
MySQL Com...
SECOND
us-east-1b
mysql-rds-replica
Available
Replica
MySQL Com...
SECOND
us-east-1b
mysql-rds-restored
Available
Instance
MySQL Com...
SECOND
us-east-1b
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Search
ENG
IN
10:02 PM
11/12/2026

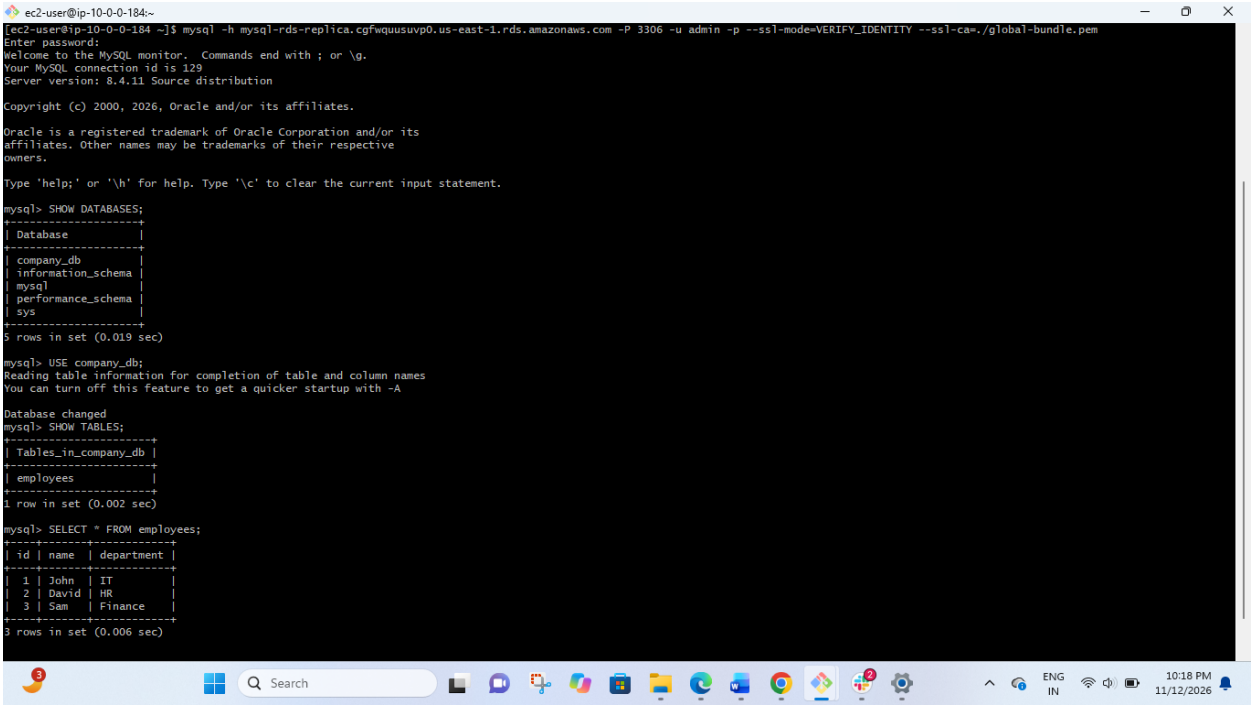
ec2-user@ip-10-0-0-184:~
[ec2-user@ip-10-0-0-184 ~]$ mysql -h mysql-rds-replica.cgfwquusuvp0.us-east-1.rds.amazonaws.com -P 3306 -u admin -p --ssl-mode=VERIFY_IDENTITY --ssl-ca=./global-bundle.pem
Enter password:
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 129
Server version: 8.4.11 Source distribution
Copyright (c) 2000, 2026, Oracle and/or its affiliates.
Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
mysql> SHOW DATABASES;
+--------------------+
| Database |
+--------------------+
| company_db |
| information_schema |
| mysql |
| performance_schema |
| sys |
+--------------------+
5 rows in set (0.019 sec)
mysql> USE company_db;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A
Database changed
mysql> SHOW TABLES;
+----------------------+
| Tables_in_company_db |
+----------------------+
| employees |
+----------------------+
1 row in set (0.002 sec)
mysql> SELECT * FROM employees;
+----+-------+------------+
| id | name | department |
+----+-------+------------+
1	John	IT
2	David	HR
3	Sam	Finance
+----+-------+------------+
3 rows in set (0.006 sec)
Search
ENG
IN
10:18 PM
11/12/2026