

Phase 2 Week 7 Home Assignment - Selenium to Playwright Converter

On Form Submission

The screenshot shows the 'On form submission' workflow configuration in n8n. The left pane displays a form titled 'Pull in a test form submission' with an 'Execute step' button. The right pane shows the configuration for the 'Execute step' with the following parameters:

- Form URLs:** Test URL: `http://localhost:5678/form-test/04e4aabb-e8e3-4c59-84c4-24879818a970`, Production URL: (empty)
- Authentication:** None
- Form Title:** Selenium to Playwright Framework Converter
- Form Description:** Enter a GitHub repository containing a Selenium Java framework and receive a Playwright TestScript framework as a ZIP
- Form Elements:** Text Input (Label: GitHub Repository URL), Element Type: (empty)

The OUTPUT pane shows the resulting JSON data:

```
{  "GitHub Repository URL": "https://github.com/Harrish-sdet/CRM/tree/main/CRM_25-main/CRM_25-main",  "Branch": "",  "submittedAt": "2026-09-18T13:51:28.131-04:00",  "formMode": "test"}
```

Edit Fields

The screenshot shows the 'Edit Fields' workflow configuration in n8n. The left pane displays the INPUT data:

```
{  "GitHub Repository URL": "https://github.com/Harrish-sdet/CRM/tree/main/CRM_25-main/CRM_25-main",  "Branch": "",  "submittedAt": "2026-09-18T13:51:28.131-04:00",  "formMode": "test"}
```

The right pane shows the configuration for the 'Execute step' with the following parameters:

- String:** `{{ $json["GitHub Repository URL"].split('/')[3] }}`
- branch:** `{{ ($json["Branch"] || '').trim() | (($json["GitHub Repository URL"].match(/\/tree\/([^\/]+)/) || [])[1] || 'main') }}`
- repo:** `{{ $json["GitHub Repository URL"].split('/')[4].replaceAll('.git', '') }}`
- subfolder:** (empty)

The OUTPUT pane shows the resulting JSON data:

```
{  "owner": "Harrish-sdet",  "branch": "main",  "repo": "CRM",  "subfolder": "CRM_25-main/CRM_25-main"}
```

HTTP Request

The screenshot shows the 'HTTP Request' workflow configuration in n8n. The left pane displays the INPUT data:

```
{  "owner": "Harrish-sdet",  "branch": "main",  "repo": "CRM",  "subfolder": "CRM_25-main/CRM_25-main"}
```

The right pane shows the configuration for the 'HTTP Request' step with the following parameters:

- Method:** GET
- URL:** `https://api.github.com/repos/{{ $json.owner }}/{{ $json.repo }}/git/trees/{{ $json.branch }}?recursive=1`
- Authentication:** None
- Send Query Parameters:** (checked)
- Send Headers:** (checked)
- Specify Headers:** Using Fields Below
- Headers:** Accept: application/vnd.github.v3+json

The OUTPUT pane shows the resulting JSON data:

```
{  "sha": "c8d0568c60545e898ed205098d448571f33a02b",  "url": "https://api.github.com/repos/Harrish-sdet/CRM/git/trees/c8d0568c60545e898ed205098d448571f33a02b",  "tree": [    {      "path": "CRM_25-main",      "mode": "040000",      "type": "tree",      "sha": "d8aa258e6923c478bcd6abe8af6d81a68f193ac",      "url": "https://api.github.com/repos/Harrish-sdet/CRM/git/trees/d8aa258e6923c478bcd6abe8af6d81a68f193ac"    },    {      "path": "CRM_25-main/CRM_25-main",      "mode": "040000",      "type": "tree",      "sha": "19e2b30d89275b6389413afb67a505cde9ce04b5",      "url": "https://api.github.com/repos/Harrish-sdet/CRM/git/trees/19e2b30d89275b6389413afb67a505cde9ce04b5"    },    {      "path": "CRM_25-main/CRM_25-main/CRM_25-main",      "mode": "040000",      "type": "tree"    }  ]}
```

Split Out

Split Out

INPUT: HTTP Request (1 item)

Parameters: Fields To Split Out: tree

OUTPUT: 103 items

Node executed successfully

Filter

Filter

INPUT: Split Out (103 items)

Parameters: Conditions: blob, AND, ends with .java

OUTPUT: Kept (20 items), Discarded (83 items)

Node executed successfully

Filter 1 segregating pages and test cases

Filter1

INPUT: Filter (20 items)

Parameters: Conditions: contains /pages/, OR, contains /testcases/

OUTPUT: Kept (10 items), Discarded (10 items)

Node executed successfully

Switch

The screenshot shows the configuration of a **Switch** node. The **INPUT** tab displays a list of 10 items. The **Parameters** tab shows two routing rules:

- Routing Rule 1:** Contains the condition `contains /pages/`. The **Output Name** is **Pages**.
- Routing Rule 2:** Contains the condition `contains /testcases/`. The **Output Name** is **Testcases**.

The **OUTPUT** tab shows the results of the switch, with two branches: **Pages (5 items)** and **Testcases (5 items)**. The **Pages** branch contains 5 items, and the **Testcases** branch contains 5 items.

Loop Over Items


The screenshot shows the configuration of a **Loop Over Items** node. The **INPUT** tab displays a list of 5 items. The **Parameters** tab shows the **Batch Size** set to 1. The **OUTPUT** tab shows the results of the loop, with two branches: **Done Branch** and **Loop Branch (1 item)**. The **Loop Branch** contains 1 item.

HTTP Request 1



The screenshot shows the configuration of an **HTTP Request** node. The **INPUT** tab displays a list of 1 item. The **Parameters** tab shows the **URL** set to `https://api.github.com/repos/{{ $('Edit Fields').first().json.owner }}/{{ $('Edit Fields').first().json.repo }}/content/s/{{ $('json.path')?ref={{ $('Edit Fields').first().json.branch }}`. The **Authentication** is set to **None**. The **Send Headers** checkbox is checked. The **Specify Headers** dropdown is set to **Using Fields Below**. The **Headers** section shows a table with one header:

Name
Accept

The **OUTPUT** tab shows the results of the HTTP request, with a single item containing the **data** field.

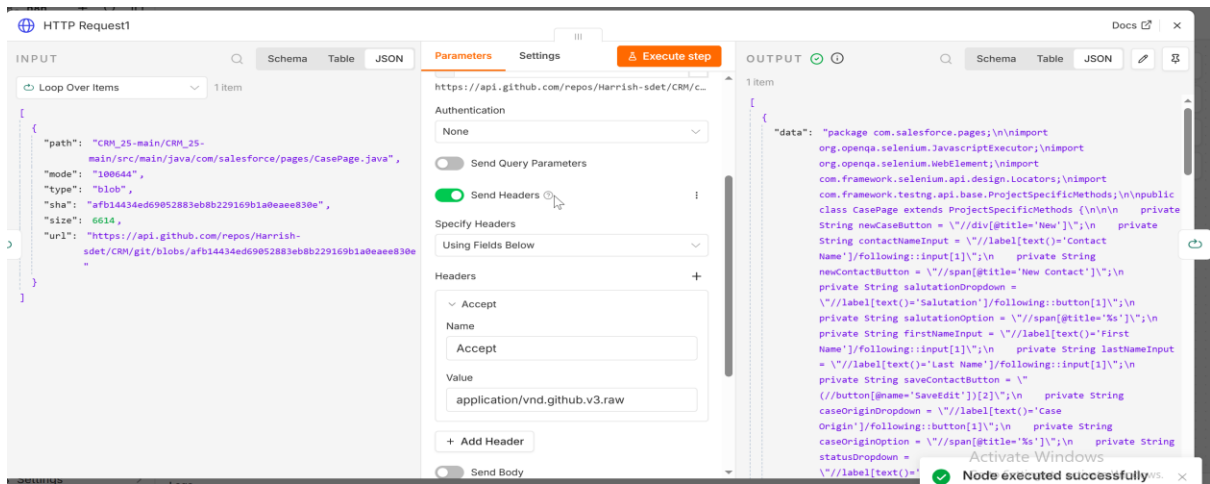

AI AGENT along with Groq Added. The output shows the Playwright with Typescript

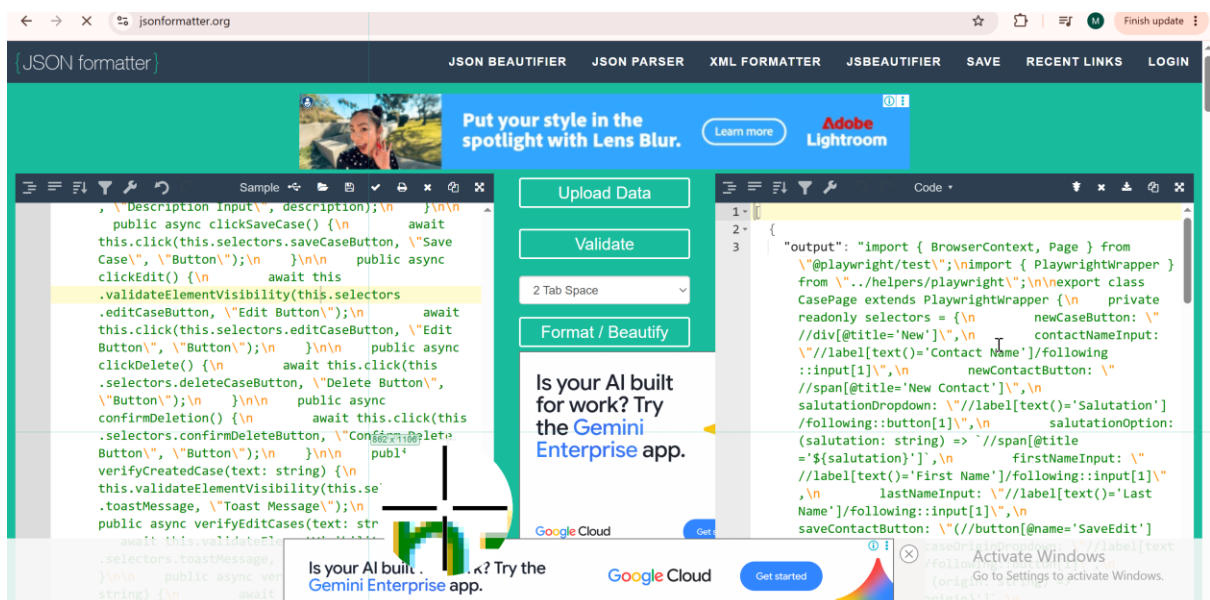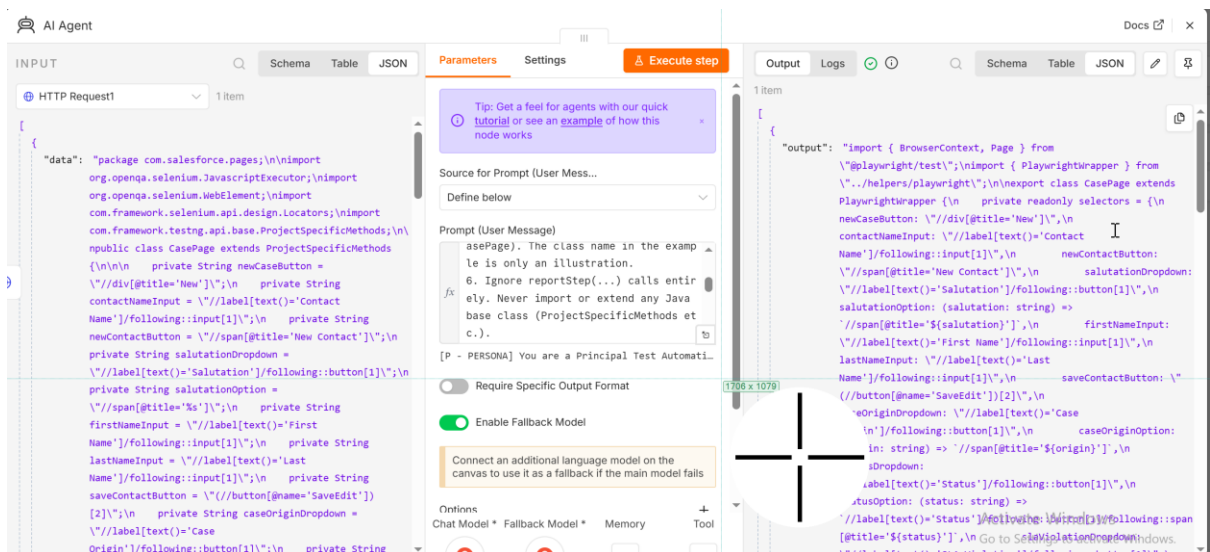

Convert to File

`{{ $('Loop Over Items').item.json.path.split('pages/')[1].replace('.java','') }}.txt`

The screenshot shows the 'Convert to File' tool interface. The 'INPUT' tab displays a JSON object with a 'data' field. The 'Parameters' tab is active, showing the 'Convert to Text File' operation. The 'Text Input Field' is set to 'output'. The 'Put Output File in Field' is set to 'data'. The 'File Name' field contains the expression: `{{ $('Loop Over Items').item.json.path.split('pages/')[1].replace('.java','') }}.txt`. The 'OUTPUT' tab shows the result: 'CasePage.txt' with a file size of 5.47 kB. A 'View' button is visible next to the output.

Click View shows the code

The screenshot shows the 'Convert to File' tool interface. The 'INPUT' tab displays a JSON object with a 'data' field. The 'Parameters' tab is active, showing the 'Convert to Text File' operation. The 'Text Input Field' is set to 'output'. The 'Put Output File in Field' is set to 'data'. The 'File Name' field contains the expression: `{{ $('Loop Over Items').item.json.path.split('pages/')[1].replace('.java','') }}.txt`. The 'OUTPUT' tab shows the result: 'CasePage.txt' with a file size of 5.47 kB. A 'View' button is visible next to the output.

Downloaded CasePage.txt file

The screenshot shows a workflow editor interface. The 'INPUT' section on the left contains a single item 'AI Agent'. The 'Parameters' section in the center has the 'Operation' set to 'Convert to Text File'. The 'Text Input Field' is 'output', and the 'Put Output File in Field' is 'data'. The 'File Name' is set to a JavaScript expression: ``${('Loop Over Items').item.json.path.split('pages/')[1].replace('.java','.')}${(salutation)}``. The 'OUTPUT' section on the right shows the resulting file details: File Name: CasePage.txt, File Extension: txt, Mime Type: text/plain, File Size: 5.47 kB. There are 'View' and 'Download' buttons.

The screenshot shows a Notepad window titled 'CasePage - Notepad' with the following content:


```
import { BrowserContext, Page } from "@playwright/test";
import { PlaywrightWrapper } from "../helpers/playwright";

export class CasePage extends PlaywrightWrapper {
  private readonly selectors = {
    contactNameInput: "//*[@title='New']",
    newCaseButton: "//*[@title='New Contact']",
    salutationDropdown: "//*[@label[text()='Salutation']/following::button[1]",
    salutationOption: (salutation: string) => `//*[@title='${salutation}']`,
    firstNameInput: "//*[@label[text()='First Name']/following::input[1]",
    lastNameInput: "//*[@label[text()='Last Name']/following::input[1]",
    saveContactButton: "//*[@button[@name='SaveEdit']][2]",
    caseOriginDropdown: "//*[@label[text()='Case Origin']/following::button[1]",
    caseOriginOption: (origin: string) => `//*[@title='${origin}']`,
    statusDropdown: "//*[@label[text()='Status']/following::button[1]",
    slaViolationDropdown: "//*[@label[text()='SLA Violation']/following::button[1]",
    slaViolationOption: (value: string) => `//*[@label[text()='SLA Violation']/following::span[text()='${value}']`,
    subjectInput: "//*[@label[text()='Subject']/following::input[1]",
    descriptionInput: "//*[@label[text()='Description']/following::textarea[1]",
    saveCaseButton: "//*[@button[@name='SaveEdit']][1]",
    editCaseButton: "//*[@button[text()='Edit']]",
    deleteCaseButton: "//*[@button[text()='Delete']]",
  };
}
```


Wait for 30 seconds

The screenshot shows a workflow editor interface. The 'INPUT' section on the left shows the 'Convert to File' step output. The 'Parameters' section in the center has the 'Resume' set to 'After Time Interval', 'Wait Amount' set to '30.00', and 'Wait Unit' set to 'Seconds'. The 'OUTPUT' section on the right shows 'No output data' and an 'Execute step' button.

Call Test_Case_Converter workflow

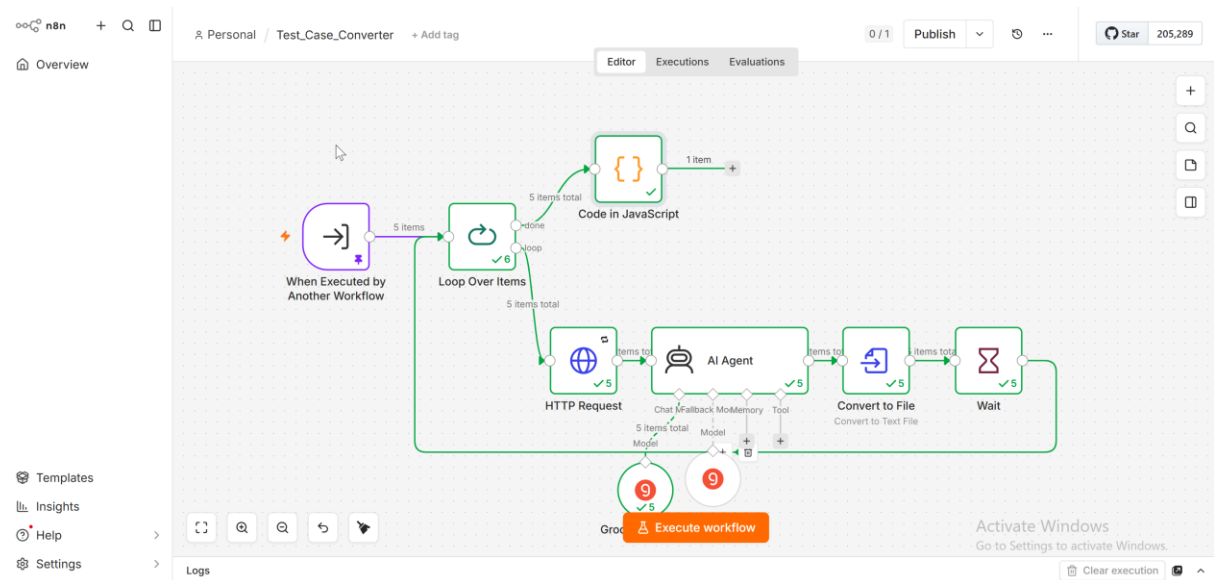

Merge

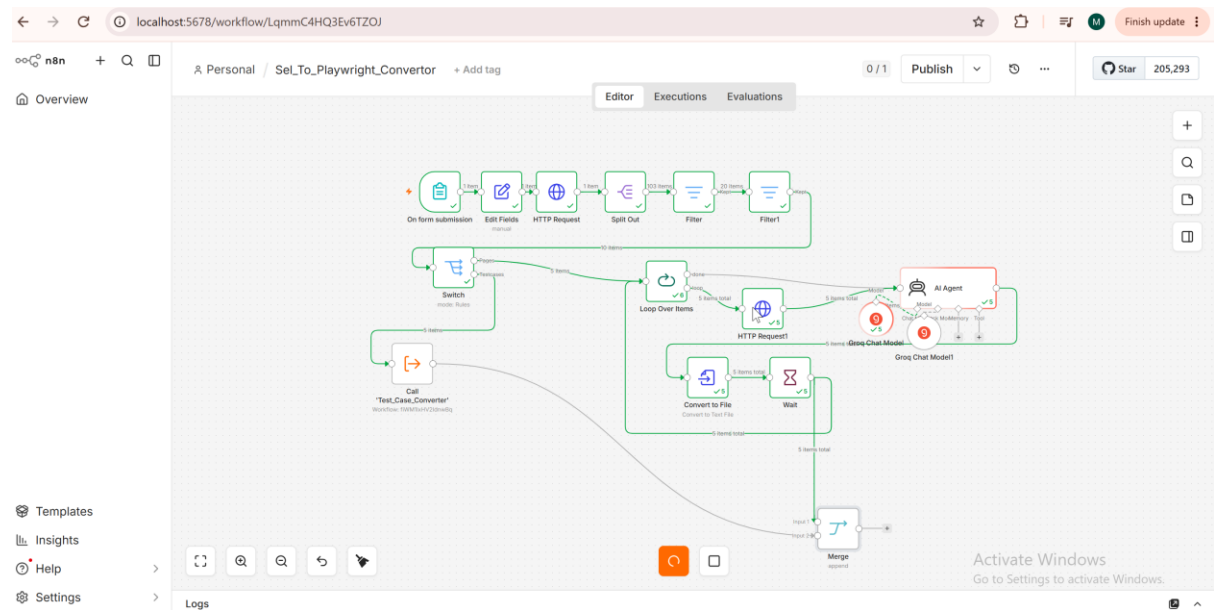

Compression

Compression

INPUT

Schema Table JSON

Parameters Settings Execute step

Operation: Compress

Input Binary Field(s): {{\$son.binaryFields }}

Output Format: Zip

File Name: playwright_framework.zip

Put Output File in Field: data

OUTPUT

Schema Table JSON


No output data

Execute step

or set mock data

Activate Windows

Execute Flow

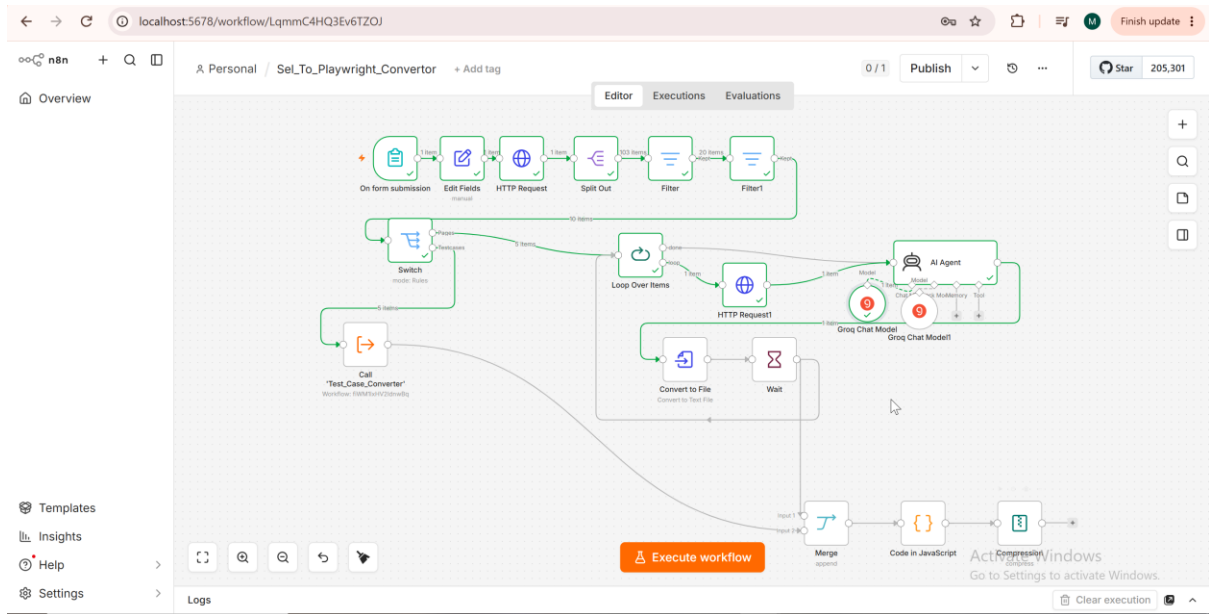

Selenium to Playwright Framework Converter - Google Chrome

localhost:5678/form-test/04e4aabb-e8e3-4c59-84c4-2487d818a970

This is a test version of your form

Selenium to Playwright Framework Converter

Enter a GitHub repository containing a Selenium Java framework and receive a Playwright TypeScript framework as a ZIP.

GitHub Repository URL

n/Harrish-sdet/CRM/tree/main/CRM_25-main/CRM_25-main

Branch

main

Submit

Form automated with  n8n