


SQL OPERATORS:

Arithmetic Operators:

Addition:

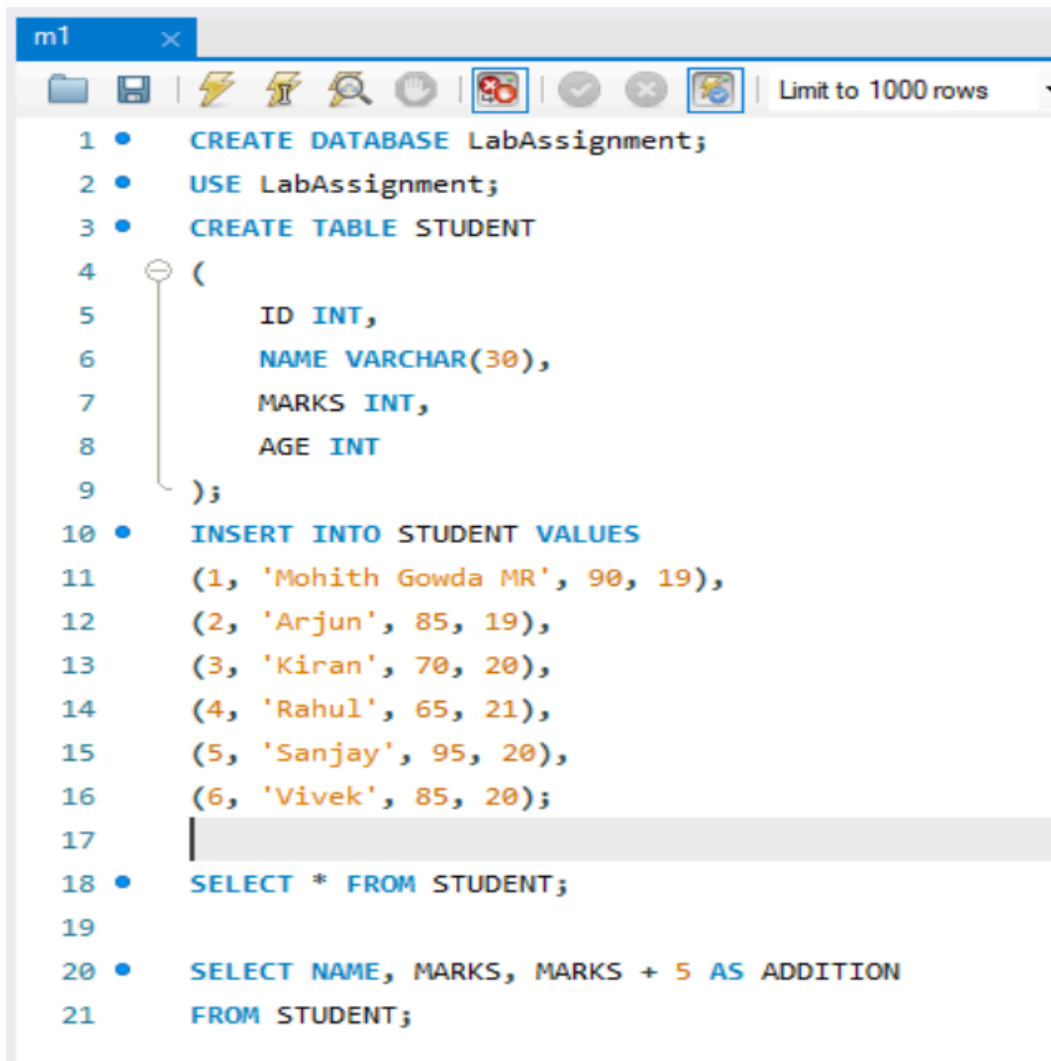

```
m1
1 • CREATE DATABASE LabAssignment;
2 • USE LabAssignment;
3 • CREATE TABLE STUDENT
4 • (
5 •     ID INT,
6 •     NAME VARCHAR(30),
7 •     MARKS INT,
8 •     AGE INT
9 • );
10 • INSERT INTO STUDENT VALUES
11 • (1, 'Mohith Gowda MR', 90, 19),
12 • (2, 'Arjun', 85, 19),
13 • (3, 'Kiran', 70, 20),
14 • (4, 'Rahul', 65, 21),
15 • (5, 'Sanjay', 95, 20),
16 • (6, 'Vivek', 85, 20);
17
18 • SELECT * FROM STUDENT;
19
20 • SELECT NAME, MARKS, MARKS + 5 AS ADDITION
21 • FROM STUDENT;
```

OUTPUT

	NAME	MARKS	ADDITION
	Mohith Gowda MR	90	95
	Arjun	85	90
	Kiran	70	75
	Rahul	65	70
	Sanjay	95	100
	Vivek	85	90

Subtraction:

```
m1 x
Limit to 1000 rows
1 • CREATE DATABASE IF NOT EXISTS LAB5;
2   USE LAB5;
3
4   DROP TABLE IF EXISTS STUDENT;
5
6   CREATE TABLE STUDENT
7   (
8       ID INT,
9       NAME VARCHAR(30),
10      MARKS INT,
11      AGE INT
12  );
13
14  INSERT INTO STUDENT VALUES
15  (1, 'Mohith Gowda MR', 90, 19),
16  (2, 'Arjun', 85, 19),
17  (3, 'Rohan', 70, 20),
18  (4, 'Rahul', 65, 21),
19  (5, 'Vivek', 85, 20);
20
21 • SELECT NAME, MARKS, MARKS - 5 AS SUBTRACTION
22 FROM STUDENT;
```

OUTPUT

	NAME	MARKS	SUBTRACTION
►	Mohith Gowda MR	90	85
	Arjun	85	80
	Rohan	70	65
	Rahul	65	60
	Vivek	85	80

Multiplication:

```
m1 x
[Icons] | Limit to 1000 rows
1 • CREATE DATABASE IF NOT EXISTS LAB5;
2   USE LAB5;
3
4   DROP TABLE IF EXISTS STUDENT;
5
6   CREATE TABLE STUDENT
7   (
8       ID INT,
9       NAME VARCHAR(30),
10      MARKS INT,
11      AGE INT
12  );
13 • INSERT INTO STUDENT VALUES
14  (1, 'Mohith Gowda MR', 90, 19),
15  (2, 'Arjun', 85, 19),
16  (3, 'Rohan', 70, 20),
17  (4, 'Rahul', 65, 21),
18  (5, 'Vivek', 85, 20);
19
20 • SELECT NAME, MARKS, MARKS * 2 AS MULTIPLICATION
21   FROM STUDENT;
```

OUTPUT

	NAME	MARKS	MULTIPLICATION
►	Mohith Gowda MR	90	180
	Arjun	85	170
	Rohan	70	140
	Rahul	65	130
	Vivek	85	170


Division:

```
m1
1 • CREATE DATABASE IF NOT EXISTS LAB5;
2   USE LAB5;
3
4   DROP TABLE IF EXISTS STUDENT;
5
6   CREATE TABLE STUDENT
7   (
8       ID INT,
9       NAME VARCHAR(30),
10      MARKS INT,
11      AGE INT
12  );
13
14 • INSERT INTO STUDENT VALUES
15   (1, 'Mohith Gowda MR', 90, 19),
16   (2, 'Arjun', 85, 19),
17   (3, 'Rohan', 70, 20),
18   (4, 'Rahul', 65, 21),
19   (5, 'Vivek', 85, 20);
20
21 • SELECT NAME, MARKS, MARKS / 2 AS DIVISION
22 FROM STUDENT;
```

OUTPUT

	NAME	MARKS	DIVISION
▶	Mohith Gowda MR	90	45.0000
	Arjun	85	42.5000
	Rohan	70	35.0000
	Rahul	65	32.5000
	Vivek	85	42.5000

Reminder:

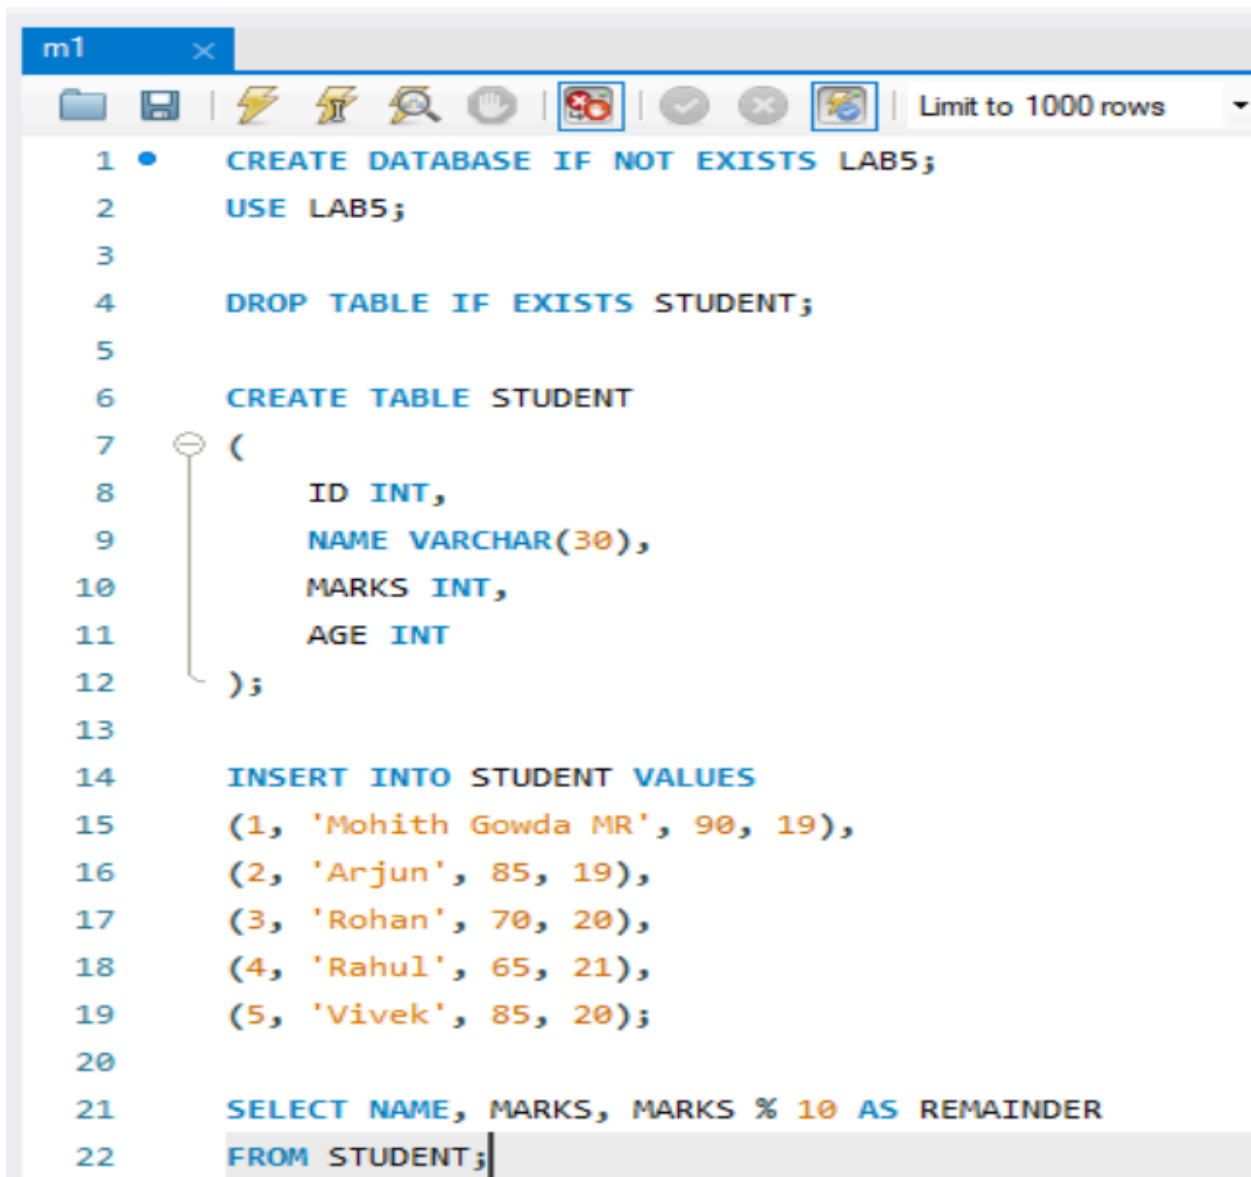


```
1 • CREATE DATABASE IF NOT EXISTS LAB5;
2   USE LAB5;
3
4   DROP TABLE IF EXISTS STUDENT;
5
6   CREATE TABLE STUDENT
7   (
8       ID INT,
9       NAME VARCHAR(30),
10      MARKS INT,
11      AGE INT
12  );
13
14  INSERT INTO STUDENT VALUES
15  (1, 'Mohith Gowda MR', 90, 19),
16  (2, 'Arjun', 85, 19),
17  (3, 'Rohan', 70, 20),
18  (4, 'Rahul', 65, 21),
19  (5, 'Vivek', 85, 20);
20
21  SELECT NAME, MARKS, MARKS % 10 AS REMAINDER
22  FROM STUDENT;
```

OUTPUT

	NAME	MARKS	REMAINDER
►	Mohith Gowda MR	90	0
	Arjun	85	5
	Rohan	70	0
	Rahul	65	5
	Vivek	85	5

COMPARISON OPERATORS:

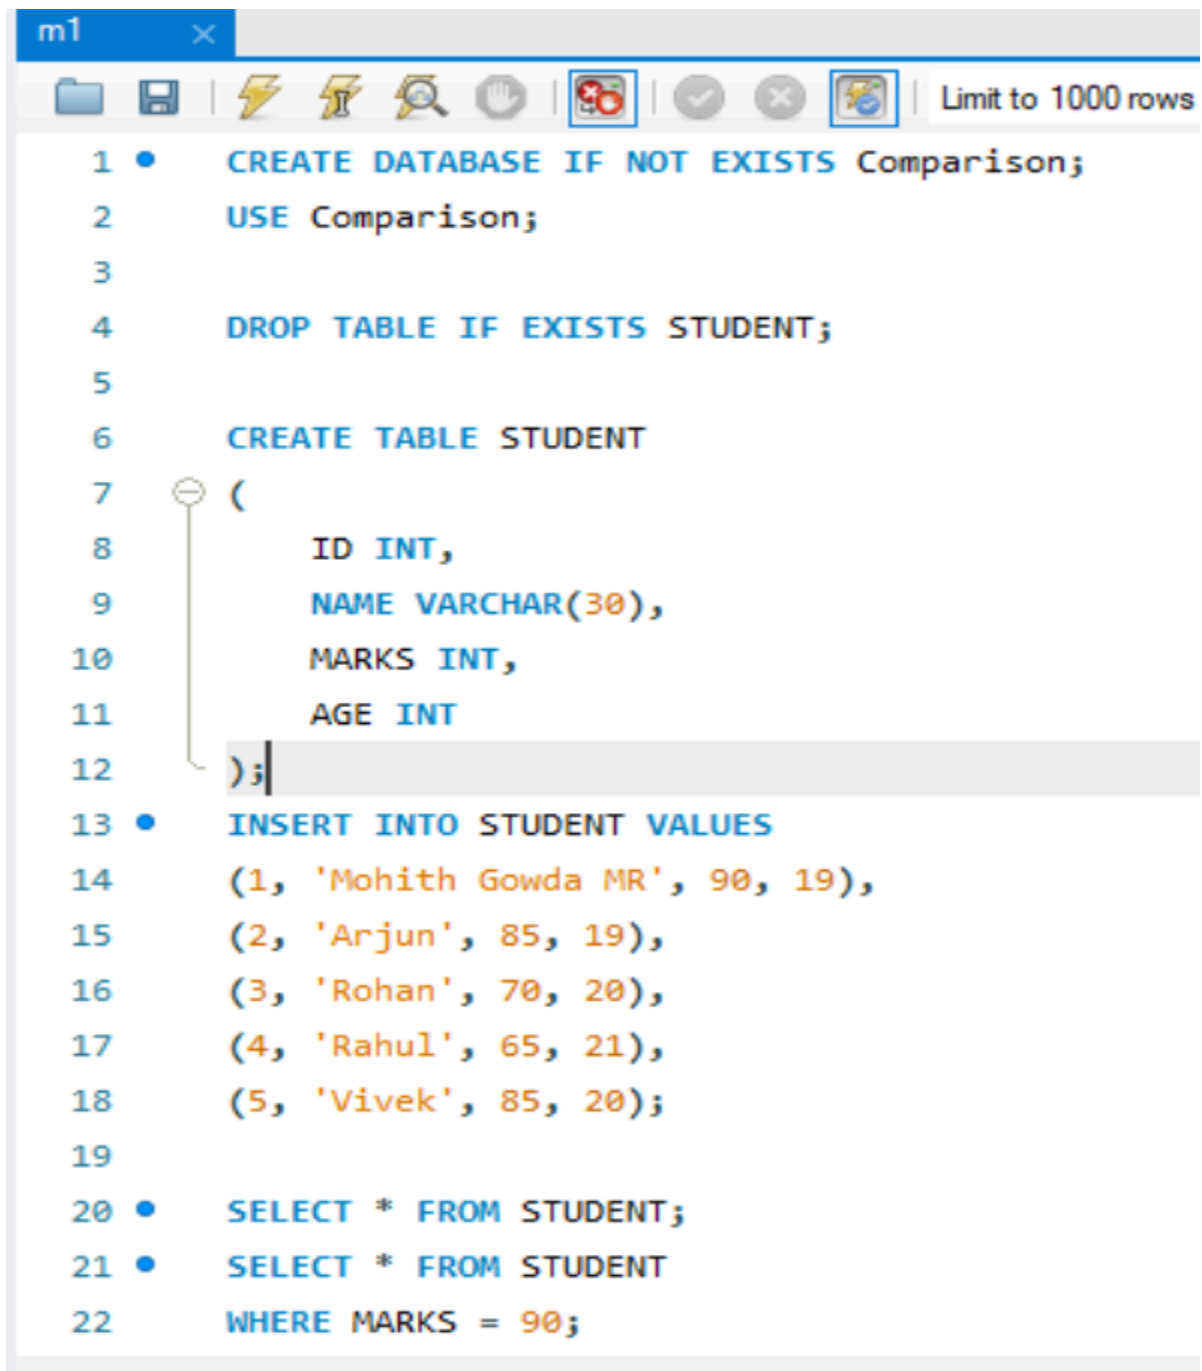

```
m1
1 CREATE DATABASE IF NOT EXISTS Comparison;
2 USE Comparison;
3
4 DROP TABLE IF EXISTS STUDENT;
5
6 CREATE TABLE STUDENT
7 (
8     ID INT,
9     NAME VARCHAR(30),
10    MARKS INT,
11    AGE INT
12 );
13 INSERT INTO STUDENT VALUES
14 (1, 'Mohith Gowda MR', 90, 19),
15 (2, 'Arjun', 85, 19),
16 (3, 'Rohan', 70, 20),
17 (4, 'Rahul', 65, 21),
18 (5, 'Vivek', 85, 20);
19
20 SELECT * FROM STUDENT;
21 SELECT * FROM STUDENT
22 WHERE MARKS = 90;
```

OUTPUT

	ID	NAME	MARKS	AGE
▶	1	Mohith Gowda MR	90	19

```
m1 x
Limit to 1000 rows

1 • CREATE DATABASE IF NOT EXISTS Comparison;
2   USE Comparison;
3
4   DROP TABLE IF EXISTS STUDENT;
5
6   CREATE TABLE STUDENT
7   (
8       ID INT,
9       NAME VARCHAR(30),
10      MARKS INT,
11      AGE INT
12  );
13
14 • INSERT INTO STUDENT VALUES
15   (1, 'Mohith Gowda MR', 90, 19),
16   (2, 'Arjun', 85, 19),
17   (3, 'Rohan', 70, 20),
18   (4, 'Rahul', 65, 21),
19   (5, 'Vivek', 85, 20);
20
21   SELECT * FROM STUDENT
22   WHERE MARKS <> 90;
```

OUTPUT

	ID	NAME	MARKS	AGE
▶	2	Arjun	85	19
	3	Rohan	70	20
	4	Rahul	65	21
	5	Vivek	85	20

```
m1
1 CREATE DATABASE IF NOT EXISTS Comparison;
2 USE Comparison;
3
4 DROP TABLE IF EXISTS STUDENT;
5
6 CREATE TABLE STUDENT
7 (
8     ID INT,
9     NAME VARCHAR(30),
10    MARKS INT,
11    AGE INT
12 );
13
14 INSERT INTO STUDENT VALUES
15 (1, 'Mohith Gowda MR', 90, 19),
16 (2, 'Arjun', 85, 19),
17 (3, 'Rohan', 70, 20),
18 (4, 'Rahul', 65, 21),
19 (5, 'Vivek', 85, 20);
20
21 SELECT * FROM STUDENT
22 WHERE MARKS > 80;
```

OUTPUT

	ID	NAME	MARKS	AGE
▶	1	Mohith Gowda MR	90	19
	2	Arjun	85	19
	5	Vivek	85	20

```
m1 x
Limit to 10

1 • USE Comparison;
2
3 • DROP TABLE IF EXISTS STUDENT;
4
5 • CREATE TABLE STUDENT
6 (
7     ID INT,
8     NAME VARCHAR(30),
9     MARKS INT,
10    AGE INT
11 );
12
13 • INSERT INTO STUDENT VALUES
14 (1, 'Mohith Gowda MR', 90, 19),
15 (2, 'Arjun', 85, 19),
16 (3, 'Rohan', 70, 20),
17 (4, 'Rahul', 65, 21),
18 (5, 'Vivek', 85, 20);
19
20 • SELECT * FROM STUDENT
21 WHERE NOT MARKS = 90;
```

OUTPUT

	ID	NAME	MARKS	AGE
▶	2	Arjun	85	19
	3	Rohan	70	20
	4	Rahul	65	21
	5	Vivek	85	20