Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 105 / 105 testcases passed

mohith_07_25 submitted at Oct 07, 2026 23:45

Analysis | Solution

₹583.25/mo Save over 66%

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats 100.00%

Memory

9.10 MB | Beats 50.49%

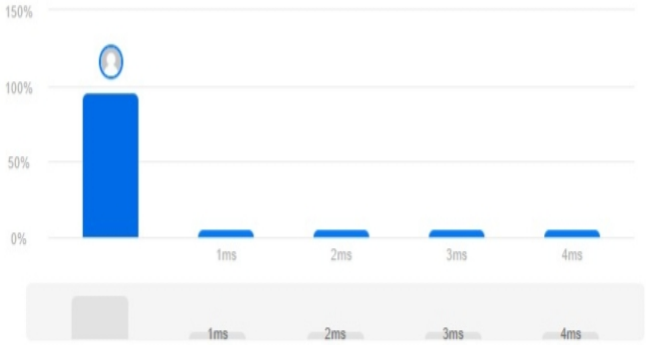

Code | C

```c
int findNumbers(int* nums, int numsSize)
{
    int count = 0; for (int i = 0; i < numsSize; i++)
```

Code

C | Auto

```c
int findNumbers(int* nums, int numsSize)
{
    int count = 0; for (int i = 0; i < numsSize; i++)
    {
        int n = nums[i], digits = 0;
        while (n > 0)
        {           // peel off one digit per division
        n = n / 10;
        digits++;
        }
        if (digits % 2 == 0)
        count++;
    }
    return count;
}
```

Saved Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

nums =

[12,345,2,6,7896]

Output

2

Activate Windows
Go to Settings to activate Windows.

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 53 / 53 testcases passed

mohith_07_25 submitted at Oct 07, 2026 23:51

Analysis | Solution

₹583.25/mo Save over 66%

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

12 ms | Beats 72.40%

Memory

12.54 MB | Beats 3.43%

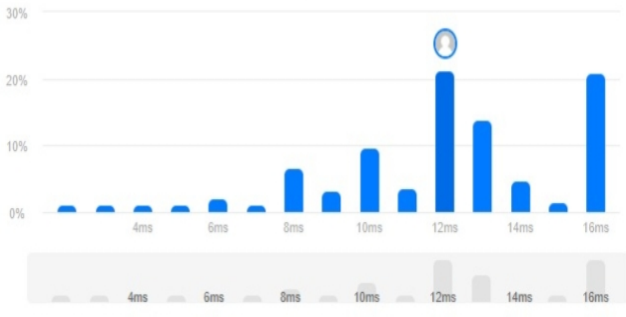

Code | C

```c
int* shuffle(int* nums, int numsSize, int n, int* returnSize)
{
    int* x = malloc(n * sizeof(int));          // first half
```

Code

C | Auto

```c
int* shuffle(int* nums, int numsSize, int n, int* returnSize)
{
    int* x = malloc(n * sizeof(int));          // first half
    int* y = malloc(n * sizeof(int));          // second half
    int* res = malloc(numsSize * sizeof(int));

    for (int i = 0; i < n; i++)  x[i] = nums[i];
    for (int i = 0; i < n; i++)  y[i] = nums[i + n];

    int k = 0;
    for (int i = 0; i < n; i++)
    {
        res[k++] = x[i];
        res[k++] = y[i];
    }
    free(x);
    free(y);
    *returnSize = numsSize;
    return res;
}
```

Saved Ln 11, Col 5

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

nums =

[2,5,1,3,4,7]

Activate Windows
Go to Settings to activate Windows.

Description | Accepted | Editorial | Solutions | Submissions

Upgrade to premium to use debugger

All Submissions

Accepted 56 / 56 testcases passed

mohith_07_25 submitted at Oct 08, 2026 00:15

Analysis | Solution

₹583.25/mo Save over 66%

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats 100.00%

Memory

9.05 MB | Beats 32.10%

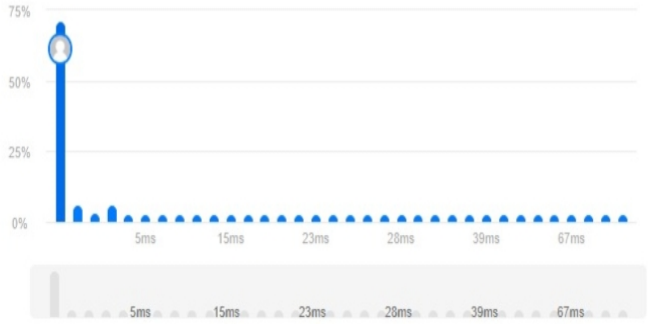

Code | C

```c
bool isAnagram(char* s, char* t)
{
    if (strlen(s) != strlen(t))
```

Code

C | Auto

```c
bool isAnagram(char* s, char* t)
{
    if (strlen(s) != strlen(t))
    return false;
    int count[26] = {0};
    for (int i = 0; s[i] != '\0'; i++)
    {
        count[s[i] - 'a']++;
        count[t[i] - 'a']--;
    }
    for (int c = 0; c < 26; c++)
    {
        if (count[c] != 0)
        return false;
    }
    return true;
}
```

Saved

Ln 15, Col 6

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

s =

"anagram"

t =

"nagaram"

Activate Windows
Go to Settings to activate Windows.

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 116 / 116 testcases passed

mohith_07_25 submitted at Oct 07, 2026 23:55

Analysis | Solution

₹583.25/mo Save over 66%

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats 100.00%

Memory

10.36 MB | Beats 68.40%

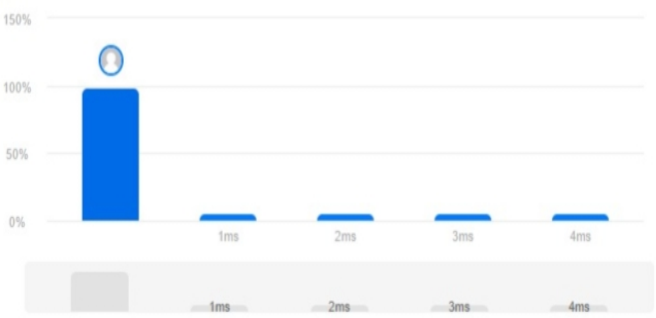

Code | C

```c
int removeElement(int* nums, int numsSize, int val)
{
    int k = 0;
```

Code

C | Auto

```c
int removeElement(int* nums, int numsSize, int val)
{
    int k = 0;
    for (int i = 0; i < numsSize; i++)
    {
    if (nums[i] != val)
    {
        nums[k] = nums[i];
        k++;
    }
    }
    return k;
}
```

Saved

Ln 13, Co

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

nums =

[3,2,2,3]

val =

3

Output

[2,2]

Activate Windows
Go to Settings to activate Windows.

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 362 / 362 testcases passed

mohith_07_25 submitted at Oct 08, 2026 00:25

Analysis | Solution

₹583.25/mo
Save over 66%
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats 100.00%

Memory

12.90 MB | Beats 38.55%



Code | C

```c
int removeDuplicates(int* nums, int numsSize)
{
    if (numsSize == 0)
```

Code

C | Auto

```c
int removeDuplicates(int* nums, int numsSize)
{
    if (numsSize == 0)
    return 0;
    int k = 1;
    for (int i = 1; i < numsSize; i++)
    {
        if (nums[i] != nums[k - 1])
        {
            nums[k] = nums[i];
            k++;
        }
    }
    return k;

}
```

Saved Ln 5, Col 40

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

nums =

[1,1,2]

Output

[1,2]

Activate Windows
Go to Settings to activate Windows.