



Zomato



Data set – Indian_restaurant

Prepared by - Mohitt



1

Executive Summary


This zomato dataset provides a comprehensive overview of over 2.1 lakh (211,944) restaurants across multiple cities in India. It contains 26 features capturing detailed information about restaurant identity, location, pricing, services, and customer feedback.



**2**

Data Source

source	Details
Primary data set	Zomato – Indian Resturant
Analysis Tool	Jupyter Notebook with Pandas and NumPy
Visualization	Plotly Express ,Matplotlib and seaborn

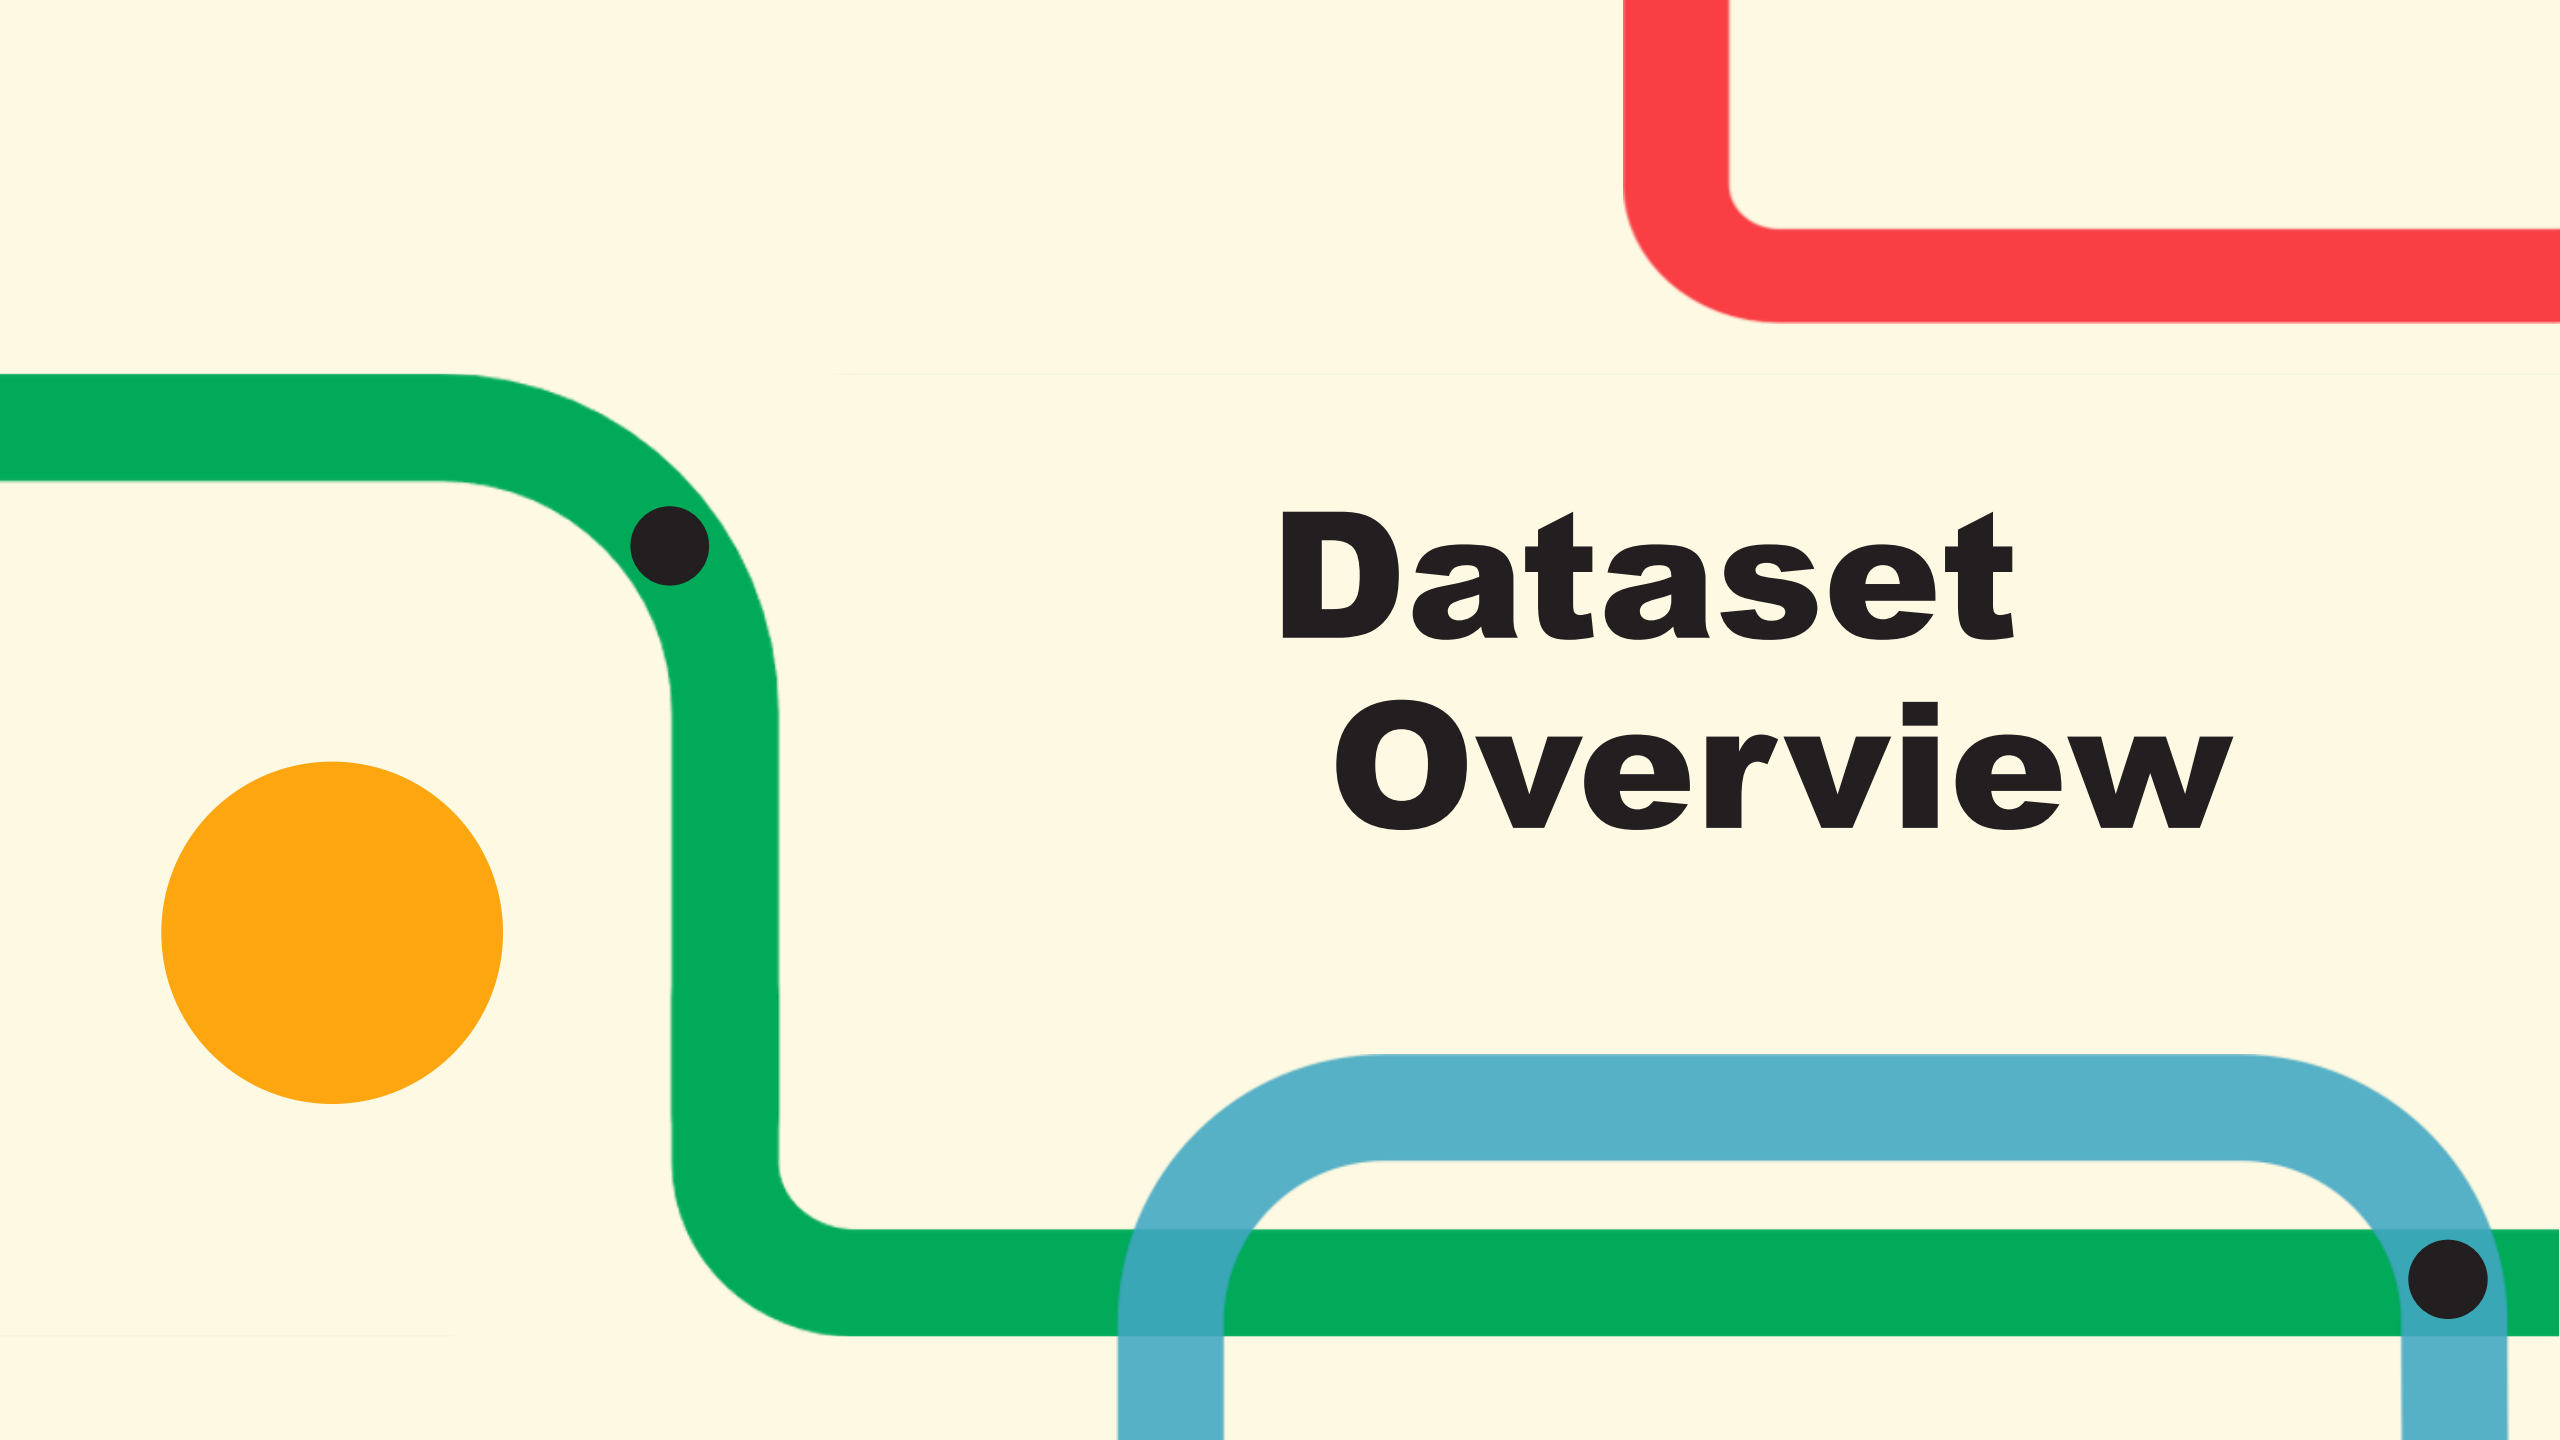The background features a light cream color with several abstract geometric elements. A thick green line enters from the left, curves downwards, and then continues horizontally across the bottom. A thick blue line enters from the bottom, curves upwards, and then continues horizontally across the bottom, overlapping the green line. A thick red line enters from the top right and curves downwards. A solid orange circle is positioned on the left side. Two small black dots are located on the green line: one near the top curve and one near the bottom right end.

Dataset Overview

**3**

Importing the dataset

Data loaded using **pd.read_csv**

Preview column using **df.head**

key columns

- **name**
- **city**
- **price_range**
- **Average_cost_for_two**
- **Aggregate_rating**

```
df=pd.read_csv('Downloads/Indian-Resturants.csv')
df.head(2)
```

name	establishment	url	address	city	city_id	locality	latitude	longitude	...	price_range	currency	highlights	agggreg
Bikanervala	['Quick Bites']	https://www.zomato.com/agra/bikanervala-khanda...	Kalyani Point, Near Tulsi Cinema, Bypass Road,...	Agra	34	Khandari	27.211450	78.002381	...	2	Rs.	['Lunch', 'Takeaway Available', 'Credit Card',...]	
Mama Chicken Mama Franky House	['Quick Bites']	https://www.zomato.com/agra/mama-chicken-mama-...	Main Market, Sadar Bazaar, Agra Cantt, Agra	Agra	34	Agra Cantt	27.160569	78.011583	...	2	Rs.	['Delivery', 'No Alcohol Available', 'Dinner',...]	



3

Info of the data set

- **Total entries: 211944**
- **Columns: 26**
- **Data types:**
 - **13 columns are type of object**
 - **9 columns are int type**
 - **and 4 columns is float type**
- **(address, zipode, timings)**
- **has missing values**

```
df.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 211944 entries, 0 to 211943
Data columns (total 26 columns):
#   Column                Non-Null Count  Dtype
---  -
0   res_id                211944 non-null  int64
1   name                  211944 non-null  object
2   establishment         211944 non-null  object
3   url                   211944 non-null  object
4   address               211810 non-null  object
5   city                  211944 non-null  object
6   city_id               211944 non-null  int64
7   locality              211944 non-null  object
8   latitude              211944 non-null  float64
9   longitude             211944 non-null  float64
10  zipcode                48757 non-null   object
11  country_id            211944 non-null  int64
12  locality_verbose      211944 non-null  object
13  cuisines              210553 non-null  object
14  timings               208070 non-null  object
15  average_cost_for_two  211944 non-null  int64
16  price_range           211944 non-null  int64
17  currency              211944 non-null  object
18  highlights            211944 non-null  object
19  aggregate_rating      211944 non-null  float64
20  rating_text           211944 non-null  object
21  votes                 211944 non-null  int64
22  photo_count           211944 non-null  int64
23  opentable_support     211896 non-null  float64
24  delivery               211944 non-null  int64
25  takeaway              211944 non-null  int64
dtypes: float64(4), int64(9), object(13)
memory usage: 42.0+ MB
```



Statistical Analysis

Used **df.describe** for understanding descriptive statistic of the dataset

- **Key columns for further analysis**
- **average_cost_for_two**
- **price_range**
- **Aggregate_rating**

```
[4]: df.describe()
```

	res_id	city_id	latitude	longitude	country_id	average_cost_for_two	price_range	aggregate_rating	votes	photo_count
count	2.119440e+05	211944.000000	211944.000000	211944.000000	211944.0	211944.000000	211944.000000	211944.000000	211944.000000	211944.000000
mean	1.349411e+07	4746.785434	21.499758	77.615276	1.0	595.812229	1.882535	3.395937	378.001864	256.971224
std	7.883722e+06	5568.766386	22.781331	7.500104	0.0	606.239363	0.892989	1.283642	925.333370	867.668940
min	5.000000e+01	1.000000	0.000000	0.000000	1.0	0.000000	1.000000	0.000000	-18.000000	0.000000
25%	3.301027e+06	11.000000	15.496071	74.877961	1.0	250.000000	1.000000	3.300000	16.000000	3.000000
50%	1.869573e+07	34.000000	22.514494	77.425971	1.0	400.000000	2.000000	3.800000	100.000000	18.000000
75%	1.881297e+07	11306.000000	26.841667	80.219323	1.0	700.000000	2.000000	4.100000	362.000000	128.000000
max	1.915979e+07	11354.000000	10000.000000	91.832769	1.0	30000.000000	4.000000	4.900000	42539.000000	17702.000000



Statistical Analysis

Key Numerical Insights

Average Cost for Two: ₹595

Most restaurants fall between ₹250 – ₹700

Wide variation indicates both budget and premium options

Price Range:

Mostly between 1 and 2 (affordable to mid-range)

Maximum value of 4 shows presence of luxury dining

Ratings & Popularity

Average Rating: 3.39

Median rating is 3.8, indicating generally good customer satisfaction
Ratings mostly range between 3.3 – 4.1

Votes (Customer Engagement):

Average: 378 votes

Highly skewed with some restaurants getting 42,000+ votes

Photo Count:

Average: 256 photos per restaurant

Some restaurants have extremely high engagement (up to 17,702 photos)



5

Identifying Null values

.isnull() method gives the null values

.sum() method gives the sum of values

Some columns contain missing data that require attention:

Zipcode: 163,187 missing values

Majority of entries missing, may not be useful for analysis

Timings: 3,874 missing values Some restaurants lack operating hours

Cuisines: 1,391 missing values Minor gaps in cuisine

Address: 134 missing values Very small impact

OpenTable Support: 48 missing values

Negligible impact

```
df.isnull().sum()
res_id      0
name        0
establishment 0
url         0
address    134
city       0
city_id    0
locality   0
latitude   0
longitude  0
zipcode   163187
country_id 0
locality_verbose 0
cuisines   1391
timings    3874
average_cost_for_two 0
price_range 0
currency   0
highlights 0
aggregate_rating 0
rating_text 0
votes      0
photo_count 0
opentable_support 48
delivery    0
takeaway    0
dtype: int64
```

Data Cleaning.





1

Handling Missing Values

- **Address Column**

- Missing values were replaced with "Unknown" using **.fillna()**
- Ensures no empty entries in location details

- **Zipcode Column**

- Dropped completely due to excessive missing values by using **.drop()**
- Helps reduce noise and improve dataset reliability

```
df['address']=df['address'].fillna('unknown')  
  
df.drop(columns='zipcode',inplace=True)  
  
df[df['cuisines'].isnull()]  
  
df['cuisines'].fillna(df['cuisines'].mode,inplace=True)  
  
df['timings'].fillna('Not Available',inplace=True)
```



1

Handling Missing Values

- **Cuisines Column**

- Missing values filled using the most frequent (mode) cuisine using **.fillna()** and **.mode()**
- Maintains consistency in cuisine categorization

- **Timings Column**

- Missing values replaced with "Not Available"
- Preserves records without losing rows

- **OpenTable Support Column**

- Missing values filled using the mean value by using **.mean()**
- Suitable for numerical type data to maintain distribution balance



1

Handling Duplicate Records

`df[df.duplicated()]` = This step checks for duplicate rows in the dataset Helps identify repeated entries that may distort analysis

Removing Duplicates

`df.drop_duplicates(inplace=True)`

- Removes all duplicate records from the dataset
- Keeps only the first occurrence of each entry

```
df[df.duplicated()]
```

```
df.drop_duplicates(inplace=True)
```



1

Handling Invalid Values

- **Value Replacement**
- **Replaced -1 values with 0 in:**
- **Delivery column**
- **Takeaway column**
-
- **Reason for This Step**
- **In these columns:**
 - **1 = Available**
 - **0 = Not Available**
 - **-1 = Invalid / Incorrect entry**
- **Replacing -1 with 0 ensures uniform binary representation**

```
df['delivery'].replace(-1,0,inplace=True)  
df['takeaway'].replace(-1,0,inplace=True)
```



2

Basic Statistics:

Calculate and visualize the average rating of restaurants.

Average Restaurant Rating Analysis

- **Grouped data by restaurant name using `.groupby()`**
- **Calculated the mean (average) rating for each using `.mean()`**
- **restaurant**
- **Selected top 20 records by using `.head()`**
- **Renamed columns for better readability**

```
avg_rating=df.groupby('name')['aggregate_rating'].mean().reset_index().head(20)
avg_rating.columns=['resturants','avg_ratings']
```

**2**

Basic Statistics:

Insights: Average Ratings of Restaurants

- The dataset shows a wide variation in average ratings, ranging from 0.0 to 4.3.
- Top-performing restaurants include:
- 007 Punjabi Dhaba (4.3)
- #BC and #Dilliwaala6 (4.2)
- #BEIR (4.1)
- These indicate high customer satisfaction and strong service quality

Several restaurants have good ratings around

3.8 – 4.0, such as:

- #1, Culinary Avenue - The Red Maple*
- #788 Avenue*
- Peg Bar - Radisson Blu Hotel*

```
avg_rating=df.groupby('name')['aggregate_rating'].mean().reset_index().head(20)
avg_rating.columns=['restaurants','avg_ratings']
avg_rating
```

	restaurants	avg_ratings
0	# Wednesday	3.50
1	#1, Culinary Avenue - The Red Maple	3.90
2	#788 Avenue	3.90
3	#BC	4.20
4	#BEIR	4.10
5	#Dilliwaala6	4.20
6	#Jaipur Darbar	3.40
7	#OFF Campus	4.00
8	#Selfieccino	3.30
9	#Underground Restro & Bar	3.20
10	#Waffles	3.95
11	#World of Waffles	0.00
12	#gachKhana	2.60
13	#nofilter	3.90
14	(SFC)Singh Fresh Chicken	4.00
15	-301°F!	2.70
16	.Peg Bar - Radisson Blu Hotel	3.90
17	007 Punjabi Dhaba	4.30
18	007 Restro Bar - Hotel Seetal	3.30
19	009 Restaurant	3.50



2

Basic Statistics:

plot the map using plotly

X-Axis → 'restaurant'

Y → 'agg_rating'

Color → 'restaurant'





Basic Statistics:

Analyze the distribution of restaurant ratings to understand the overall rating landscape.'

Restaurant Rating Distribution

- **Total Records:** 60,417
- **Average Rating:** 3.03
- **Median Rating:** 3.5

Distribution Insights

- **Minimum Rating:** 0.0
Indicates poor performance
 - **Maximum Rating:** 4.9
Shows presence of highly rated restaurants
 - **25th Percentile (Q1):** 2.9
 - **75th Percentile (Q3):** 4.0
- Most ratings fall between 2.9 and 4.0**

```
df['aggregate_rating'].describe()
```

```
count    60417.000000
mean      3.032868
std       1.440751
min       0.000000
25%       2.900000
50%       3.500000
75%       4.000000
max       4.900000
Name: aggregate_rating, dtype: float64
```



Location Analysis: :

Identify the city with the highest concentration of restaurants.
City-wise Distribution of Restaurants

.value_counts() counts how many time a value accour in data set

.reset_index() convert series into a data frame

- **Top Cities by Number of Restaurants**

- **Chennai** – 2,612 restaurants
 - **Mumbai** – 2,538 restaurants
 - **Bangalore** – 2,365 restaurants
 - **Pune** – 1,911 restaurants
 - **New Delhi** – 1,847 restaurants
- These cities have the highest concentration of restaurants, indicating strong food culture and demand.**

Key Observations

- **There is a gradual decline in the number of restaurants as we move to smaller cities**
- **Cities like:**
 - **Udupi (61)**
 - **Howrah (50)**
 - **Neemrana (26)**
 - **Greater Noida (22)**
 - **Nayagaon (15)****have very low representation**

```
df['city'].value_counts().reset_index()
```

	city	count
0	Chennai	2612
1	Mumbai	2538
2	Bangalore	2365
3	Pune	1911
4	New Delhi	1847
...	...	...
94	Udupi	61
95	Howrah	50
96	Neemrana	26
97	Greater Noida	22
98	Nayagaon	15



3

Location Analysis: :

Visualize the distribution of restaurant ratings across different cities.

- **Grouped data by city by using `.groupby()`**
- **Calculated the average (mean) rating for each city using `.mean()`**
- **Sorted the results in descending order (highest ratings first) by `sort_values()`**
- **Selected the top 20 cities by using `.head()`**
- **Cities at the top have better overall dining experiences**
- **Useful for understanding regional performance trends**

```
high=df.groupby('city')['aggregate_rating'].mean().sort_values(ascending=False).reset_index().head(20)
high.columns=['city','ratings']
```



Location Analysis: :

Visualize the distribution of restaurant ratings across different cities.

City-wise Distribution of Restaurants Ratings

Top Performing Cities

- **Gurgaon – 3.87 (Highest)**
- **Secunderabad – 3.85**
- **Mumbai – 3.79**
- **Hyderabad – 3.77**
- **New Delhi – 3.77**

Key Observations

- **All top cities have ratings between 3.5 and 3.9, indicating consistently good performance**
- **Gurgaon and Secunderabad lead in customer satisfaction**
- **Metro cities dominate, showing better service quality and competition**
- **Differences in ratings are small, meaning competition is very close**

high		
	city	ratings
0	Gurgaon	3.872549
1	Secunderabad	3.848454
2	Mumbai	3.795863
3	Hyderabad	3.775751
4	New Delhi	3.770005
5	Kolkata	3.767233
6	Bangalore	3.729641
7	Chennai	3.667764
8	Noida	3.651648
9	Navi Mumbai	3.546094
10	Pune	3.534223



3

Location Analysis: :

Visualize the distribution of restaurant ratings across different cities.


Visualization:

plot the map using plotly

X-Axis → 'rating'

Y → 'city'

Color → 'city'

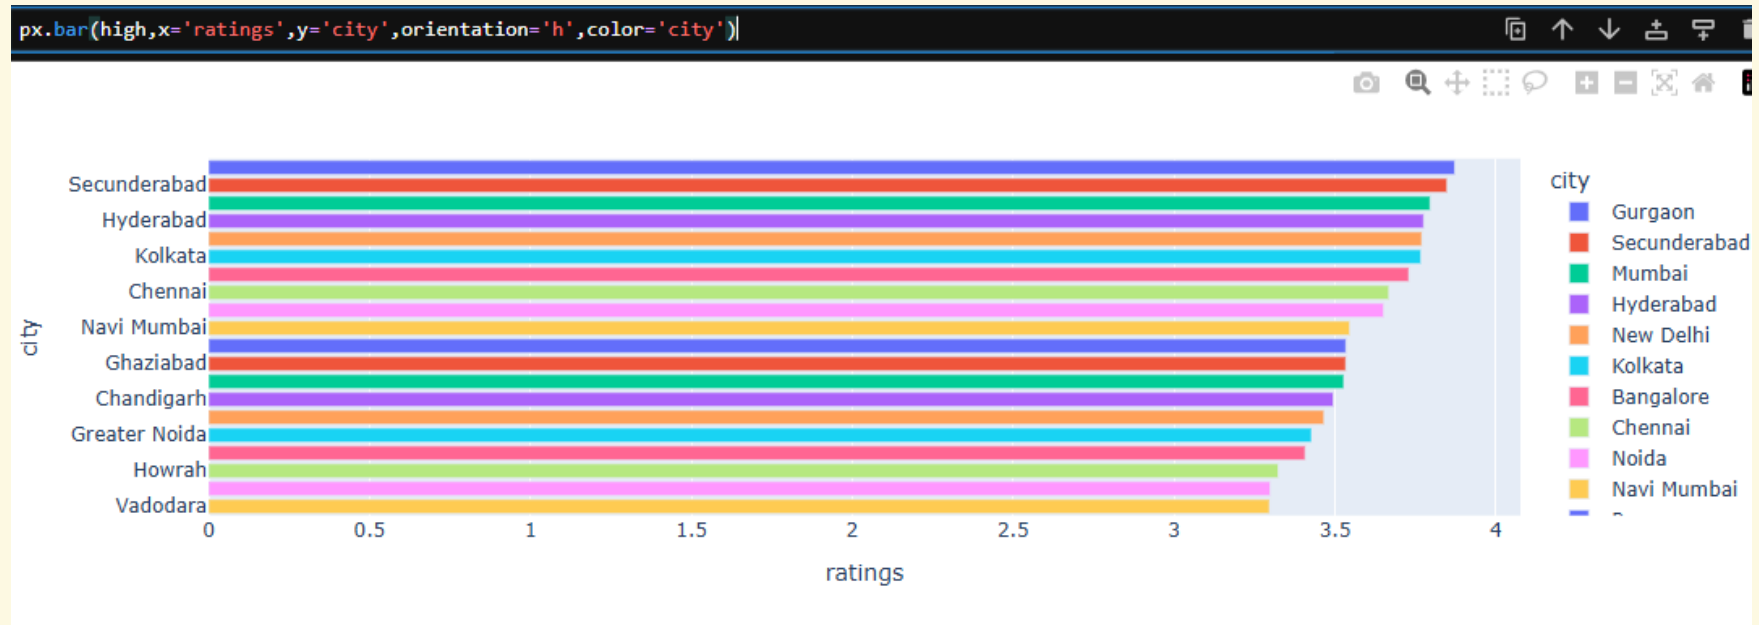



4

Cuisine Analysis:

- **Determine the most popular cuisines among the listed restaurants.**

- **str.split(',')**

- Splits multiple cuisines in a single cell into a list
- Example: "North Indian, Chinese" → ["North Indian", "Chinese"]
-

- **explode()**

- Converts each cuisine into a separate row
- Helps in analyzing each cuisine individually

- **str.strip()**

- Removes extra spaces from cuisine names
- Ensures clean and consistent values

```
cuisins=df['cuisines'].str.split(',').explode().str.strip()
```

**4**

Cuisine Analysis:

Top Cuisines

North Indian – 21,259

Chinese – 14,139

Fast Food – 13,191

Desserts – 7,755

Beverages – 7,486

Key Observations

- **North Indian cuisine is the most popular by a large margin**
- **Chinese and Fast Food are also highly preferred, indicating demand for quick and affordable meals**
- **Desserts and Beverages highlight the importance of snacks and add-ons in dining**

```
cuisins.value_counts().sort_values(ascending=False).reset_index()
```

	cuisines	count
0	North Indian	21259
1	Chinese	14139
2	Fast Food	13191
3	Desserts	7755
4	Beverages	7486
...	...	...
128	Garhwali	2
129	International	1
130	Swedish	1
131	Vegan	1
132	Mandi	1



5

Price Range and Rating:

Analyze the relationship between price range and restaurant ratings.

Group price_range and aggregate_rating

Using **.groupby()**

Calculate average using **.mean()**

Converted into data frame using **reset_index()**

Key Results

- Price Range 1 (Low Budget): 3.03
- Price Range 2 (Affordable): 3.49
- Price Range 3 (Mid-Range): 3.86
- Price Range 4 (Premium): 3.93

Key Observations

- Ratings increase as price range increases
- Low-budget restaurants have the lowest average ratings
- Premium restaurants receive the highest ratings

```
df.groupby('price_range')['aggregate_rating'].mean().reset_index()
```

	price_range	aggregate_rating
0	1	3.033294
1	2	3.495887
2	3	3.858305
3	4	3.937579



5

Price Range and Rating:

Visualize the average cost for two people in different price categories.

Key Results

Category 1 (Low Budget): ₹219

Category 2 (Affordable): ₹525

Category 3 (Mid-Range): ₹1,105

Category 4 (Premium): ₹2,283

Key Observations

There is a clear increase in cost as the price category rises

Each category shows a significant jump in pricing

The difference between Category 3 and 4 is very large, indicating premium dining is much more expensive

```
cat=df.groupby('price_range')['average_cost_for_two'].mean().reset_index()  
cat.columns=['category','average_cost_for_two']  
cat
```

	category	average_cost_for_two
0	1	219.212740
1	2	524.773848
2	3	1104.808313
3	4	2283.108568



5

Price Range and Rating:

Visualization


Plot the map using plotly

X-Axis→ 'category'

Y → 'average_cost_for_two'

Color → 'category'

```
px.bar(cat,x='category',y='average_cost_for_two',color='category')
```

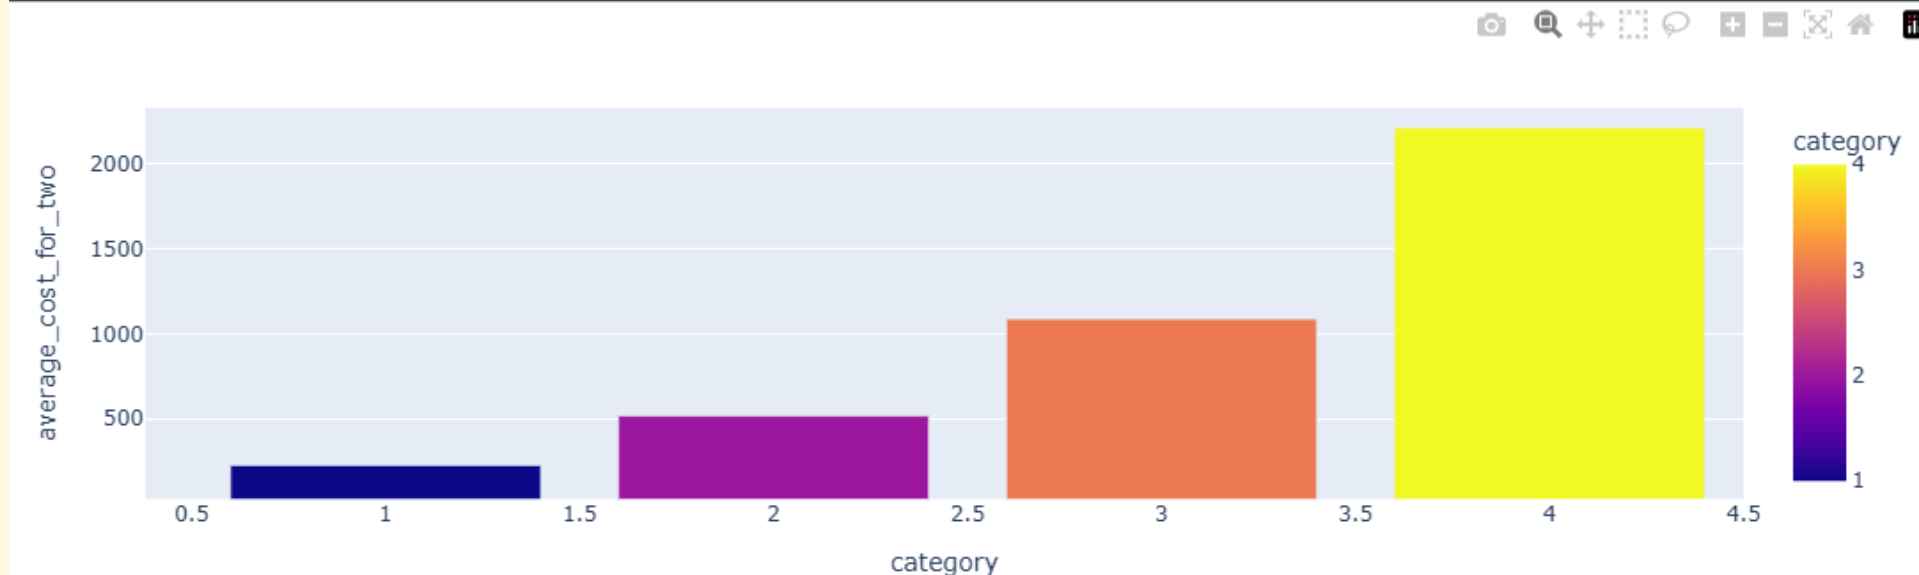

**6**

Top Restaurant Chains:

Identify and visualize the top restaurant chains based on the number of outlets.

- **Grouped data by restaurant name**
- **Counted the number of occurrences (outlets) for each restaurant**
- **Sorted in descending order to get highest outlet counts**
- **Selected top 10 restaurant chains**
- **Renamed columns for better readability**

```
outlet=df.groupby('name').size().reset_index(name='outlet_count').sort_values(by='outlet_count',ascending=False).head(10)
outlet.columns=['outlet','count']
outlet
```

**6**

Top Restaurant Chains:

Identify and visualize the top restaurant chains based on the number of outlets.

Top Restaurant Chains by Number of Outlets

Top 10 Chains

Domino's Pizza – 406 outlets

Cafe Coffee Day – 323 outlets

KFC – 261 outlets

Subway – 211 outlets

Keventers – 208 outlets

Baskin Robbins – 207 outlets

McDonald's – 155 outlets

Pizza Hut – 150 outlets

Burger King – 144 outlets

Barbeque Nation – 119 outlets

	outlet	count
10302	Domino's Pizza	406
6054	Cafe Coffee Day	323
17982	KFC	261
34434	Subway	211
18820	Keventers	208
3885	Baskin Robbins	207
22401	McDonald's	155
27096	Pizza Hut	150
5700	Burger King	144
3787	Barbeque Nation	119



6

Top Restaurant Chains:


Key Observations

Domino's Pizza leads by a large margin, showing strong market dominance

Most top chains belong to the fast food and quick service category

Beverage and dessert brands like **Cafe Coffee Day**, **Keventers**, **Baskin Robbins** also have strong presence

Global brands (**KFC**, **McDonald's**, **Subway**, **Burger King**) are highly expanded

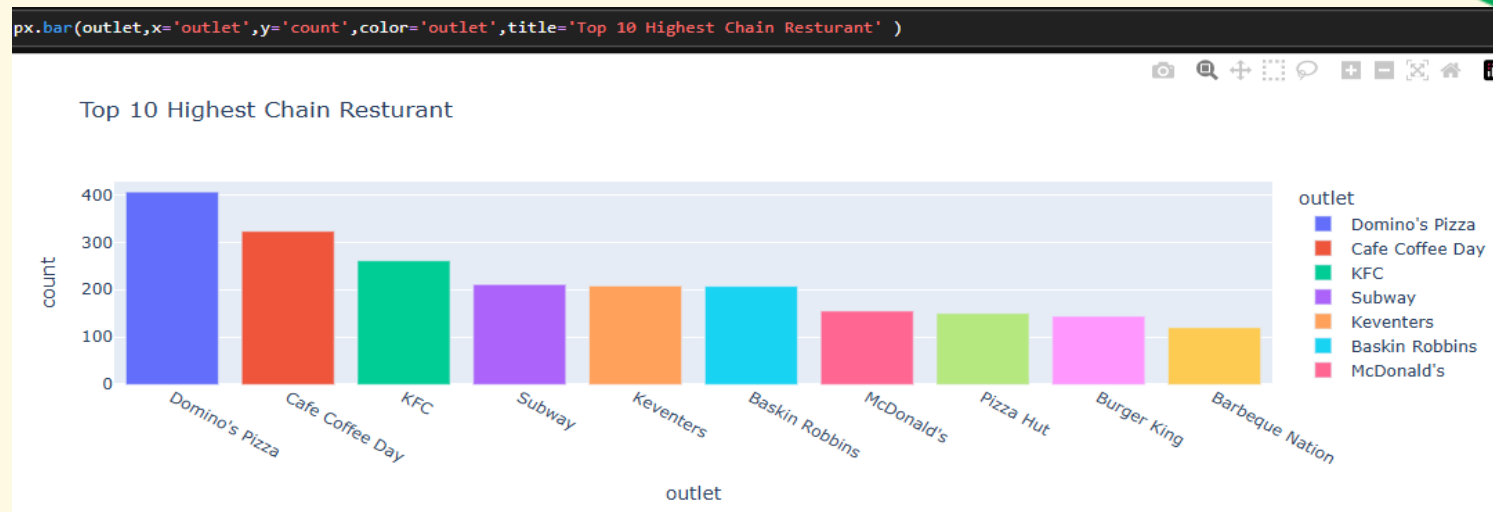



6

Top Restaurant Chains:

Explore the ratings of these top chains.

Identifies top 10 restaurant chains based on number of outlets

- Filters the dataset to include only those top 10 chains by using **.groupby()** and **.head()**
- Creates a new dataset focused on major brands using **.reset_index**
- Calculates the average rating for each top chain
- By using **.mean()**
- Helps compare brand popularity vs customer satisfaction

```
out=df.groupby('name').size().reset_index(name='outlet_count').sort_values(by='outlet_count',ascending=False).head(10)

top_data=df[df['name'].isin(out['name'])]

chains = top_data.groupby('name')['aggregate_rating'].mean()
```

**6**

Top Restaurant Chains:

Explore the ratings of these top chains.

Key Observations

- **Barbeque Nation** stands out with the highest rating, indicating excellent customer experience
- **Fast food giants** like **McDonald's**, **KFC**, **Burger King** maintain good and consistent ratings
- **Domino's**, **Subway**, **Pizza Hut** fall in the moderate rating range (3.5 – 3.7)
- **Cafe Coffee Day** and **Baskin Robbins** have relatively lower ratings

chains	
name	
Barbeque Nation	4.397500
Baskin Robbins	3.054106
Burger King	3.902083
Cafe Coffee Day	2.935294
Domino's Pizza	3.669212
KFC	3.831418
Keventers	3.704808
McDonald's	3.849032
Pizza Hut	3.535333
Subway	3.600474
Name: aggregate_rating dtype: float64	

**7**

Restaurant Features:

Analyze the distribution of restaurants based on features like Wi-Fi, Alcohol availability, etc.

- **str.split(',')**
 - Splits multiple features into a list
 - Example: "WiFi, Outdoor Seating" → ["WiFi", "Outdoor Seating"]
- **explode()**
 - Converts each feature into a separate row
 - Allows detailed feature-level analysis
- **str.strip()**
 - Removes extra spaces for clean data
- **value_counts()**
 - Counts how often each feature appears
- **reset_index()**
 - Converts the result into a structured table

```
resto=df['highlights'].str.split(',').explode().str.strip()  
  
resto.value_counts().reset_index()
```

**7**

Restaurant Features:

Top Features

Cash Payment – 43,849

Takeaway Available – 43,550

Indoor Seating – 33,549

Lunch Availability – 30,236

Dinner Availability – 28,110

Key Observations

Cash payment is the most common method, indicating wide acceptance

Takeaway service is highly popular, reflecting demand for convenience

Indoor seating is a standard feature in most restaurants

Lunch and Dinner services dominate, showing focus on main meal times

	highlights	count
0	'Cash'	43849
1	'Takeaway Available'	43550
2	'Indoor Seating'	33549
3	'Lunch'	30236
4	'Dinner'	28110
...	...	...
239	['Fullbar']	1
240	['Table booking recommended']	1
241	['All Day Breakfast']	1
242	['Table Reservation Not Required']	1
243	['Breakfast']	1



7

Restaurant Features:

Investigate if the presence of certain features correlates with higher ratings.

- Removes rows where highlights are missing
Using **dropna()**
- Ensures only valid feature data is used
- Splits multiple features into a list by **str.split**
- Converts each feature into a separate row
- Using **reset_index()**

Cleans feature names by removing extra spaces

- Groups data by feature
- Calculates average rating for each feature
- Sorts results to find highest-rated features
by using **.sort_values()**

```
df_exp = df.dropna(subset=['highlights']).copy()

df_exp = df_exp.assign(feature=df_exp['highlights'].str.split(','))
df_exp = df_exp.explode('feature')

df_exp['feature'] = df_exp['feature'].str.strip()

df_exp.groupby('feature')['aggregate_rating'].mean().sort_values(ascending=False)
```



7

Restaurant Features:

Top High-Rated Features

Serves Alcohol – 4.60

Subscription Required – 4.50

Speakeasy – 4.32

Craft Beer – 4.26

Gastro Pub – 4.24

Key Observations

- Restaurants offering alcohol and premium experiences tend to receive higher ratings
- Features like craft beer and gastro pubs indicate specialized dining experiences
- These services attract customers looking for quality ambience and unique experiences

```
feature
'Serves Alcohol'      4.600000
'Subscription Required' 4.500000
'Speakeasy'           4.325000
'Craft Beer'           4.261728
'Gastro Pub'           4.240476
...
['Table Reservation Not Required'] 0.000000
['All Day Breakfast']               0.000000
['Table booking recommended']       0.000000
['All Day Breakfast']               0.000000
['Air Conditioned']                 0.000000
```



Conclusion:

Key Findings & Insights



Customer Ratings

Average rating is around 3.0–3.5, indicating moderate satisfaction

Majority of restaurants fall between 3.0 to 4.0 ratings
Very few restaurants achieve premium ratings (above 4.5)

Pricing vs Ratings

- **Higher price ranges tend to have better ratings**
- **Premium restaurants (price range 3–4) deliver better overall experience**
- **Budget restaurants dominate in number but have slightly lower ratings**

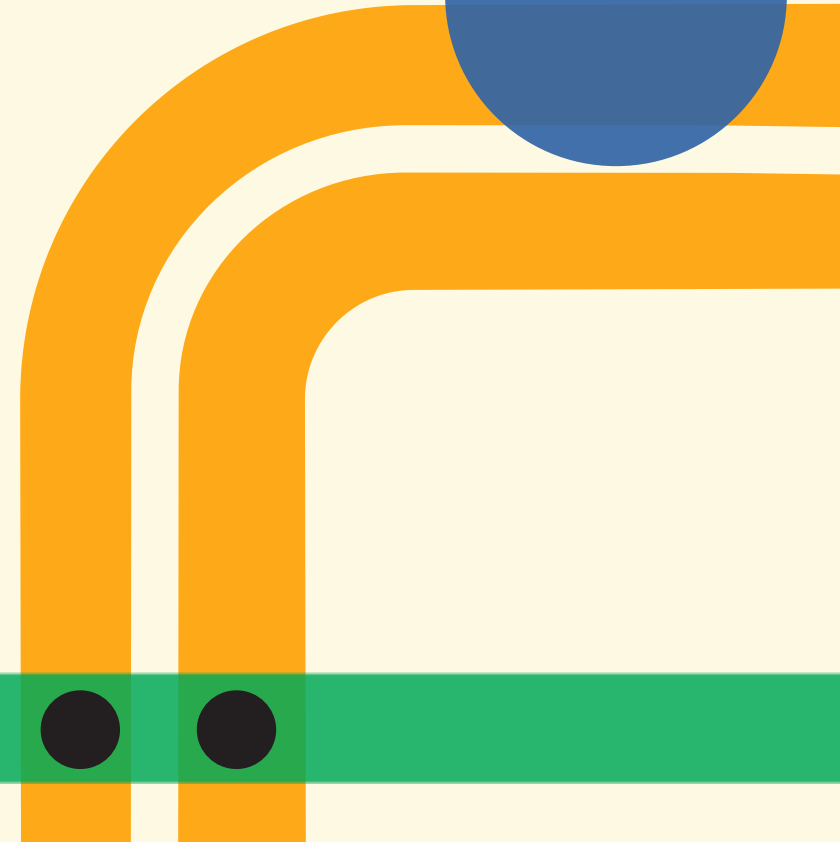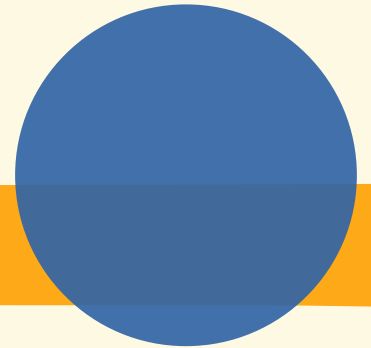



8

Conclusion:

City-wise Performance

Cities like Gurgaon, Secunderabad, and Mumbai show higher average ratings

Metro cities dominate in both restaurant count and quality



Smaller cities have limited but growing presence

Popular Cuisines

North Indian, Chinese, and Fast Food are the most popular

High demand for affordable and familiar food options

Niche cuisines exist but have low frequency

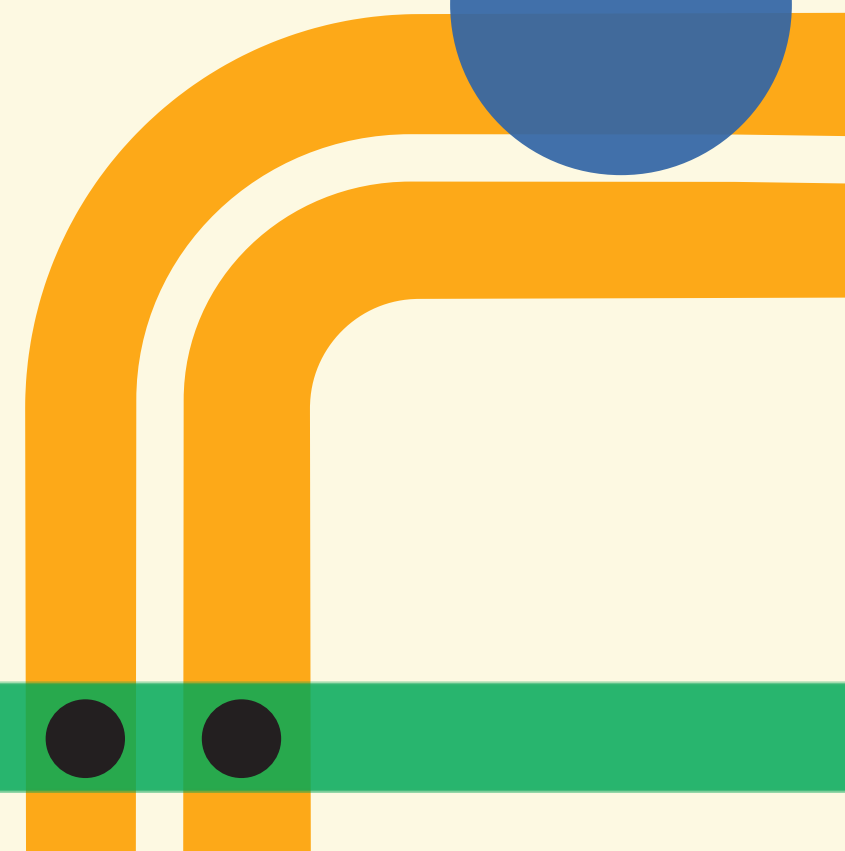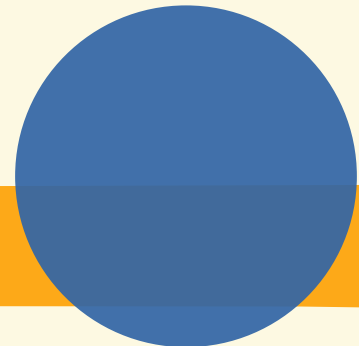



8

Conclusion:

Restaurant Chains

Top chains :

- **Domino's Pizza**
- **Cafe Coffee Day**
- **KFC**
- **Subway**

Large chains dominate due to brand trust and wide presence

However, higher outlets ≠ higher ratings

Features Impact

High-rated features:



Serves Alcohol

Craft Beer / Gastro Pub

Speakeasy

Basic features (AC, takeaway, etc.) have low impact on ratings

Customers value experience over basic facilities

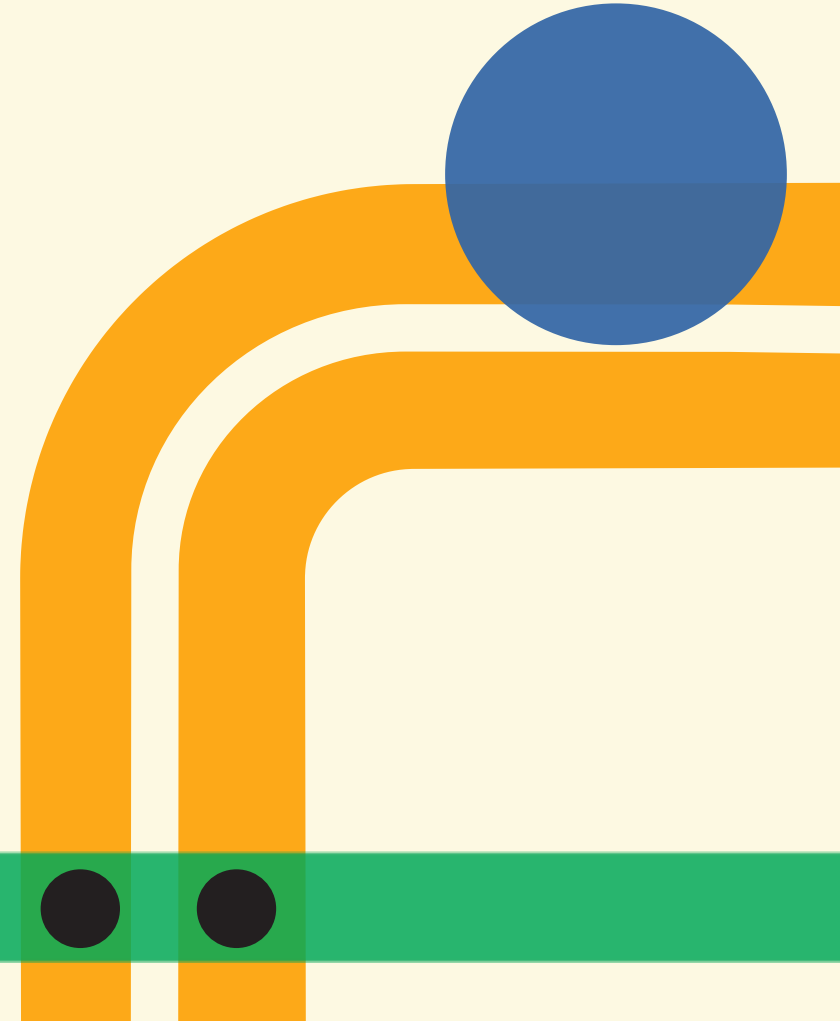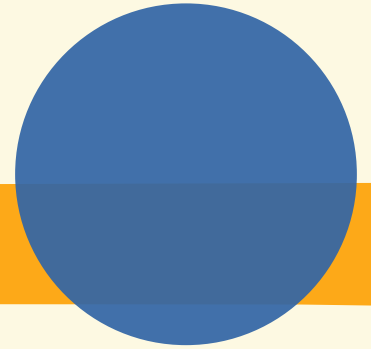



8



Conclusion:

Service Trends

Takeaway and indoor seating are widely available
Restaurants focus on convenience and accessibility
Premium services are less common but more impactful

Key Success Factors

Quality of experience (ambience, uniqueness)
Premium offerings (alcohol, specialty dining)
Strategic pricing
Strong brand presence
Location (metro cities perform better)

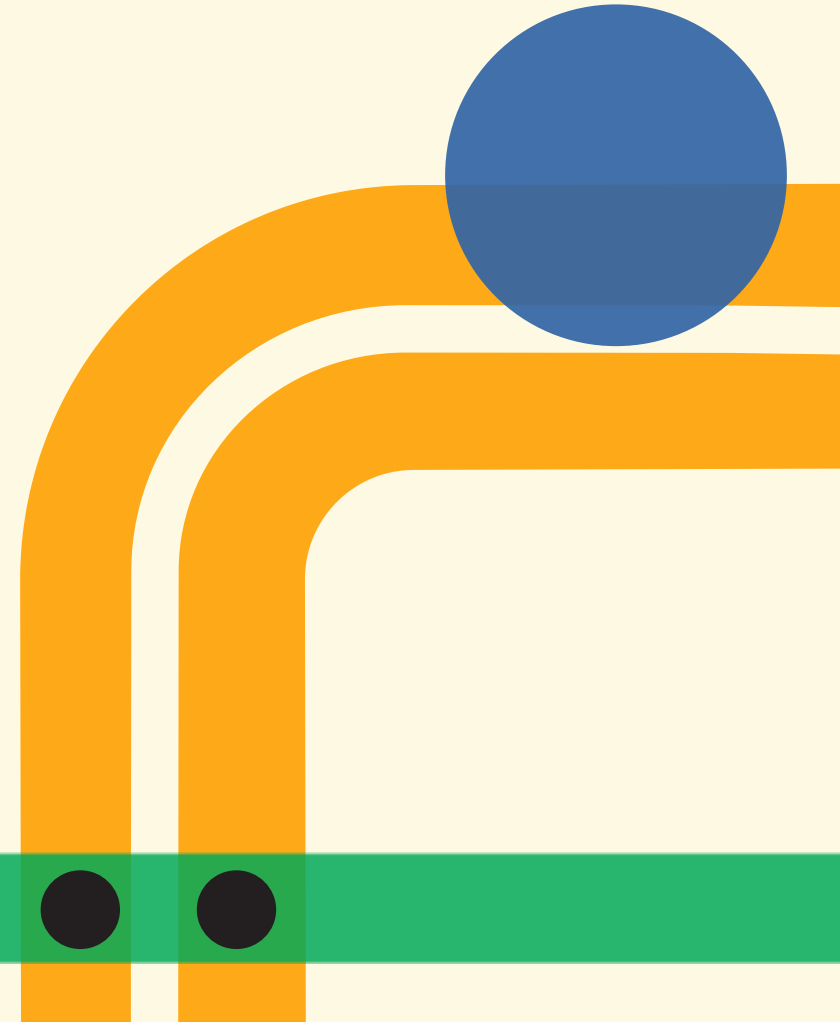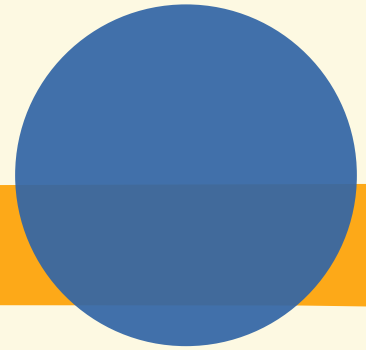



Recommendations:

For Restaurant Owners



Focus on enhancing customer experience, not just basic services

Introduce premium features (ambience, specialty menus, beverages)

Maintain consistent quality to improve ratings

Use pricing strategically—higher pricing should match better service

Expand in high-performing cities for better visibility

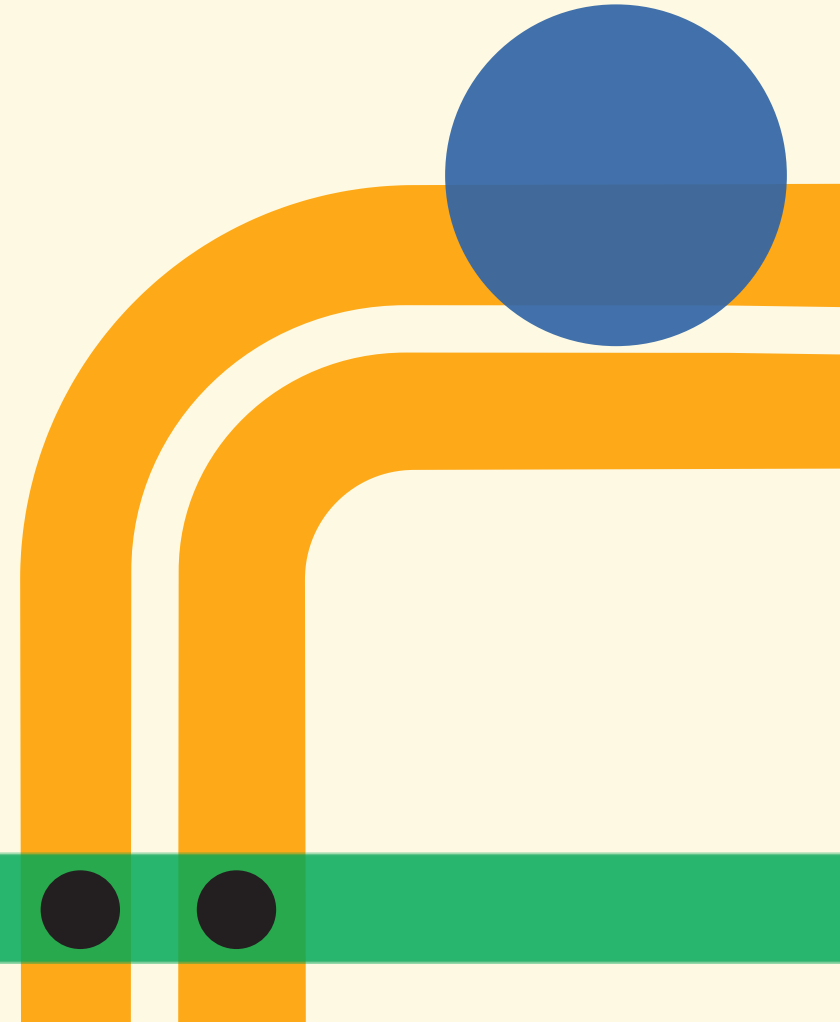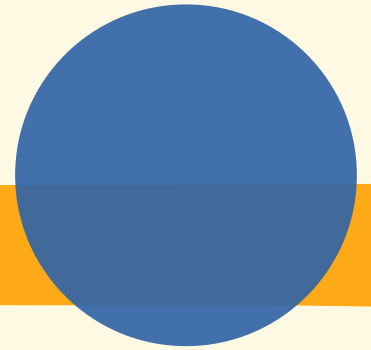



Recommendations:

For Zomato Users

Explore high-rated restaurants (above 4.0) for better experience

Try restaurants with unique features (e.g., craft beer, themed dining)

Don't rely only on big brands—hidden gems may offer better quality

Consider price vs rating balance for best value

Check features and reviews, not just ratings

