



S3 BUCKET

S3 STATIC WEBSITE HOSTING : DEVELOPMENT-FIRST APPROACH 🎯🌐

■ INTRODUCTION

This project demonstrates how to host a static website using AWS S3. It help beginner understand cloud hosting, deployment, and website management in a simple and cost-effective way

✓ REQUIREMENTS

aws Account with S3 access

Basic HTML & CSS knowledge

Website files (HTML, CSS, Images)

Required AWS permission


Internet connection

web browser

✦ DETAILED IMPLEMENTATION GUIDE

1. AWS Management console Access ¶


Navigate to the AWS Management Console :

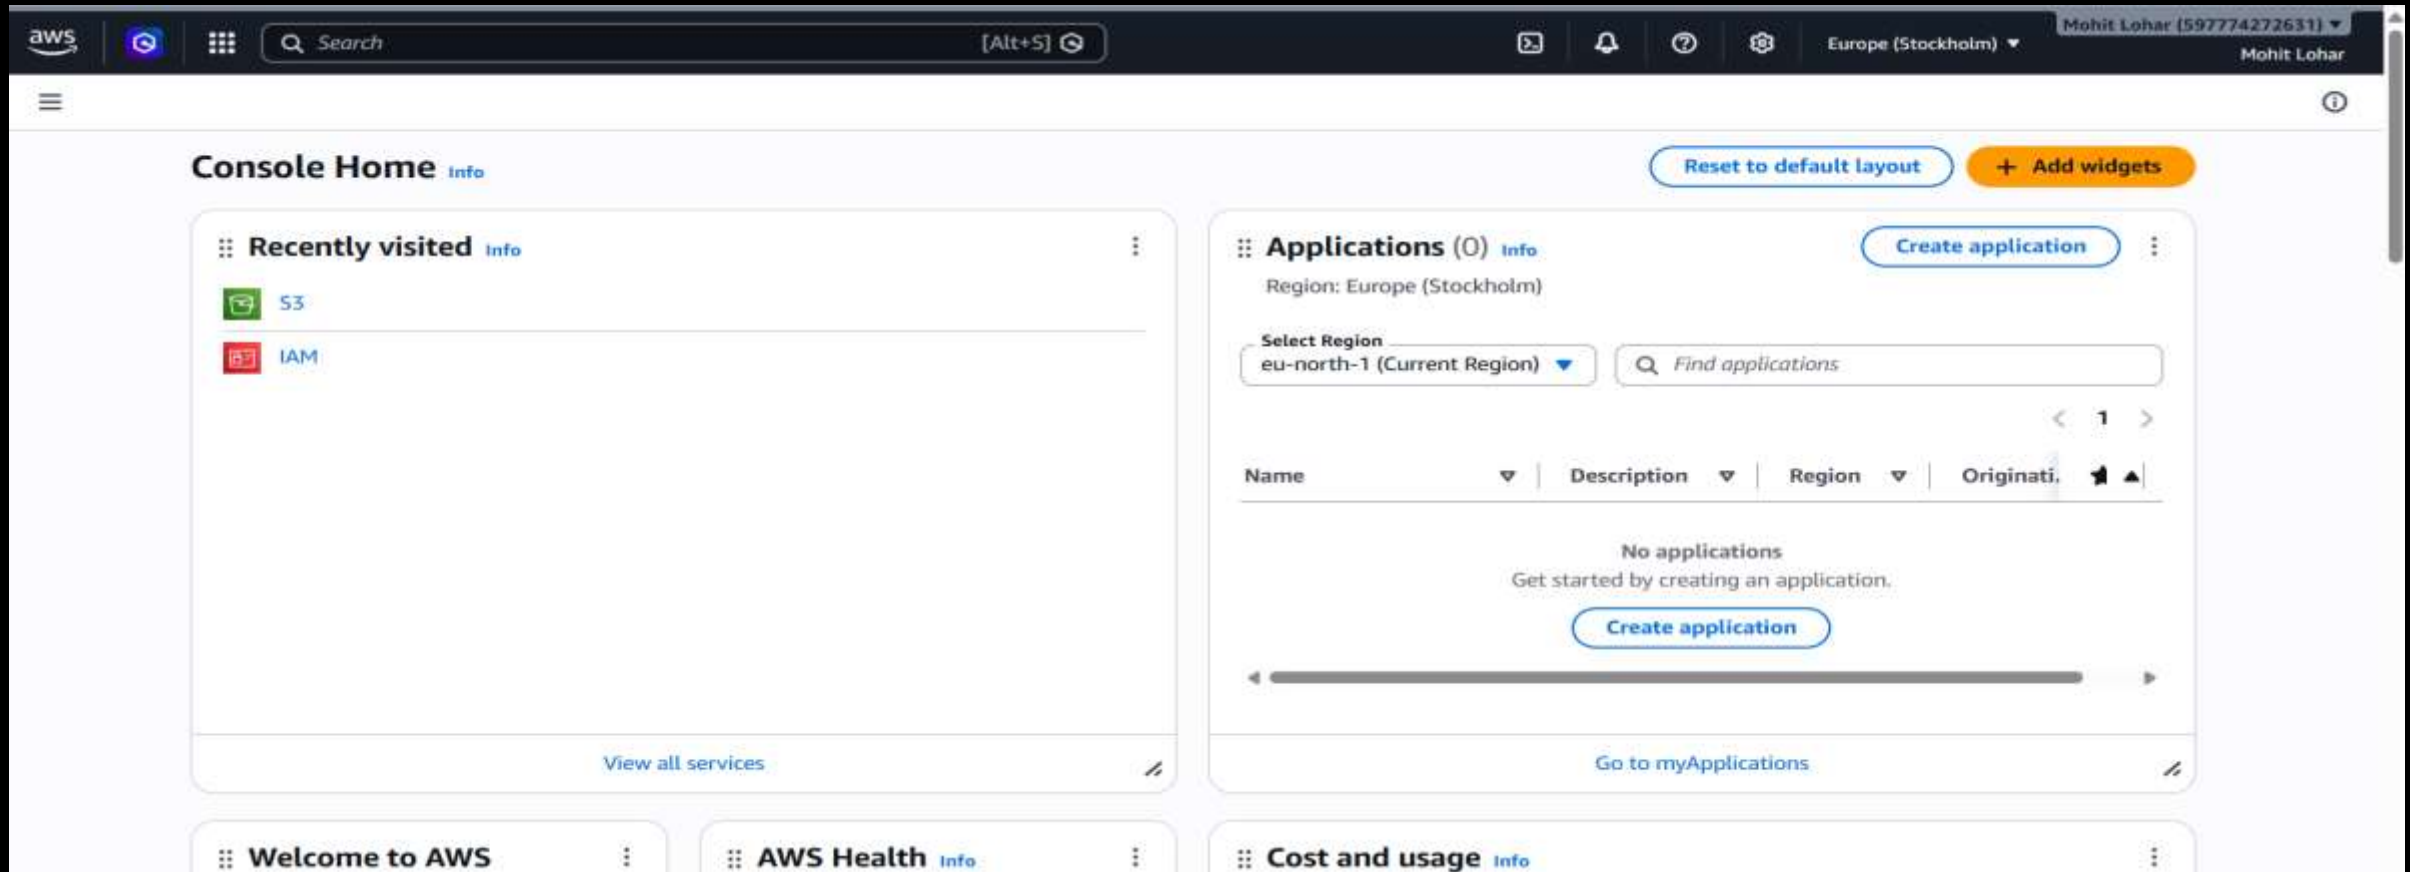

2. LOCATION S3 SERVICE

Access S3 Through :

- AWS Console Search : Type “S3” or “Simple Storage Service”

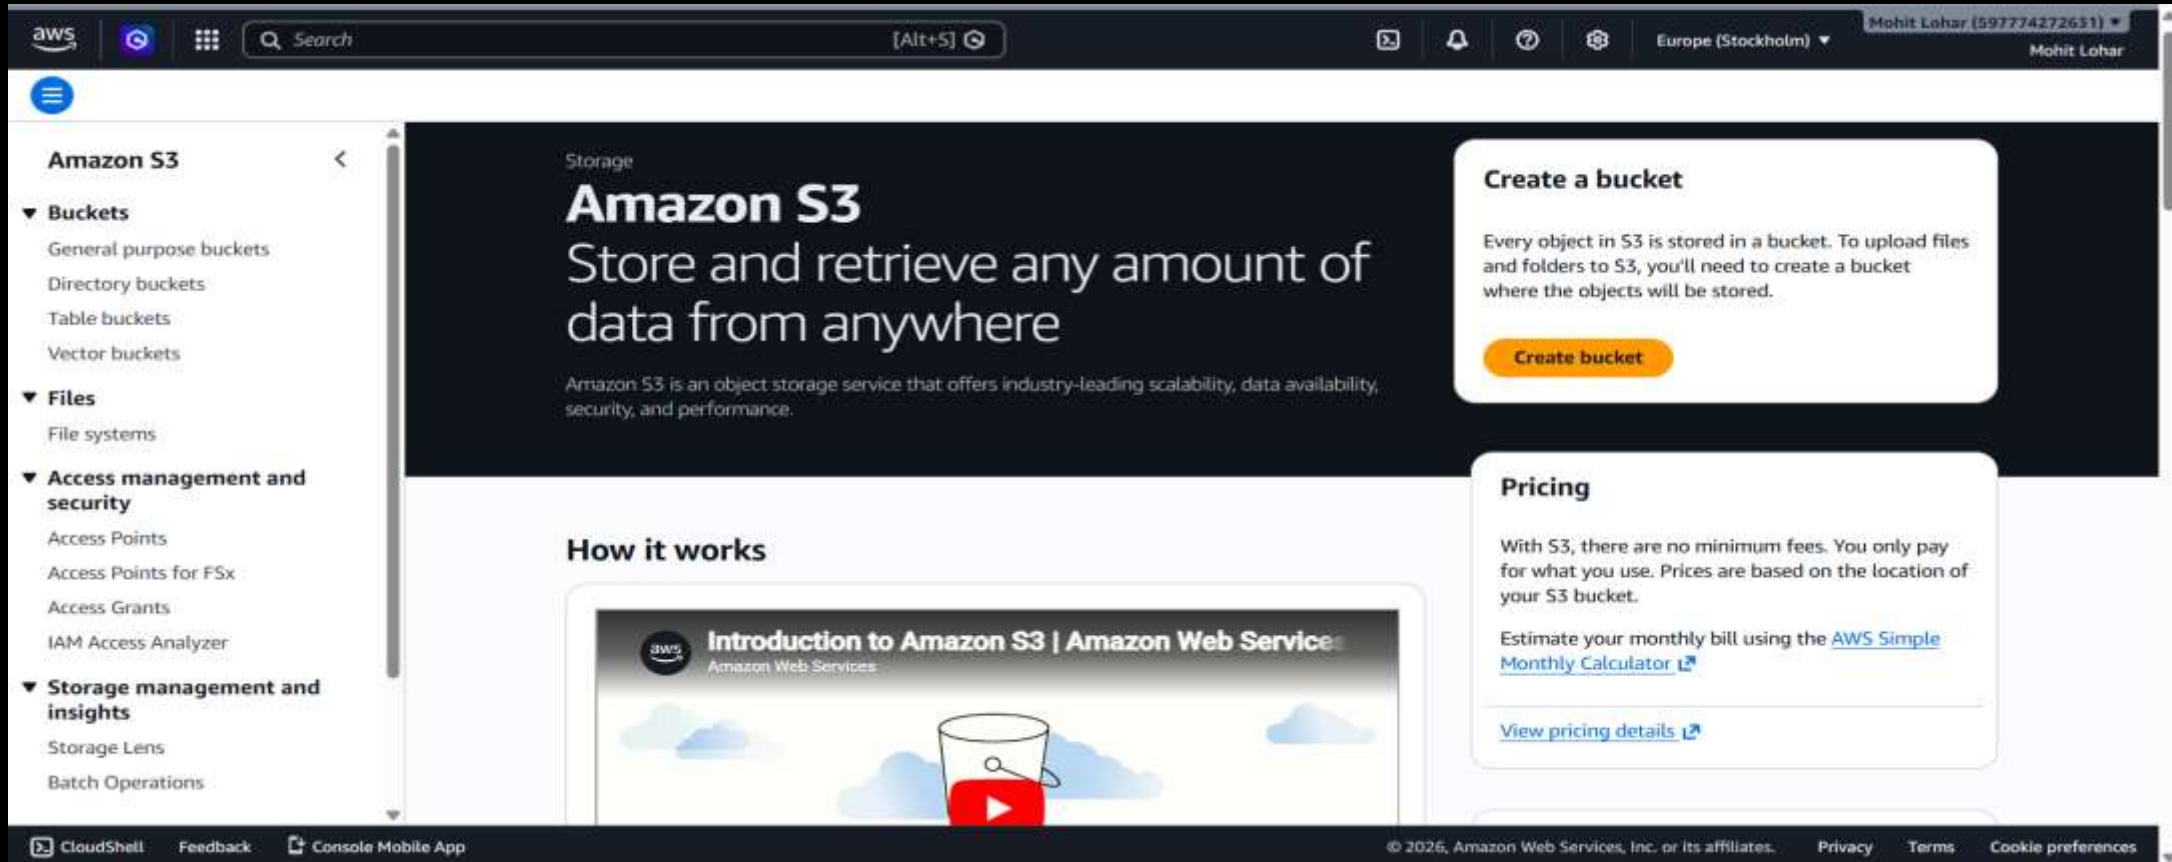

3. BUCKET CREATION AND CONFIGURATION

Essential Settings :

- Bucket Naming Conventions
- Must be globally unique across all AWS
- Should be DNS-compatible
- 3-63 characters long
- Can contain lowercase letters, numbers, dots, and hyphens

Configuration steps :

- Click create bucket



- Enter bucket name following conventions

Amazon S3 > Buckets > Create bucket

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
Europe (Stockholm) eu-north-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket namespace
Choose the namespace where you want to create your bucket. [Learn more](#)

☒ **Global namespace**
By default, S3 creates general purpose buckets in the global namespace.

☐ **Account Regional namespace (recommended)**
General purpose buckets created in your account. Regional namespaces are unique to your account. These buckets can never be created by another AWS account.

Bucket name [Info](#)

my-AWS-bucket-19-june-2026

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Get information about your bucket](#)

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

- Configuration object ownership
 - Select ACLs enable

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Warning We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

- Choose Bucket owner preferred

Object Ownership

☒ Bucket owner preferred

If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.

☐ Object writer

The object writer remains the object owner.

- Uncheck All Block Public Access Options

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through *new* access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through *any* access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through *new* public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through *any* public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

- Acknowledge The Public Access Warning

-  **Turning off block all public access might result in this bucket and the objects within becoming public**
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.
- ☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Default encryption [Info](#)

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)

Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the Storage tab of the [Amazon S3 pricing page](#). [L2](#)

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#) [L2](#)

- ☐ Disable
☒ Enable

► Advanced settings

 After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.


[Cancel](#)

[Create bucket](#)


- Click the “create bucket” Button

Upload Steps :


- Navigate to bucket contents

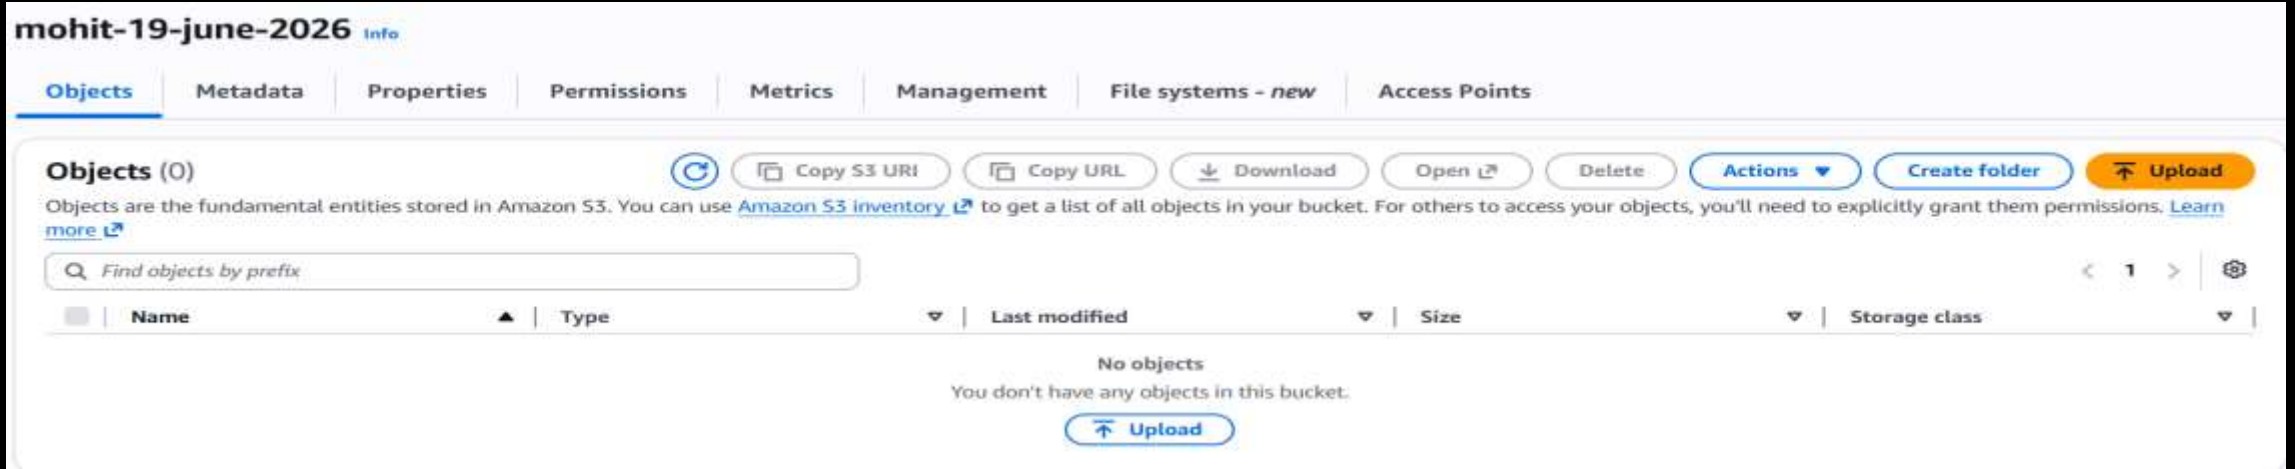

- Click Upload

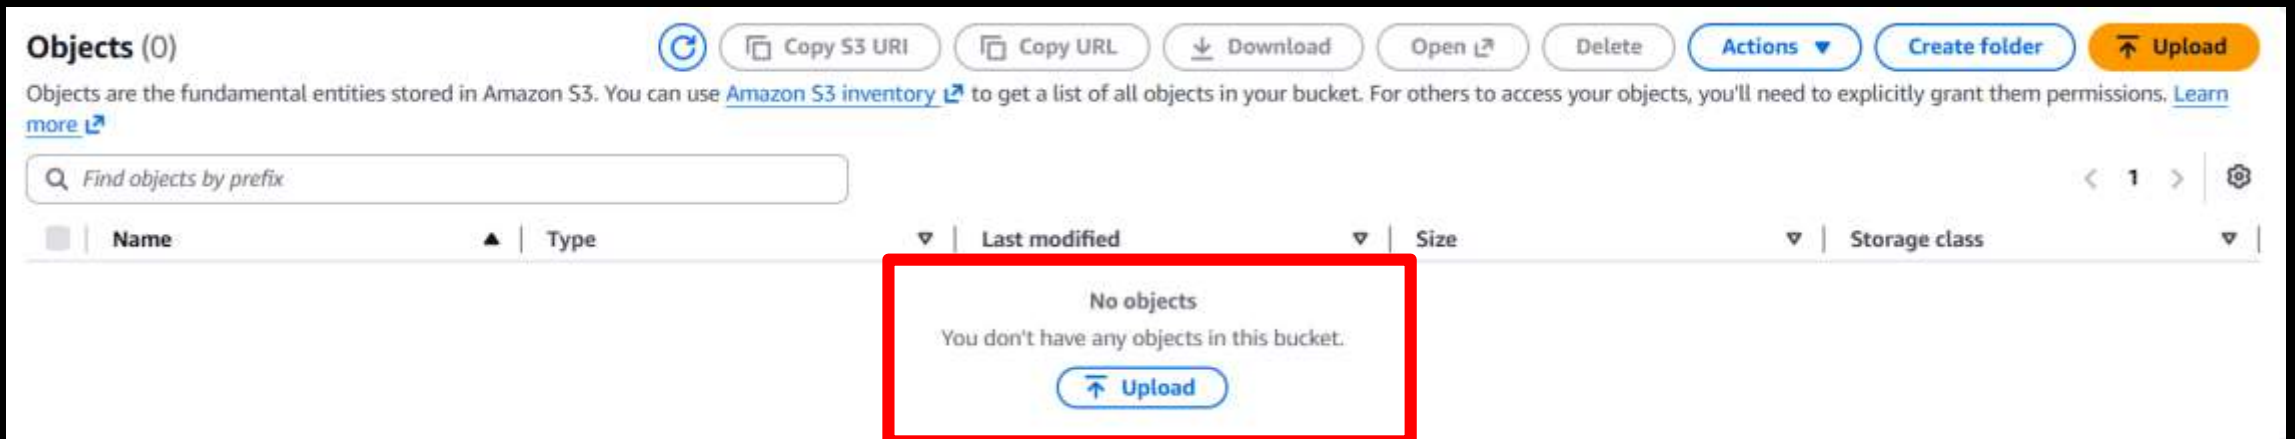

- Configuration upload settings
 - Drag files or use file browser

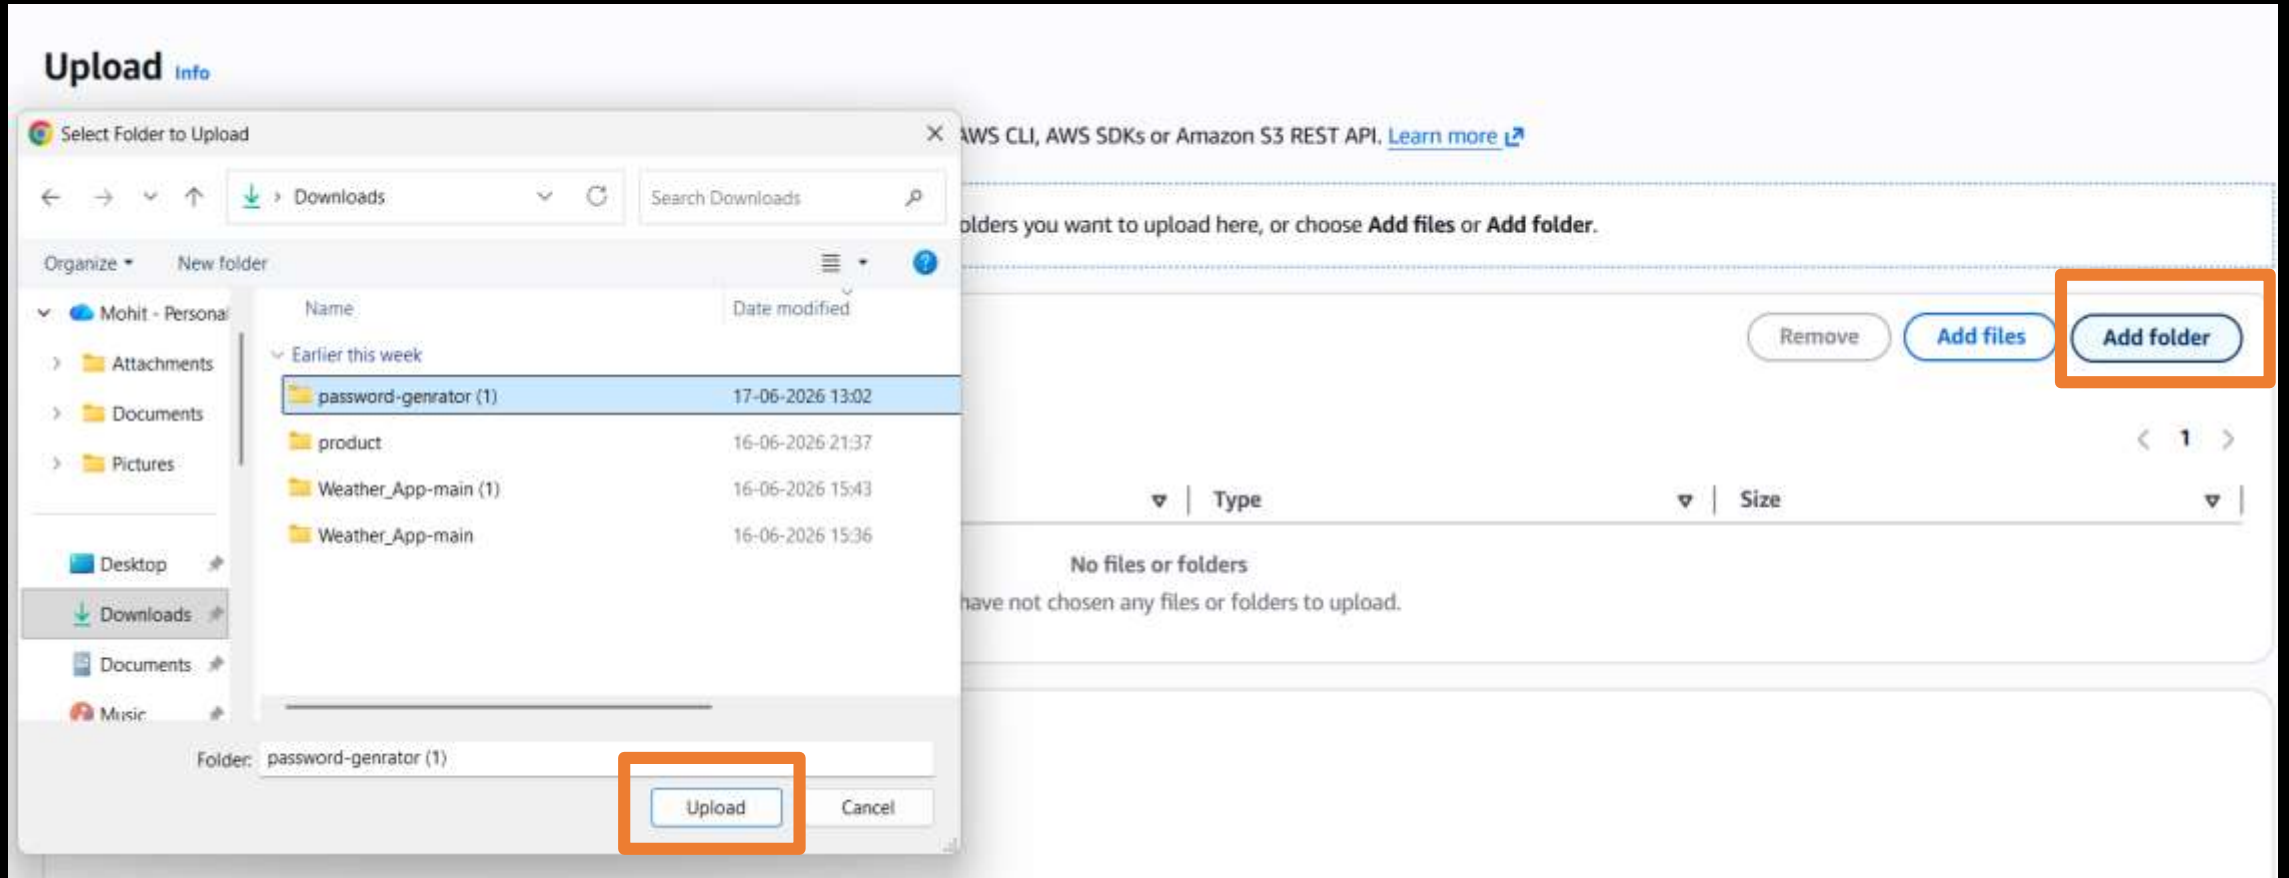

Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (3 total, 5.1 KB)

Remove

Add files

Add folder

All files and folders in this table will be uploaded.

Q Find by name

< 1 >

☐	Name	Folder	Type	Size
☐	index.html	password-generator (1)/password-generator/	text/html	1.7 KB
☐	script.js	password-generator (1)/password-generator/	text/javascript	2.1 KB
☐	style.css	password-generator (1)/password-generator/	text/css	1.4 KB

- Enable public-read access

Access control list (ACL)
Grant basic read/write permissions to other AWS accounts. [Learn more](#)

ⓘ AWS recommends using S3 bucket policies or IAM policies for access control. [Learn more](#)

Access control list (ACL)

☒ Choose from predefined ACLs
☐ Specify individual ACL permissions

Predefined ACLs

☐ Private (recommended)
Only the object owner will have read and write access.

☒ **Grant public-read access**
Anyone in the world will be able to access the specified objects. The object owner will have read and write access. [Learn more](#)

⚠ **Granting public-read access is not recommended**
Anyone in the world will be able to access the specified objects. [Learn more](#)

☒ I understand the risk of granting public-read access to the specified objects.

- Acknowledge public Access Settings

Uploading Cancel

73%

Total remaining: 1 file: 1.4 KB (26.52%)

Estimated time remaining: calculating...

Transfer rate: 0 B/s

- Uploading process

- Click on index.html

Files and folders (3 total, 5.1 KB)

Find by name

Name	Folder	Type	Size	Status	Error
index.html	password-generator/	text/html	1.7 KB	✓ Succeeded	-
script.js	password-generator/	text/javascript	2.1 KB	✓ Succeeded	-
style.css	password-generator/	text/css	1.4 KB	✓ Succeeded	-

index.html

Copy S3 URI Download Open Object actions

Properties Permissions Versions

Object overview

Owner
c65019641658c49d2f807a93955e2b20f0f01c456d9966f96b0eefc07b1fccc3

AWS Region
Europe (Stockholm) eu-north-1

Last modified
June 19, 2026, 19:10:28 (UTC+05:30)

Size
1.7 KB

Type
html

Key
password-generator/index.html

S3 URI
s3://mohit-19-june-2026/password-generator/index.html

Amazon Resource Name (ARN)
arn:aws:s3:::mohit-19-june-2026/password-generator/index.html

Entity tag (Etag)
d2971e46dcb115226a0238897fe10e68

Object URL
<https://mohit-19-june-2026.s3.eu-north-1.amazonaws.com/password-generator/index.html>

✓ S3 Website Hosting Successfully

Password Generator



Password Length

Include uppercase letters ☒

Include lowercase letters ☒

Include numbers ☒

Include symbols ☒