
O-RAN Work Group 3 (Near-Real-time RAN Intelligent Controller and E2 Interface)

Y1 interface: General Aspects and Principles

Copyright © 2026 by the O-RAN ALLIANCE e.V.

The copying or incorporation into any other work of part or all of the material available in this specification in any form without the prior written permission of O-RAN ALLIANCE e.V. is prohibited, save that you may print or download extracts of the material of this specification for your personal use, or copy the material of this specification for the purpose of sending to individual third parties for their information provided that you acknowledge O-RAN ALLIANCE as the source of the material and that you inform the third party that these conditions apply to them and that they must comply with them.

Contents

Foreword.....	3
Modal verbs terminology	3
1 Scope.....	4
2 References	4
2.1 Normative references	4
2.2 Informative references	4
3 Definition of terms, symbols and abbreviations	5
3.1 Terms	5
3.2 Symbols.....	5
3.3 Abbreviations.....	5
4 General Aspects	5
4.1 Reference Model for Y1 interface	5
4.2 Y1 interface general principles	5
4.3 Y1 interface specification objectives.....	5
5 Y1 services and operations.....	6
5.1 Introduction.....	6
5.2 Y1_RAI_Subscription service	6
5.2.1 General	6
5.2.2 RAI_Subscribe service operation.....	6
5.2.3 RAI_Unsubscribe service operation.....	6
5.2.4 RAI_Notify service operation	7
5.3 Y1_RAI_Query service	7
5.3.1 General	7
5.3.2 RAI_Query service operation.....	7
6 Supported information types	8
6.1 Introduction.....	8
6.2 RAI types	8
6.2.1 General	8
6.2.2 RAN performance analytics.....	8
7 Y1 interface protocol structure.....	8
7.1 General.....	8
7.2 Solution 1: HTTP REST with JSON	9
7.2.1 Introduction	9
7.2.2 Network layer.....	9
7.2.3 Transport layer	9
7.2.4 Security.....	9
7.2.5 Application.....	9
7.2.6 Data interchange.....	10
8 Other Y1 interface specifications.....	10
8.1 Y1 interface: Application Protocol	10
8.2 Y1 interface: Type Definitions	10
9 Other Security aspects.....	10
Annex (informative): Change History	11

Foreword

This Technical Specification (TS) has been produced by WG3 of the O-RAN ALLIANCE.

The content of the present document is subject to continuing work within O-RAN and may change following formal O-RAN approval. Should the O-RAN ALLIANCE modify the contents of the present document, it will be re-released by O-RAN with an identifying change of version date and an increase in version number as follows:

version xx.yy.zz

where:

- xx: the first digit-group is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc. (the initial approved document will have xx=01). Always 2 digits with leading zero if needed.
- yy: the second digit-group is incremented when editorial only changes have been incorporated in the document. Always 2 digits with leading zero if needed.
- zz: the third digit-group included only in working versions of the document indicating incremental changes during the editing process. External versions never include the third digit-group. Always 2 digits with leading zero if needed.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the O-RAN Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in O-RAN deliverables except when used in direct citation.

1 Scope

The present document specifies the stage2 definition of the general aspects and principles of the Y1 interface.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies. In the case of a reference to a 3GPP document, a non-specific reference implicitly refers to the latest version of that document in Release 18, or the latest 3GPP release prior to Release 18 that includes that document.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, O-RAN cannot guarantee their long-term validity.

The following referenced documents are necessary for the application of the present document.

- [1] O-RAN.WG1.TS.OAD: "O-RAN Architecture Description".
- [2] O-RAN.WG3.TS.UCR, "Near-Real-time RAN Intelligent Controller, Use Cases and Requirements".
- [3] IETF RFC 9293: "Transmission Control Protocol".
- [4] IETF RFC 5246: "The Transport Layer Security (TLS) Protocol Version 1.2".
- [5] IETF RFC 8446: "The Transport Layer Security (TLS) Protocol Version 1.3".
- [6] IETF RFC 9110: "HTTP Semantics".
- [7] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [8] IETF RFC 8200: "Internet Protocol, Version 6 (IPv6) Specification".
- [9] IETF RFC 791: "Internet Protocol".
- [10] IETF RFC 9112: "HTTP/1.1".
- [11] IETF RFC 9113: "HTTP/2".
- [12] O-RAN.WG11.TS.SecReqCtlSpecs, "Security Requirements and Controls Specification".
- [13] O-RAN.WG3.TS.Y1AP, "Y1 interface: Application Protocol".
- [14] O-RAN.WG3.TS.Y1TD, "Y1 interface: Type Definitions".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies. In the case of a reference to a 3GPP document, a non-specific reference implicitly refers to the latest version of that document in Release 18, or the latest 3GPP release prior to Release 18 that includes that document.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, O-RAN cannot guarantee their long-term validity.

The following referenced documents are not necessary for the application of the present document, but they assist the user with regard to a particular subject area.

- [i.1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [i.1] and O-RAN.WG1.TS.OAD [1] apply.

3.2 Symbols

For the purposes of the present document, the symbols given in 3GPP TR 21.905 [i.1] and O-RAN.WG1.TS.OAD [1] apply.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [i.1], O-RAN.WG1.TS.OAD [1] and the following apply:

RAI	RAN Analytics Information
-----	---------------------------

4 General Aspects

4.1 Reference Model for Y1 interface

As depicted in Figure 4.1-1, the O-RAN architecture [1] supports authorized consumers, which may be O-RAN or 3GPP NFs, to request RAN analytics information from Near-RT RIC via Y1 interface.

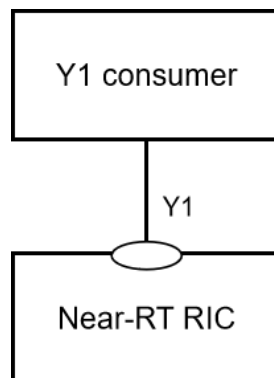


Figure 4.1-1: Reference Model for Y1 interface

4.2 Y1 interface general principles

The general principles for the specification of the Y1 interface are as follows:

- The Y1 interface is an open logical interface that enables services to be accessed by authorized consumers;
- The Y1 interface enables a multi-vendor environment and is independent of specific implementations of the Near-RT RIC;
- The Y1 interface is defined in an extensible way that enables new services and data types to be added without needing to change the protocols or the procedures.

4.3 Y1 interface specification objectives

The Y1 interface shall support the following:

- inter-connection of Near-RT RIC and Y1 consumers.

5 Y1 services and operations

5.1 Introduction

Table 5.1-1 illustrates the services that shall be supported on Y1 interface.

Table 5.1-1: Services supported on Y1 interface

Service Name	Service Operations	Operation Semantics
Y1_RAI_Subscription	RAI_Subscribe	Subscribe / Notify
	RAI_Unsubscribe	
	RAI_Notify	
Y1_RAI_Query	RAI_Query	Request / Response

5.2 Y1_RAI_Subscription service

5.2.1 General

Service Description: This service enables Y1 consumer to subscribe/unsubscribe for RAI.

When the subscription for RAI is accepted by Near-RT RIC, Y1 consumer receives an identifier (Subscription ID) from Near-RT RIC which shall be used to modify or delete this subscription.

5.2.2 RAI_Subscribe service operation

Service operation name: RAI_Subscribe.

Description: Y1 consumer subscribes to RAI.

The request shall include the following parameters:

- RAI type ID: Uniquely identifies the type of RAI;
- Target entity: Information that identifies the entity to which the RAI is related, such as specific UE(s), slice(s), etc.;
- Notification target address: the endpoint for receiving the notification(s) associated with the subscription;
- Notification criteria: indicates the timing or the conditions when the RAI notifications are triggered.

The request may include the following parameters:

- Filter parameters: The conditions for filtering RAI content to be included in the notification.

The response shall include the following parameters:

- Subscription ID, if the subscription is accepted;
- Error response, if the subscription is not accepted.

5.2.3 RAI_Unsubscribe service operation

Service operation name: RAI_Unsubscribe.

Description: Y1 consumer unsubscribes to RAI.

The request shall include the following parameters:

- Subscription ID;

The response shall include the following parameters:

- Operation execution result.

5.2.4 RAI_Notify service operation

Service operation name: RAI_Notify.

Description: Near-RT RIC notifies Y1 consumer of the RAI that has been subscribed to, or termination of the subscription.

The notification shall include the following parameters:

- Subscription ID;
- RAI type ID: see clause 5.2.2;

The notification may include the following parameters:

- The following parameters, if the notification contains RAI:
 - RAI content: The set of attributes that compose a type of RAI, e.g., the longitude/latitude of a hypothetical RAI type “UE Position”;
 - Timestamp of RAI generation: The time when the RAI is generated;
 - Validity period: The time period for which the RAI is valid;
 - Confidence: Probability assertion, if the RAI is a prediction.
- The following parameters, if the notification is to terminate the subscription:
 - Subscription termination indication: Indicates by Near-RT RIC that the subscription can no longer be fulfilled.

The notification acknowledgement shall include the following parameters:

- Operation execution result.

5.3 Y1_RAI_Query service

5.3.1 General

Service description: This service enables Y1 consumer to request and get RAI from Near-RT RIC.

5.3.2 RAI_Query service operation

Service operation name: RAI_Query.

Description: Y1 consumer queries RAI.

The request shall include the following parameters:

- RAI type ID: see clause 5.2.2;
- Target entity: see clause 5.2.2.

The request may include the following parameters:

- Filter parameters: The conditions for filtering RAI content to be included in the response.

The notification acknowledgement shall include the following parameters:

- RAI type ID (see clause 5.2.2), if the request is accepted;
- RAI content (see clause 5.2.4), if the request is accepted;

- Error response, if the request is not accepted.

The notification acknowledgement may include the following parameters:

- Timestamp of RAI generation: see clause 5.2.4;
- Validity period: see clause 5.2.4;
- Confidence: see clause 5.2.4.

6 Supported information types

6.1 Introduction

This clause specifies the information types exposed on Y1 interface.

6.2 RAI types

6.2.1 General

Table 6.2.1-1 shows the RAI types that may be supported on Y1 interface.

Table 6.2.1-1: RAI types supported on Y1 interface

RAI Type ID	Description
RAN performance analytics	Statistics or predictions on the RAN performance.

6.2.2 RAN performance analytics

With RAN performance analytics, Near-RT RIC provides statistics or predictions on the RAN performance [2].

In particular, the following parameter values may be used in a request for this RAI type:

- Target entity:
 - S-NSSAI(s);
 - O-RAN UE ID;
- Filter Parameters:
 - Subset(s) of analytics of this RAI type;

7 Y1 interface protocol structure

7.1 General

One or more solutions in terms of network protocol and data interchange format may be supported by Y1 interface, which are listed in Table 7.1-1. The use of a specific solution by the Near-RT RIC and the Y1 consumer may be pre-configured.

Table 7.1-1: Solution for Y1 interface

Solution	Clause
Solution 1: HTTP REST with JSON	7.2

7.2 Solution 1: HTTP REST with JSON

7.2.1 Introduction

The protocol stack of this solution is shown on Figure 7.2.1-1:

- TCP [3] shall be used to provide the communication service at the transport layer;
- TLS [4][5] shall be supported to provide secure HTTP [6] connections;
- HTTP [6] shall be used as application-level protocol;
- JSON format [7] shall be used in the data interchange layer for the transport of documents.

Data Interchange	JSON
Application	HTTP
Security	TLS
Transport	TCP
Network	IP
Data link	Data link layer
Physical	Physical layer

Figure 7.2.1-1: Illustration of the Y1 protocol stack

7.2.2 Network layer

IPv6 [8] and/or IPv4 [9] may be used as the network layer.

7.2.3 Transport layer

TCP [3] shall be used as transport protocol.

7.2.4 Security

The detailed requirements and protocols for security protection are specified in [12], clauses 5.2.7 and 5.1.3.2.

7.2.5 Application

As application layer, HTTP/1.1 [10] shall be supported, and HTTP/2 [11] should be supported. The HTTP semantics as defined in [6] shall be supported.

HTTP over TLS [6] shall be supported.

HTTP details such as use of standard headers, custom headers, error codes, methods, URIs etc. are specified in Application Protocols for Y1 interface [13].

The default TCP port numbers should be used for HTTP operation.

7.2.6 Data interchange

As a data interchange format, JSON [7] shall be supported.

8 Other Y1 interface specifications

8.1 Y1 interface: Application Protocol

Y1AP [13] specifies the Y1 interface application protocols.

8.2 Y1 interface: Type Definitions

Y1TD [14] specifies the detailed information types (e.g., RAI types) for Y1 interface.

9 Other Security aspects

Void.

Annex (informative): Change History

Date	Revision	Description
2023.01.10	00.00.01	Create the skeleton.
2023.03.23	00.00.02	Implemented CMCC-2023.02.02-WG3-CR-0002-Y1GAP-General Aspects in Section 4-v02.docx CMCC-2023.02.27-WG3-CR-0003-Y1GAP-Y1 services and [operations] in Section 5-v01.docx
2023.04.18	00.00.03	Implemented CMCC-2023.03.31-WG3-CR-0004-Y1GAP-Supported information types in Section 6-v04.docx CMCC-2023.04.10-WG3-CR-0005-Y1GAP- Y1 interface protocol structure in Section 7-v03.docx
2023.10.31	00.00.04	Implemented CMCC-2023.09.04-WG3-CR-0007-Y1GAP-Modification for the attribute of API-v01.docx CMCC-2023.06.13-WG3-CR-0006-Y1GAP-Text for security aspects-v02.docx and editorial changes.
2023.11.17	00.00.05	Editorial changes according to the review comments during WG3 poll.
2023.11.18	01.00	Version incremented for publication.
2024.07.05	01.00.01	Implemented CMCC-2024.05.10-WG3-CR-0008-Y1GAP-Editorial corrections for ODR alignment-v01.docx and editorial changes.
2024.07.22	01.00.02	Editorial changes according to the review comments during WG3 poll.
2024.07.26	01.01	Version incremented for TSC.
2025.11.11	01.01.01	Implemented CMCC-2025.10.10-WG3-CR-0009-Y1GAP-Editing for ODR alignment-v01.docx and editorial changes.
2025.12.08	01.02	Version incremented for TSC.