

#### adv devops 4

Name - Mohit Shadija

Div - D15B

Roll - 54

**Step 1:** Log in to your AWS Academy/personal account and launch a new Ec2 Instance. Select Ubuntu as AMI and t2.medium as Instance Type, create a key of type RSA with .pem extension, and move the downloaded key to the new folder.

Note: A minimum of 2 CPUs are required so Please select t2.medium and do not forget to stop the instance after the experiment because it is not available in the free tier.

Recents

Quick Start

Amazon Linux

aws

macOS

Mac

Ubuntu

ubuntu

Windows

Microsoft

Red Hat

Red Hat

SUSE Li

SUSE

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Ubuntu Server 24.04 LTS (HVM), SSD Volume Type  
ami-0866a3c8686eaebea (64-bit (x86)) / ami-0325498274077fac5 (64-bit (Arm))  
Virtualization: hvm   ENA enabled: true   Root device type: ebs

Free tier eligible

Description

Ubuntu Server 24.04 LTS (HVM),EBS General Purpose (SSD) Volume Type. Support available from Canonical (<http://www.ubuntu.com/cloud/services>).

Architecture

AMI ID

Username

64-bit (x86)

ami-0866a3c8686eaebea

ubuntu

Verified provider

▼ Instance type

Info | Get advice

Instance type

t2.medium  
Family: t2   2 vCPU   4 GiB Memory   Current generation: true  
On-Demand Linux base pricing: 0.0464 USD per Hour  
On-Demand RHEL base pricing: 0.0752 USD per Hour  
On-Demand Windows base pricing: 0.0644 USD per Hour  
On-Demand SUSE base pricing: 0.1464 USD per Hour


All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

## Step 2

: After creating the instance click on Connect the instance and navigate to SSH Client.

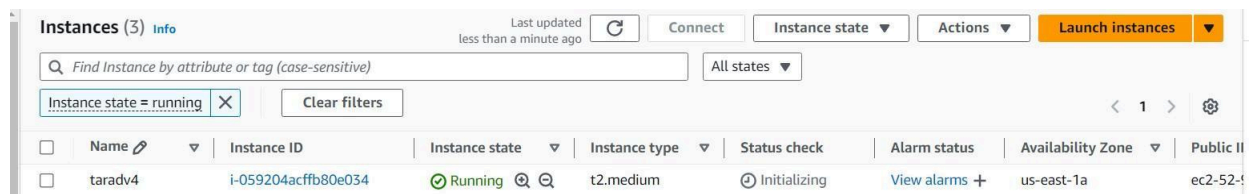

**Step 3:** Now open the folder in the terminal where our .pem key is stored and paste the Example

command (starting with `ssh -i` ) in the terminal.( `ssh -i "Master_Ec2_Key.pem" ubuntu@ec2-54-196-129-215.compute-1.amazonaws.com`)

**Step 4:** Run the below commands to install and setup Docker.

```
curl -fsSL https://download.docker.com/linux/ubuntu/gpg | sudo apt-key add -
curl -fsSL https://download.docker.com/linux/ubuntu/gpg | sudo tee
/etc/apt/trusted.gpg.d/docker.gpg > /dev/null
sudo add-apt-repository "deb [arch=amd64] https://download.docker.com/linux/ubuntu
$(lsb_release -cs) stable"
```

```
ubuntu@ip-172-31-95-62:~$ curl -fsSL https://download.docker.com/linux/ubuntu/gpg | sudo apt-key add -
curl -fsSL https://download.docker.com/linux/ubuntu/gpg | sudo tee
/etc/apt/trusted.gpg.d/docker.gpg > /dev/null
Warning: apt-key is deprecated. Manage keyring files in trusted.gpg.d instead (see apt-key(8)).
OK
-----BEGIN PGP PUBLIC KEY BLOCK-----

mQINBfit2ioBEADhWpZ8/wvZ6hUTiXOWQHXMALaFHCpH9hAtr4F1y2+OYdbtMuth
lqqwp028AqyY+PRfVMTsYMBjuQuu5byyKR01BbqYhuS3jtqQmljZ/bJvXqnmVXh
38UuLa+z077PxyxQhu5BbqntTPQMfiyqEiU+BKbq2WmANUKQf+1AmZY/IruOXbnq
L4C1+gJ8vfmXQt99npCaxEjaNRVYfOS8QcixNZHUynb6emjLANyEV1Zzeqo7XK17
UrwV5inawTSzWNvtjEjj4nJL8NsLwscLPQUhTQ+7BbQXAwAmeHCUTQIvvWXqW0N
cmhh4HgeQscQHYgOJjjDVfoY5MucvqlbIgCqfzAHW9jxmRL4qbMZj+b1XoePEtth
ku4bIQN1X5P07fNWzlgARL5Z4POXDD2TlIQ/E158j9kp4bnWRCJW01ya+f8ocodo
vZZ+Doi+fy4D5ZGrL4XecIQP/Lv5uFyf+kQt1/94VFYVJoleAv8W92KdgDkhTcTD
G7c0tIkVEKNUq48b3aQ64NOZQW7fVjfoKwEZdOqPE72Pa45jr2zvUFxSpdiNk2tZ
XYukHj1xxEgBdC/J3cMMNRE1F4NCA3ApfV1Y7/hTeOnmDuDYwr9/obA8t016Y1jj
q5rdkywPf4JF8mXUW5eCN1vAFHxeg9ZWemhBtQmGxXnw9M+z6hWwc6ahmwARAQAB
tCtEb2NrZXIgaUmVsZWZfZzZSAoQ0UgZGVikaSA8ZG9ja2VyQGRvY2tldci5jb20+iQI3
BBMBCgAhBQJYrefAAhsvBQsJCACDBRUKCQgLBRYCAwEAAh4BAheAAAOJEI2BgDwo
v82IsskP/iQZo68fLDQmNvn8X5XTd6RRaUH33kXYXquT6NkHJciS7E2gtJmqvMqd

ubuntu@ip-172-31-95-62:~$ sudo add-apt-repository "deb [arch=amd64] https://download.docker.com/linux/ubuntu
$(lsb_release -cs) stable"
Repository: 'deb [arch=amd64] https://download.docker.com/linux/ubuntu noble stable'
Description:
Archive for codename: noble components: stable
More info: https://download.docker.com/linux/ubuntu
Adding repository.
Press [ENTER] to continue or Ctrl-c to cancel.
Adding deb entry to /etc/apt/sources.list.d/archive_uri=https_download_docker_com_linux_ubuntu-noble.list
Adding disabled deb-src entry to /etc/apt/sources.list.d/archive_uri=https_download_docker_com_linux_ubuntu-noble.list
Hit:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble InRelease
Get:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease [126 kB]
```

**sudo apt-get update**

**sudo apt-get install -y docker-ce**

```
ubuntu@ip-172-31-95-62:~$ sudo apt-get update
sudo apt-get install -y docker-ce
Hit:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble InRelease
Hit:2 https://download.docker.com/linux/ubuntu noble InRelease
Hit:3 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:4 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-backports InRelease
Hit:5 http://security.ubuntu.com/ubuntu noble-security InRelease
Reading package lists... Done
W: https://download.docker.com/linux/ubuntu/dists/noble/InRelease: Key is stored in legacy trusted.gpg keyring (/etc/apt/trusted.gpg), see the DEPRECATION section in apt-key(8) for details.
Reading package lists... Done
Building dependency tree... Done

Setting up docker-buildx-plugin (0.17.1-1~ubuntu.24.04~noble) ...
Setting up containerd.io (1.7.22-1) ...
Created symlink /etc/systemd/system/multi-user.target.wants/containerd.service → /usr/lib/systemd/system/containerd.service.
Setting up docker-compose-plugin (2.29.7-1~ubuntu.24.04~noble) ...
Setting up libltdl7:amd64 (2.4.7-7build1) ...
Setting up docker-ce-cli (5:27.3.1-1~ubuntu.24.04~noble) ...
Setting up libsllp0:amd64 (4.7.0-1ubuntu3) ...
Setting up pigz (2.8-1) ...
Setting up docker-ce-rootless-extras (5:27.3.1-1~ubuntu.24.04~noble) ...
Setting up slirp4netns (1.2.1-1build2) ...
Setting up docker-ce (5:27.3.1-1~ubuntu.24.04~noble) ...
Created symlink /etc/systemd/system/multi-user.target.wants/docker.service → /usr/lib/systemd/system/docker.service.
Created symlink /etc/systemd/system/sockets.target.wants/docker.socket → /usr/lib/systemd/system/docker.socket.
Processing triggers for man-db (2.12.0-4build2) ...
Processing triggers for libc-bin (2.39-0ubuntu8.3) ...
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-95-62:~$
```

**sudo mkdir -p /etc/docker**

**cat <<EOF | sudo tee /etc/docker/daemon.json**

```
{
"exec-opts": ["native.cgroupdriver=systemd"]
}
EOF
```

```
GNU nano 7.2 /
{
"exec-opts": ["native.cgroupdriver=systemd"]
}
```

**sudo systemctl enable docker**

**sudo systemctl daemon-reload**

**sudo systemctl restart docker**

```
Synchronizing state of docker.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable docker
ubuntu@ip-172-31-95-62:~$ sudo systemctl daemon-reload
ubuntu@ip-172-31-95-62:~$ sudo systemctl restart docker
ubuntu@ip-172-31-95-62:~$
```

**Step 5: Run the below command to install Kubernets.**

```
curl -fsSL https://pkgs.k8s.io/core:/stable:/v1.31/deb/Release.key | sudo gpg
--dearmor -o
/etc/apt/keyrings/kubernetes-apt-keyring.gpg
echo 'deb [signed-by=/etc/apt/keyrings/kubernetes-apt-keyring.gpg]
https://pkgs.k8s.io/core:/stable:/v1.31/deb/ /' | sudo tee
/etc/apt/sources.list.d/kubernetes.list
```

```
ubuntu@ip-172-31-95-62:~$ curl -fsSL https://pkgs.k8s.io/core:/stable:/v1.31/deb/Release.key | sudo gpg --dearmor -o /etc/apt/keyrings/kubernetes-apt-keyring.gpg
ubuntu@ip-172-31-95-62:~$ echo 'deb [signed-by=/etc/apt/keyrings/kubernetes-apt-keyring.gpg]
https://pkgs.k8s.io/core:/stable:/v1.31/deb/ /' | sudo tee /etc/apt/sources.list.d/kubernetes.list
deb [signed-by=/etc/apt/keyrings/kubernetes-apt-keyring.gpg]
https://pkgs.k8s.io/core:/stable:/v1.31/deb/ /
ubuntu@ip-172-31-95-62:~$
```

**sudo apt-get update**

**sudo apt-get install -y kubelet kubeadm kubectl**

**sudo apt-mark hold kubelet kubeadm kubectl**

```
ubuntu@ip-172-31-95-62:~$ sudo apt-get update
Hit:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble InRelease
Hit:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:3 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-backports InRelease
Hit:4 http://security.ubuntu.com/ubuntu noble-security InRelease
Hit:5 https://download.docker.com/linux/ubuntu noble InRelease
Err:6 https://prod-cdn.packages.k8s.io/repositories/isv:/kubernetes:/core:/stable:/v1.31/deb $(lsb_release InRelease
  403 Forbidden [IP: 108.138.64.44 443]
Reading package lists... Done
W: https://download.docker.com/linux/ubuntu/dists/noble/InRelease: Key is stored in legacy trusted.gpg keyring (/etc/apt/trusted.gpg), see the DEPRECATION section in apt-key(8) for details.
E: Failed to fetch https://pkgs.k8s.io/core:/stable:/v1.31/deb/dists/$(lsb_release InRelease 403 Forbidden [IP: 108.138.64.44 443]
E: The repository 'https://pkgs.k8s.io/core:/stable:/v1.31/deb $(lsb_release InRelease' is not signed.
N: Updating from such a repository can't be done securely, and is therefore disabled by default.
N: See apt-secure(8) manpage for repository creation and user configuration details.
ubuntu@ip-172-31-95-62:~$
```

```
ubuntu@ip-172-31-81-58:~$ sudo systemctl enable docker
Synchronizing state of docker.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable docker
ubuntu@ip-172-31-81-58:~$ sudo systemctl daemon-reload
ubuntu@ip-172-31-81-58:~$ sudo systemctl restart docker
ubuntu@ip-172-31-81-58:~$
```

**Step 5: Run the below command to install Kubernets.**

```
curl -fsSL https://pkgs.k8s.io/core:/stable:/v1.31/deb/Release.key | sudo gpg
--dearmor -o
/etc/apt/keyrings/kubernetes-apt-keyring.gpg

echo 'deb [signed-by=/etc/apt/keyrings/kubernetes-apt-keyring.gpg]
https://pkgs.k8s.io/core:/stable:/v1.31/deb/ /' | sudo tee
/etc/apt/sources.list.d/kubernetes.list
```

```
ubuntu@ip-172-31-81-58:~$ sudo mkdir -p /etc/apt/keyrings/
curl -fsSL https://pkgs.k8s.io/core:/stable:/v1.31/deb/Release.key | sudo gpg --dearmor -o /etc/apt/keyrings/kubernetes-apt-keyring.gpg
ubuntu@ip-172-31-81-58:~$ echo 'deb [signed-by=/etc/apt/keyrings/kubernetes-apt-keyring.gpg]
https://pkgs.k8s.io/core:/stable:/v1.31/deb/ /' | sudo tee /etc/apt/sources.list.d/kubernetes.list
deb [signed-by=/etc/apt/keyrings/kubernetes-apt-keyring.gpg]
https://pkgs.k8s.io/core:/stable:/v1.31/deb/ /
ubuntu@ip-172-31-81-58:~$
```



**sudo apt-get update**

**sudo apt-get install -y kubelet kubeadm kubectl**

**sudo apt-mark hold kubelet kubeadm kubectl**

```
ubuntu@ip-172-31-81-58:~$ sudo apt-get update
Hit:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble InRelease
Hit:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:3 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-backports InRelease
Hit:4 https://download.docker.com/linux/ubuntu noble InRelease
Hit:5 http://security.ubuntu.com/ubuntu noble-security InRelease
Hit:6 https://prod-cdn.packages.k8s.io/repositories/isv:/kubernetes:/core:/stable:/v1.31/deb InRelease
Reading package lists... Done
W: https://download.docker.com/linux/ubuntu/dists/noble/InRelease: Key is stored in legacy trusted.gpg keyring (/etc/apt/trusted.gpg), see the DEPRECATION section in apt-key(8) for details.
ubuntu@ip-172-31-81-58:~$ sudo apt-get install -y kubelet kubeadm kubectl
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
kubelet is already the newest version (1.31.1-1.1).
kubeadm is already the newest version (1.31.1-1.1).
kubectl is already the newest version (1.31.1-1.1).
0 upgraded, 0 newly installed, 0 to remove and 12 not upgraded.
ubuntu@ip-172-31-81-58:~$ sudo apt-mark hold kubelet kubeadm kubectl
kubelet was already set on hold.
kubeadm was already set on hold.
kubectl was already set on hold.
ubuntu@ip-172-31-81-58:~$
```

**sudo systemctl enable --now kubelet**

**sudo kubeadm init --pod-network-cidr=10.244.0.0/16**

```
Your Kubernetes control-plane has initialized successfully!

To start using your cluster, you need to run the following as a regular user:

  mkdir -p $HOME/.kube
  sudo cp -i /etc/kubernetes/admin.conf $HOME/.kube/config
  sudo chown $(id -u):$(id -g) $HOME/.kube/config

Alternatively, if you are the root user, you can run:

  export KUBECONFIG=/etc/kubernetes/admin.conf

You should now deploy a pod network to the cluster.
Run "kubectl apply -f [podnetwork].yaml" with one of the options listed at:
  https://kubernetes.io/docs/concepts/cluster-administration/addons/

Then you can join any number of worker nodes by running the following on each as root:

kubeadm join 172.31.81.58:6443 --token xo7et0.1j18rho6zn4kr5dw \
--discovery-token-ca-cert-hash sha256:90ccf368d2fbd70e046a09b4f0a8be84de4b4e91760180fe716d788a13afd5c8
ubuntu@ip-172-31-81-58:~$
```

**sudo apt-get install -y containerd**

```
ubuntu@ip-172-31-81-58:~$ sudo apt-get install -y containerd
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following packages were automatically installed and are no longer required:
  docker-buildx-plugin docker-ce-cli docker-ce-rootless-extras docker-compose-plugin libltdl7 libslirp0 pigz
  slirp4netns
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  runc
The following packages will be REMOVED:
  containerd.io docker-ce
The following NEW packages will be installed:
  containerd runc
0 upgraded, 2 newly installed, 2 to remove and 12 not upgraded.
Need to get 47.2 MB of archives.
After this operation, 53.1 MB disk space will be freed.
Get:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 runc amd64 1.1.12-0ubuntu3.1 [8599 kB]
Get:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 containerd amd64 1.7.12-0ubuntu4.1 [38.6 MB]
Fetched 47.2 MB in 1s (51.3 MB/s)
(Reading database ... 68202 files and directories currently installed.)
Removing docker-ce (5:27.3.1-1~ubuntu.24.04~noble) ...
Removing containerd.io (1.7.22-1) ...
Selecting previously unselected package runc.
(Reading database ... 68182 files and directories currently installed.)
Preparing to unpack .../runc_1.1.12-0ubuntu3.1_amd64.deb ...
Unpacking runc (1.1.12-0ubuntu3.1) ...
```

**sudo mkdir -p /etc/containerd**

**sudo containerd config default | sudo tee /etc/containerd/config.toml**

```
ubuntu@ip-172-31-81-58:~$ sudo apt-get install -y containerd
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following packages were automatically installed and are no longer required:
  docker-buildx-plugin docker-ce-cli docker-ce-rootless-extras docker-compose-plugin libltdl7 libslirp0 pigz
  slirp4netns
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  runc
The following packages will be REMOVED:
  containerd.io docker-ce
The following NEW packages will be installed:
  containerd runc
0 upgraded, 2 newly installed, 2 to remove and 12 not upgraded.
Need to get 47.2 MB of archives.
After this operation, 53.1 MB disk space will be freed.
Get:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 runc amd64 1.1.12-0ubuntu3.1 [8599 kB]
Get:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 containerd amd64 1.7.12-0ubuntu4.1 [38.6 MB]
Fetched 47.2 MB in 1s (51.3 MB/s)
(Reading database ... 68202 files and directories currently installed.)
Removing docker-ce (5:27.3.1-1~ubuntu.24.04~noble) ...
Removing containerd.io (1.7.22-1) ...
Selecting previously unselected package runc.
(Reading database ... 68182 files and directories currently installed.)
Preparing to unpack .../runc_1.1.12-0ubuntu3.1_amd64.deb ...
Unpacking runc (1.1.12-0ubuntu3.1) ...
Selecting previously unselected package containerd.
Preparing to unpack .../containerd_1.7.12-0ubuntu4.1_amd64.deb ...
```

**sudo systemctl restart containerd**

**sudo systemctl enable containerd**

**sudo systemctl status containerd**

```
ubuntu@ip-172-31-81-58:~$ sudo systemctl restart containerd
sudo systemctl enable containerd
sudo systemctl status containerd
● containerd.service - containerd container runtime
   Loaded: loaded (/usr/lib/systemd/system/containerd.service; enabled; preset: enabled)
   Active: active (running) since Sat 2024-10-12 17:41:02 UTC; 340ms ago
     Docs: https://containerd.io
   Main PID: 65436 (containerd)
    Tasks: 76
   Memory: 848.3M (peak: 882.1M)
    CPU: 192ms
   CGroup: /system.slice/containerd.service
           └─59222 /usr/bin/containerd-shim-runc-v2 -namespace k8s.io -id 9215d752e3e0d11ceb7c06808e1da15801d4bd4e3e>
           └─59254 /usr/bin/containerd-shim-runc-v2 -namespace k8s.io -id 68fe30e46f67f161694c173dce279a90659af718e5e>
           └─59255 /usr/bin/containerd-shim-runc-v2 -namespace k8s.io -id d78e94e5b8cae6461d40ba39b9511b0f364cc8149c2>
           └─59269 /usr/bin/containerd-shim-runc-v2 -namespace k8s.io -id a62b6834d6bf50383b11e7d9125f19a207e618f818c>
           └─60502 /usr/bin/containerd-shim-runc-v2 -namespace k8s.io -id 6b11b124d1ef987cdcf30ea3b420fdb856f3704e7182>
           └─65436 /usr/bin/containerd

Oct 12 17:41:02 ip-172-31-81-58 containerd[65436]: time="2024-10-12T17:41:02.705286131Z" level=info msg="Start subscrib>
Oct 12 17:41:02 ip-172-31-81-58 containerd[65436]: time="2024-10-12T17:41:02.705339862Z" level=info msg="serving... addr>
Oct 12 17:41:02 ip-172-31-81-58 containerd[65436]: time="2024-10-12T17:41:02.705485592Z" level=info msg="serving... addr>
Oct 12 17:41:02 ip-172-31-81-58 containerd[65436]: time="2024-10-12T17:41:02.705438787Z" level=info msg="Start recoveri>
Oct 12 17:41:02 ip-172-31-81-58 containerd[65436]: time="2024-10-12T17:41:02.754249626Z" level=info msg="Start event mo>
Oct 12 17:41:02 ip-172-31-81-58 containerd[65436]: time="2024-10-12T17:41:02.754288030Z" level=info msg="Start snapshot>
Oct 12 17:41:02 ip-172-31-81-58 containerd[65436]: time="2024-10-12T17:41:02.754298717Z" level=info msg="Start cni netw>
Oct 12 17:41:02 ip-172-31-81-58 containerd[65436]: time="2024-10-12T17:41:02.754305487Z" level=info msg="Start streamin>
Oct 12 17:41:02 ip-172-31-81-58 containerd[65436]: time="2024-10-12T17:41:02.754367810Z" level=info msg="containerd suc>
Oct 12 17:41:02 ip-172-31-81-58 systemd[1]: Started containerd.service - containerd container runtime.
lines 1-26/26 (END)
```

**sudo apt-get install -y socat**

```
ubuntu@ip-172-31-81-58:~$ sudo apt-get install -y socat
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
socat is already the newest version (1.8.0.0-4build3).
The following packages were automatically installed and are no longer required:
  docker-buildx-plugin docker-ce-cli docker-ce-rootless-extras docker-compose-plugin libltdl7 libslirp0 pigz
  slirp4netns
Use 'sudo apt autoremove' to remove them.
0 upgraded, 0 newly installed, 0 to remove and 12 not upgraded.
ubuntu@ip-172-31-81-58:~$
```

## Step 6: Initialize the Kubecluster

**sudo kubeadm init --pod-network-cidr=10.244.0.0/16**

```
ubuntu@ip-172-31-81-58:~$ sudo kubeadm init --pod-network-cidr=10.244.0.0/16
I1012 17:46:30.745964 75542 version.go:256] remote version is much newer: v1.31.1; falling back to: stable-1.27
[init] Using Kubernetes version: v1.27.16
[preflight] Running pre-flight checks
[preflight] Pulling images required for setting up a Kubernetes cluster
[preflight] This might take a minute or two, depending on the speed of your internet connection
[preflight] You can also perform this action in beforehand using 'kubeadm config images pull'
W1012 17:46:31.007101 75542 images.go:80] could not find officially supported version of etcd for Kubernetes v1.27.16,
falling back to the nearest etcd version (3.5.7-0)
W1012 17:46:31.089344 75542 checks.go:835] detected that the sandbox image "registry.k8s.io/pause:3.8" of the container
runtime is inconsistent with that used by kubeadm. It is recommended that using "registry.k8s.io/pause:3.9" as the CRI
sandbox image.
[certs] Using certificateDir folder "/etc/kubernetes/pki"
[certs] Using existing ca certificate authority
[certs] Using existing apiserver certificate and key on disk
[certs] Using existing apiserver-kubelet-client certificate and key on disk
[certs] Using existing front-proxy-ca certificate authority
[certs] Using existing front-proxy-client certificate and key on disk
[certs] Using existing etcd/ca certificate authority
[certs] Using existing etcd/server certificate and key on disk
[certs] Using existing etcd/peer certificate and key on disk
[certs] Using existing etcd/healthcheck-client certificate and key on disk
[certs] Using existing apiserver-etcd-client certificate and key on disk
[certs] Using the existing "sa" key
[kubeconfig] Using kubeconfig folder "/etc/kubernetes"
[kubeconfig] Using existing kubeconfig file: "/etc/kubernetes/admin.conf"
[kubeconfig] Using existing kubeconfig file: "/etc/kubernetes/kubelet.conf"
```

Copy the mkdir and chown commands from the top and execute them.

**mkdir -p \$HOME/.kube**

**sudo cp -i /etc/kubernetes/admin.conf \$HOME/.kube/config**

**sudo chown \$(id -u):\$(id -g) \$HOME/.kube/config**

Add a common networking plugin called flannel as mentioned in the code.

**kubectl apply -f**

**<https://raw.githubusercontent.com/coreos/flannel/master/Documentation/kube-flannel.yml>**

```
ubuntu@ip-172-31-81-58:~$ kubectl apply -f https://raw.githubusercontent.com/coreos/flannel/master/Documentation/kube-flannel.yml
namespace/kube-flannel created
clusterrole.rbac.authorization.k8s.io/flannel created
clusterrolebinding.rbac.authorization.k8s.io/flannel created
serviceaccount/flannel created
configmap/kube-flannel-cfg created
daemonset.apps/kube-flannel-ds created
ubuntu@ip-172-31-81-58:~$
```

Step 7: Now that the cluster is up and running, we can deploy our nginx server on this cluster. Apply this deployment file using this command to create a deployment

**kubectl apply -f <https://k8s.io/examples/application/deployment.yaml>**

```
daemonset.apps/kube-flannel-ds created
ubuntu@ip-172-31-81-58:~$ kubectl apply -f https://k8s.io/examples/application/deployment.yaml
deployment.apps/nginx-deployment created
ubuntu@ip-172-31-81-58:~$
```

## kubectl get pods

```
ubuntu@ip-172-31-81-58:~$ kubectl get pods
NAME                                READY   STATUS    RESTARTS   AGE
nginx-deployment-cbdccf466-blrxb    0/1     Pending   0           24s
nginx-deployment-cbdccf466-nj5cm    0/1     Pending   0           24s
ubuntu@ip-172-31-81-58:~$ |
```

POD\_NAME=\$(kubectl get pods -l app=nginx -o

jsonpath="{.items[0].metadata.name}")

kubectl port-forward \$POD\_NAME 8080:80

```
ubuntu@ip-172-31-81-58:~$ POD_NAME=$(kubectl get pods -l app=nginx -o jsonpath="{.items[0].metadata.name}")
ubuntu@ip-172-31-81-58:~$ kubectl port-forward $POD_NAME 8080:80
error: unable to forward port because pod is not running. Current status=Pending
ubuntu@ip-172-31-81-58:~$ |
```

## kubectl taint nodes --all

node-role.kubernetes.io/control-plane-node/ip-172-31-20-171 untainted

## kubectl get nodes

```
ubuntu@ip-172-31-81-58:~$ kubectl taint nodes --all node-role.kubernetes.io/control-plane-
node/ip-172-31-81-58 untainted
ubuntu@ip-172-31-81-58:~$ kubectl get nodes
NAME                STATUS    ROLES    AGE   VERSION
ip-172-31-81-58     Ready    control-plane   6m4s   v1.31.1
ubuntu@ip-172-31-81-58:~$ |
```

## kubectl get pods

```
ubuntu@ip-172-31-81-58:~$ kubectl get pods
NAME                                READY   STATUS             RESTARTS   AGE
nginx-deployment-cbdccf466-blrxb    0/1     ContainerCreating   0           3m47s
nginx-deployment-cbdccf466-nj5cm    0/1     ContainerCreating   0           3m47s
ubuntu@ip-172-31-81-58:~$ |
```

POD\_NAME=\$(kubectl get pods -l app=nginx -o

jsonpath="{.items[0].metadata.name}")

kubectl port-forward \$POD\_NAME 8080:80

```
ubuntu@ip-172-31-20-171:~$ POD_NAME=$(kubectl get pods -l app=nginx -o jsonpath="{.items[0].metadata.name}")
kubectl port-forward $POD_NAME 8080:80
Forwarding from 127.0.0.1:8080 -> 80
Forwarding from [::]:8080 -> 80
Handling connection for 8080
```

## Step 8: Verify your deployment

Open up a new terminal and ssh to your EC2 instance.

Then, use this curl command to check if the Nginx server is running.

curl --head http://127.0.0.1:8080



```
PS C:\Users\bhush\one drive 2\OneDrive\Desktop\New folder (4)> ssh -i "Master_Ec2_Key.pem" ubuntu@ec2-54-196-129-215.compute-1.amazonaws.com
Welcome to Ubuntu 24.04 LTS (GNU/Linux 6.8.0-1012-aws x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Sun Sep 15 07:58:53 UTC 2024

System load:  0.15          Processes:      152
Usage of /:   55.3% of 6.71GB Users logged in: 1
Memory usage: 20%          IPv4 address for enx0: 172.31.20.171
Swap usage:   0%

 * Ubuntu Pro delivers the most comprehensive open source security and
   compliance features.

https://ubuntu.com/aws/pro

Expanded Security Maintenance for Applications is not enabled.

132 updates can be applied immediately.
38 of these updates are standard security updates.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status
```

```
ubuntu@ip-172-31-20-171:~$ curl --head http://127.0.0.1:8080
HTTP/1.1 200 OK
Server: nginx/1.14.2
Date: Sun, 15 Sep 2024 07:59:03 GMT
Content-Type: text/html
Content-Length: 612
Last-Modified: Tue, 04 Dec 2018 14:44:49 GMT
Connection: keep-alive
ETag: "5c0692e1-264"
Accept-Ranges: bytes
```

If the response is 200 OK and you can see the Nginx server name, your deployment was successful.

We have successfully deployed our Nginx server on our EC2 instance.

