



IBM Developer  
SKILLS NETWORK

# Winning Space Race with Data Science

Mohamed Mostafa Ramadan Mohamed  
May 30, 2022



# Outline

---

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix

# Executive Summary

---

- Summary of methodologies
  - Data collection
  - Data wrangling
  - EDA with data visualization
  - EDA with SQL
  - Building an interactive map with Folium
  - Building a Dashboard with Plotly Dash
  - Predictive analysis (Classification)
- Summary of all results
  - Exploratory data analysis results
  - Interactive analytics demo in screenshots
  - Predictive analysis results

# Introduction

---

- Project background and context

The The era of commercial space has arrived, and there are several companies that are making space travel affordable for everyone. Perhaps the most successful of them is *SpaceX*, and one of the reasons is that their rocket launch is relatively inexpensive.

*SpaceX* advertises *Falcon 9* rocket launches on its website, with a cost of 62 million dollars; other providers cost upward of 165 million dollars each, much of the savings is because *SpaceX* can reuse the first stage.

Therefore, we will predict if the *Falcon 9* first stage will land successfully. If we can determine if the first stage will land, we can determine the cost of a launch. This information can be used if an alternate company wants to bid against *SpaceX* for a rocket launch.

- Problems you want to find answers

- Correlations between each rocket variables and successful landing rate
- Conditions to get the best results and ensure the best successful landing rate



Section 1

# Methodology

# Methodology

---

## Executive Summary


- Data collection methodology:
  - SpaceX API & Web Scraping [List of Falcon 9 and Falcon Heavy launches - Wikipedia](#)
- Perform data wrangling
  - Convert outcomes into Training Labels with the booster successfully/unsuccessful landed
- Perform exploratory data analysis (EDA) using visualization and SQL
- Perform interactive visual analytics using Folium and Plotly Dash
- Perform predictive analysis using classification models
  - Find best Hyperparameter for SVM, Classification Trees and Logistic Regression




# Data Collection

- The data collection process includes a combination of API requests from the SpaceX API and web scraping data from a table in the Wikipedia page of SpaceX, *Falcon 9 and Falcon Heavy Launches Records*.
  - SpaceX API Data Columns: FlightNumber, Date, BoosterVersion, PayloadMass, Orbit, LaunchSite, Outcome, Flights, GridFins, Reused, Legs, LandingPad, Block, ReusedCount, Serial, Longitude, Latitude
  - Wikipedia Web Scrape Data Columns: Flight No., Launch site, Payload, PayloadMass, Orbit, Customer, Launch outcome, Version Booster, Booster landing, Date, Time.

## SpaceX API

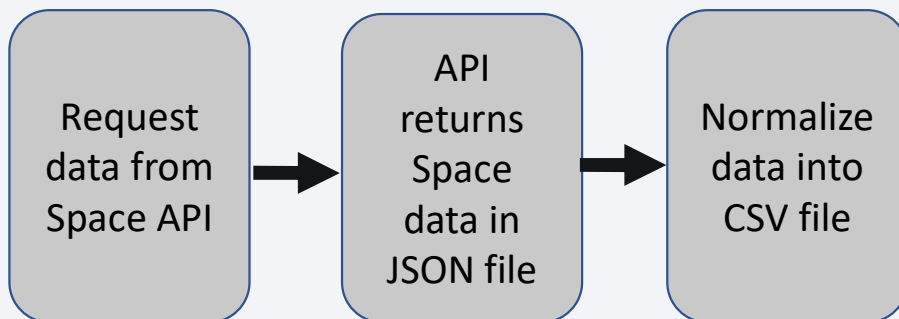

## Web Scraping

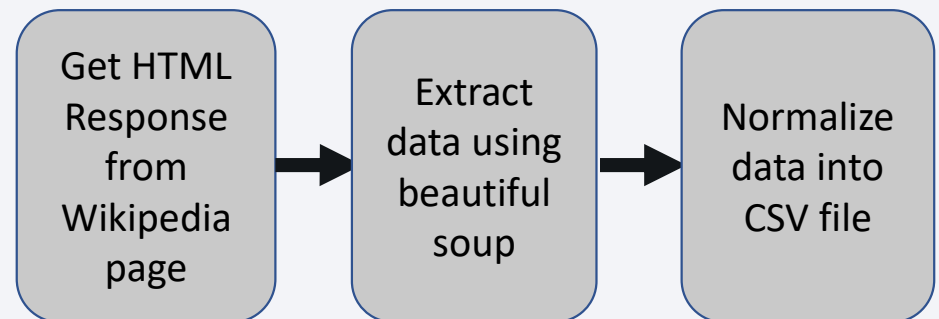

# Data Collection – SpaceX API

## 1. Requesting rockets launch data from SpaceX API

```
In [9]: static_json_url='https://cf-courses-data.s3.us.cloud-object-storage.appdon

We should see that the request was successfull with the 200 status response code

In [10]: response.status_code

Out[10]: 200
```

## 2. Converting Response to a json file

```
data = pd.json_normalize(response.json())
```

## 3. Using customer functions to clean data

```
getBoosterVersion(data)    getLaunchSite(data)
getPayloadData(data)       getCoreData(data)
```

## 4. Combining the columns into a dictionary to create data frame

```
launch_dict = {'FlightNumber': list(data['flight_number']),
               'Date': list(data['date']),
               'BoosterVersion':BoosterVersion,
               'PayloadMass':PayloadMass,
               'Orbit':Orbit,
               'LaunchSite':LaunchSite,
               'Outcome':Outcome,
               'Flights':Flights,
               'GridFins':GridFins,
               'Reused':Reused,
               'Legs':Legs,
               'LandingPad':LandingPad,
               'Block':Block,
               'ReusedCount':ReusedCount,
               'Serial':Serial,
               'Longitude': Longitude,
               'Latitude': Latitude}

launch_df = pd.DataFrame.from_dict(launch_dict)
```

## 5. Filtering dataframe and exporting to a csv

```
data_falcon9 = launch_df[launch_df['BoosterVersion'] == 'Falcon 9']

data_falcon9.to_csv('dataset_part\1.csv', index=False)
```

- [Applied Data Science Capstone SPACE X/Data Collection SpaceX API.ipynb at master · mohkipic/Applied Data Science Capstone SPACE X \(github.com\)](#)



# Data Collection - Scraping

## 1. Getting response from HTML

```
html_data = requests.get(static_url).text
```

## 2. Creating a BeautifulSoup object

```
soup = BeautifulSoup(html_data, 'html.parser')
```

## 3. Finding all tables and assigning the result to a list

```
html_tables = soup.find_all('table')
```

## 4. Extracting column name one by one

```
column_names = []

for row in first_launch_table.find_all('th'):
    name = extract_column_from_header(row)
    if (name != None and len(name) > 0):
        column_names.append(name)
```

## 5. Creating an empty dictionary with keys

```
launch_dict = dict.fromkeys(column_names)

# Remove an irrelevant column
del launch_dict['Date and time ( )']

# Let's initial the launch_dict with empty lists
launch_dict['Flight No.'] = []
launch_dict['Launch site'] = []
launch_dict['Payload'] = []
launch_dict['Payload mass'] = []
launch_dict['Orbit'] = []
launch_dict['Customer'] = []
launch_dict['Launch outcome'] = []

# Added some new columns
launch_dict['Version Booster'] = []
launch_dict['Booster landing'] = []
launch_dict['Date'] = []
launch_dict['Time'] = []
```

## 6. Filling up the launch\_dict with launch records

*(Too long to put in here, so please refer to the notebook)*

## 7. Creating a Dataframe and exporting it to a CSV

```
df = pd.DataFrame(launch_dict)

df.to_csv('spacex_web_scraped.csv', index=False)
```

- [Applied Data Science Capstone SPACE X/Data Collection Scraping.ipynb at master · mohkipic/Applied Data Science Capstone SPACE X \(github.com\)](https://github.com/mohkipic/Applied-Data-Science-Capstone-SPACE-X/blob/master/Data%20Collection%20Scraping.ipynb)

# Data Wrangling

---

- There are several cases in which the booster failed to successfully land on the dataset, and sometimes it attempted to land but failed because of accident.
  - True Ocean: the mission result has successfully landed in a specific area of the ocean
  - False Ocean: the mission result has not successfully landed in a specific area of the ocean
  - True RTLS: the mission result successfully landed on the ground pad
  - False RTLS: the mission result has not successfully landed on the ground pad
  - True ASDS: the mission result has successfully landed on the drone ship
  - False ASDS: the mission result has not landed on the drone ship
- Converting these results into training labels:
  - 1 = successful / 0 = failure
- [Applied Data Science Capstone SPACE X/Data Wrangling.ipynb at master · mohkipic/Applied Data Science Capstone SPACE X \(github.com\)](#)

# Data Wrangling

1. Calculating the number of launches at each site

```
df['LaunchSite'].value_counts()
```

2. Calculating the number and occurrence of each orbit

```
df.Orbit.value_counts()
```

3. Calculating the number and occurrence of mission outcome per orbit type

```
landing_outcomes = df.Outcome.value_counts()  
landing_outcomes
```

4. Creating a landing outcome label from outcome column

```
landing_class = []  
for outcome in df.Outcome:  
    if outcome in bad_outcomes:  
        landing_class.append(0)  
    else:  
        landing_class.append(1)  
  
df['Class'] = landing_class  
df[['Class']].head(8)
```

5. Combining the columns into a dictionary to create data frame

```
df["Class"].mean()
```

```
0.6666666666666666
```

6. Filtering dataframe and exporting to a csv

```
df.to_csv("dataset_part\_2.csv", index=False)
```

- [Applied Data Science Capstone SPACE X/Data Collection SpaceX API.ipynb at master · mohkipic/Applied Data Science Capstone SPACE X \(github.com\)](#)

# EDA with Data Visualization

---

- Scatter chart:
  - *Flight Number vs. Launch Site*
  - *Payload vs. Launch Site*
  - *Flight Number vs. Orbit Type*
  - *Payload vs. Orbit Type*
  - A scatter plot shows how much one variable is affected by another. The relationship between two variables is called a correlation. This plot is generally composed of large data bodies.
- Bar chart:
  - *Orbit Type vs. Success Rate*
  - A Bar chart makes it easy to compare datasets between multiple groups at a glance. One axis represents a category and the other axis represents a discrete value. The purpose of this chart is to indicate the relationship between the two axes.
- Line chart:
  - *Year vs. Success Rate*
  - A Line chart shows data variables and trends very clearly and helps predict the results of data that has not yet been recorded.
- [Applied Data Science Capstone SPACE X/EDA with Data Visualization.ipynb at master · mohkipic/Applied Data Science Capstone SPACE X \(github.com\)](https://github.com/mohkipic/Applied-Data-Science-Capstone-SPACE-X/blob/master/EDA%20with%20Data%20Visualization.ipynb)

# EDA with SQL

---

- Loading the dataset into the corresponding table in a Db2 database, and executing SQL queries to answer following questions:
  - Displaying the names of the unique launch sites in the space mission
  - Displaying 5 records where launch sites begin with the string 'CCA'
  - Displaying the total payload mass carried by boosters launched by NASA (CRS)
  - Displaying average payload mass carried by booster version F9 v1.1
  - Listing the date when the first successful landing outcome in ground pad was achieved
  - Listing the names of the boosters which have success in drone ship and have payload mass greater than 4000 but less than 6000
    - Listing the total number of successful and failure mission outcomes
    - Listing the names of the booster\_versions which have carried the maximum payload mass
    - Listing the failed landing\_outcomes in drone ship, their booster versions, and launch site names for in year 2015
    - Ranking the count of landing outcomes (such as Failure (drone ship) or Success (ground pad)) between the date 2010-06-04 and 2017-03-20, in descending order
- [Applied Data Science Capstone SPACE X/EDA with SQL.ipynb at master · mohkipic/Applied Data Science Capstone SPACE X \(github.com\)](https://github.com/mohkipic/Applied-Data-Science-Capstone-SPACE-X-EDA-with-SQL.ipynb)

# Build an Interactive Map with Folium

---

- Objects created and added to a folium map:
  - Markers that show all launch sites on a map
  - Markers that show the success/failed launches for each site on the map
  - Lines that show the distances between a launch site to its proximities
- By adding these objects, following geographical patterns about launch sites are found:
  - Are launch sites in close proximity to railways? Yes
  - Are launch sites in close proximity to highways? Yes
  - Are launch sites in close proximity to coastline? Yes
  - Do launch sites keep certain distance away from cities? Yes
- [Applied Data Science Capstone SPACE X/Interactive Map with Folium.ipynb at master · mohkipic/Applied Data Science Capstone SPACE X \(github.com\) /](#)  
[Applied Data Science Capstone SPACE X/Interactive Map with Folium - PDF.pdf at master · mohkipic/Applied Data Science Capstone SPACE X \(github.com\)](#)




# Build a Dashboard with Plotly Dash

---

- The dashboard application contains a pie chart and a scatter point chart.
  - *Pie chart*
    - For showing total success launches by sites
    - This chart can be selected to indicate a successful landing distribution across all launch sites or to indicate the success rate of individual launch sites.
  - *Scatter chart*
    - For showing the relationship between Outcomes and Payload mass (Kg) by different boosters
    - Has 2 inputs: All sites/individual site & Payload mass on a slider between 0 and 10000 kg
    - This chart helps determine how success depends on the launch point, payload mass, and booster version categories.
- [Applied Data Science Capstone SPACE X/Dashboard with Plotly Dash.py at master · mohkpic/Applied Data Science Capstone SPACE X \(github.com\)](https://github.com/mohkpic/Applied-Data-Science-Capstone-SPACE-X-Dashboard-with-Plotly-Dash.py) (Code Only)

# Predictive Analysis (Classification)


- Perform exploratory Data Analysis and determine Training Labels
  - Create a column for the class
  - Standardize the data
  - Split into training data and test data
- Find best Hyperparameter for SVM, Classification Trees and Logistic Regression
  - Find the method performs best using test data

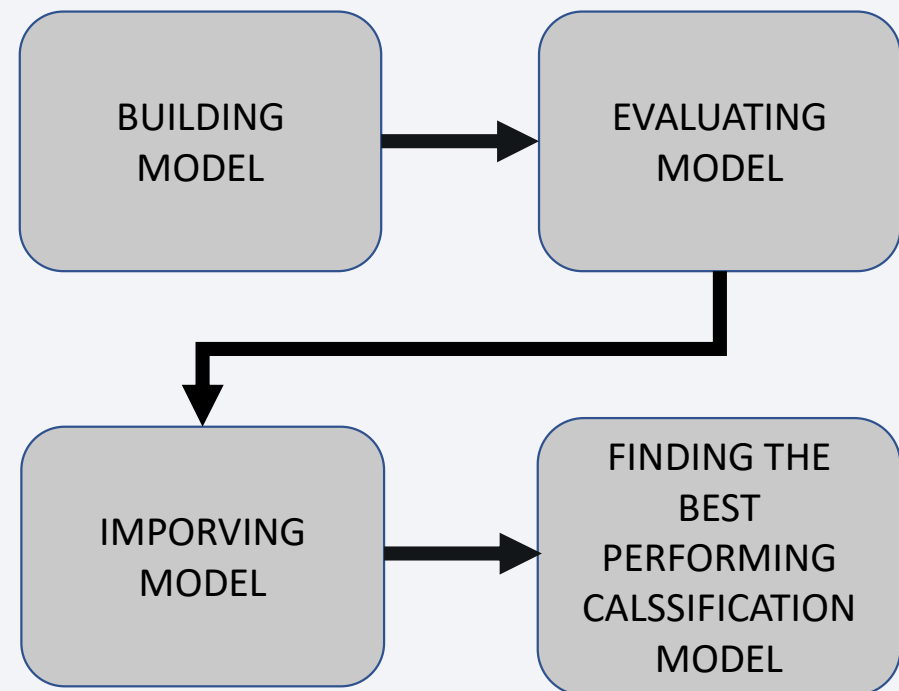

- [Applied Data Science Capstone SPACE X/Predictive Analysis Classification.ipynb at master · mohkipic/Applied Data Science Capstone SPACE X \(github.com\)](https://github.com/mohkipic/Applied-Data-Science-Capstone-SPACE-X/blob/master/Predictive-Analysis-Classification.ipynb)

# Results

- The screenshot is a preview of the Dashboard with Plotly Dash.
- The results of EDA with visualization, EDA with SQL, Interactive Map with Folium, and Interactive Dashboard will be shown in the next slides.
- Comparing the accuracy of the three methods, return the same accuracy of about 83% for test data and one with 77%.

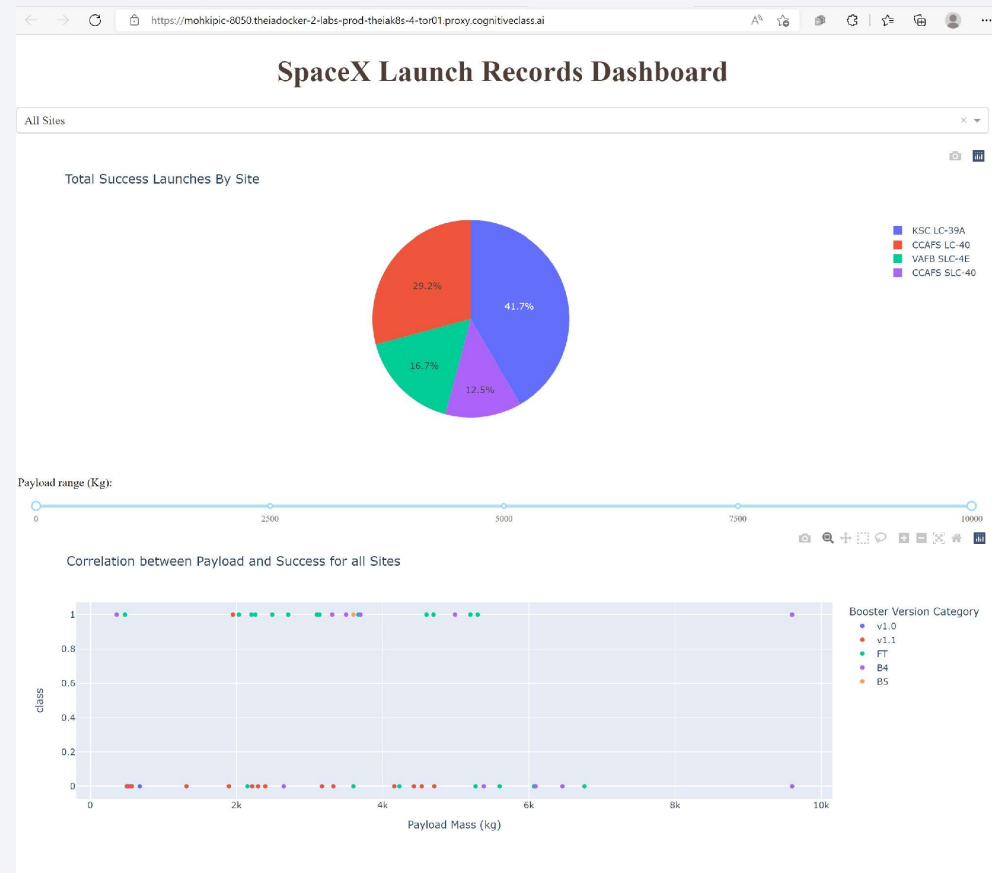






Section 2

# Insights drawn from EDA


# Flight Number vs. Launch Site

- Class 0 (blue) represents unsuccessful launch, and Class 1 (orange) represents successful launch.
- This figure shows that **the success rate increased as the number of flights increased.**
- As the success rate has increased considerably since the 20th flight, this point seems to be a big breakthrough.

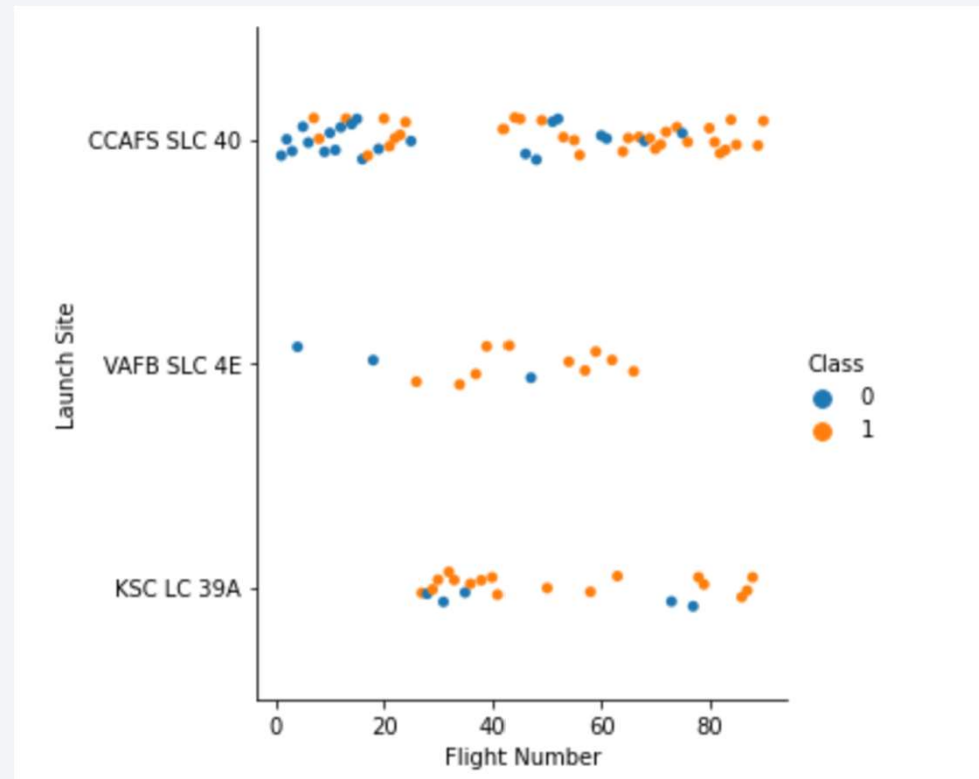

# Payload vs. Launch Site


- Class 0 (blue) represents unsuccessful launch, and Class 1 (orange) represents successful launch.
- At first glance, the larger pay load mass, the higher the rocket's success rate, but it seems difficult to make decisions based on this figure because **no clear pattern can be found between successful launch and Pay Load Mass**. Show a scatter plot of Payload vs.

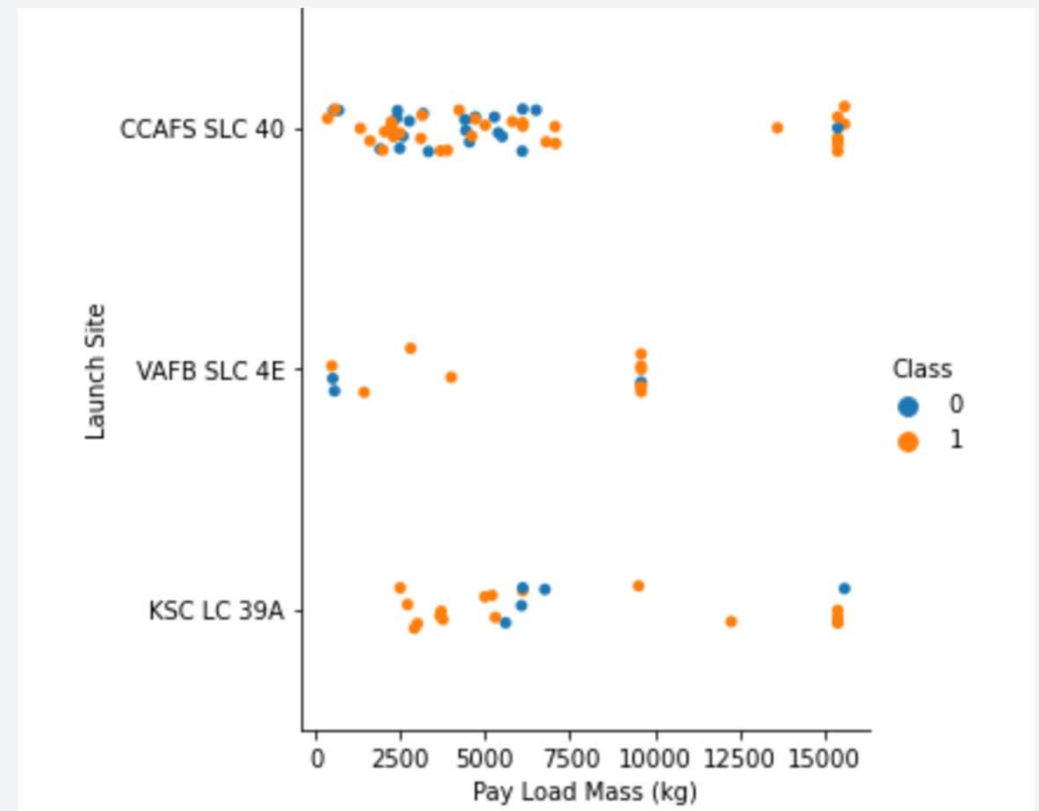




# Success Rate vs. Orbit Type

- Orbit types **SSO**, **HEO**, **GEO**, and **ES-L1** have the highest success rates (100%).
- On the other hand, the success rate of orbit type **GTO** is only 50%, and it is the **lowest** except for type **SO**, which recorded failure in a single attempt.

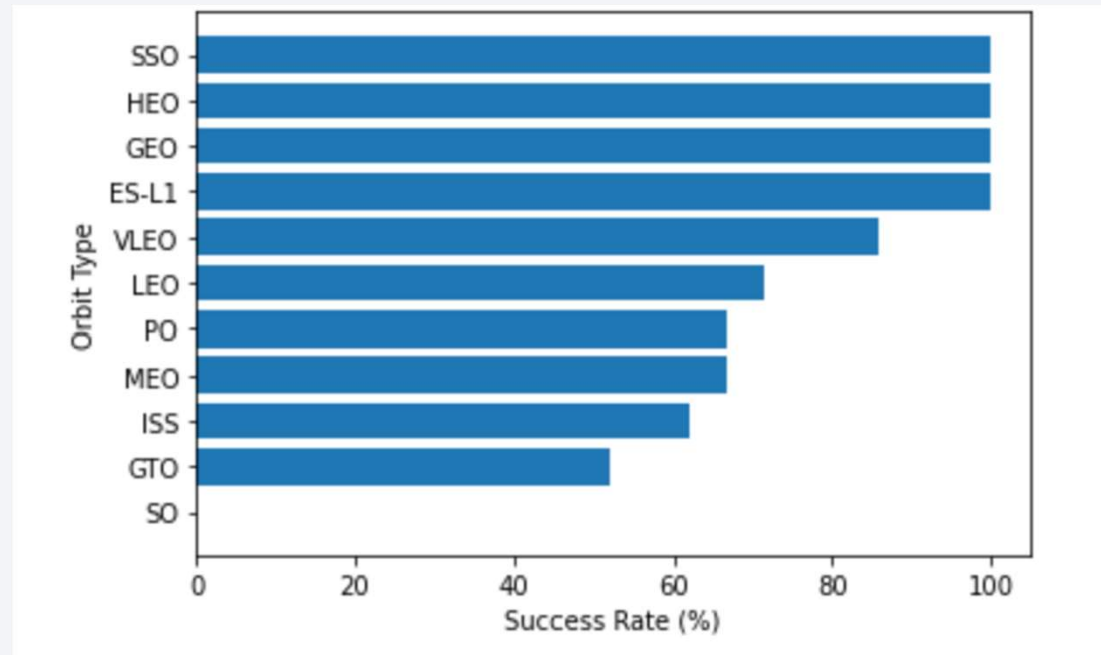


# Flight Number vs. Orbit Type

- Class 0 (blue) represents unsuccessful launch, and Class 1 (orange) represents successful launch.
- In most cases, the launch outcome seems to be correlated with the flight number.
- On the other hand, in **GTO** orbit, there seems to be **no** relationship between flight numbers and success rate.
- SpaceX starts with LEO with a moderate success rate, and it seems that VLEO, which has a high success rate, is used the most in recent launches.

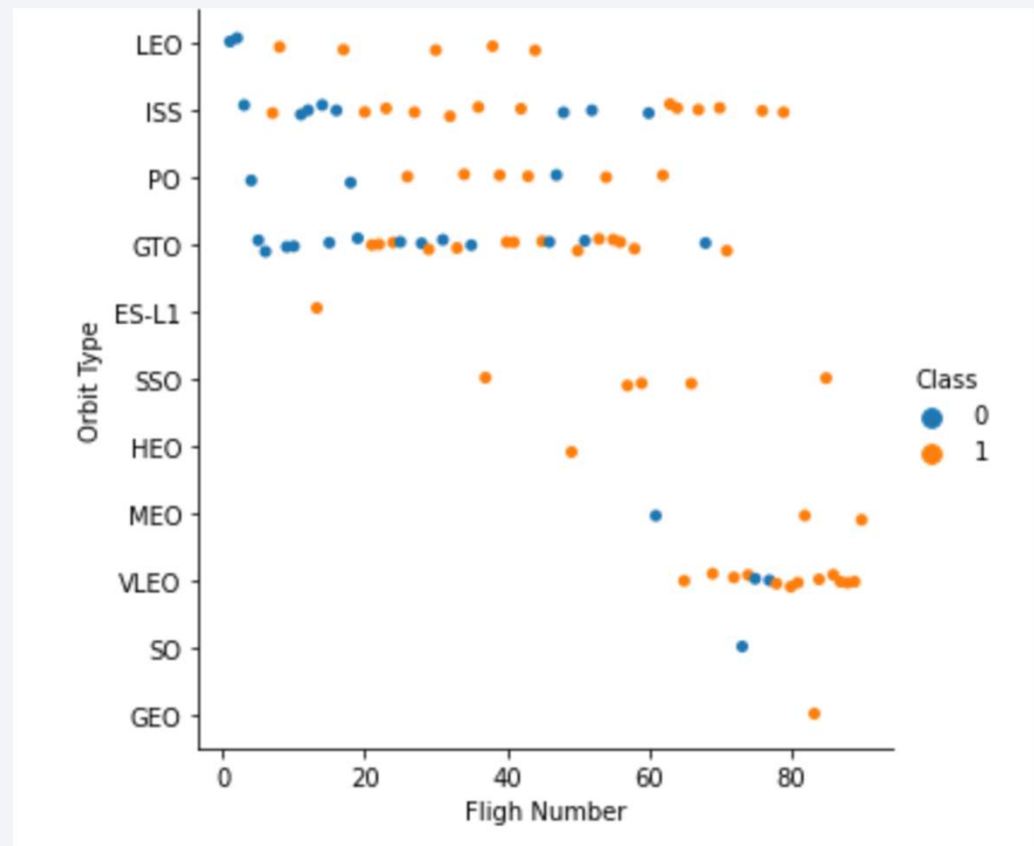

# Payload vs. Orbit Type


- Class 0 (blue) represents unsuccessful launch, and Class 1 (orange) represents successful launch.
- With heavy payloads the successful landing or positive landing rate are more for LEO and ISS.
- However, in the case of GTO, it is hard to distinguish between the positive landing rate and the negative landing because they are all gathered together.

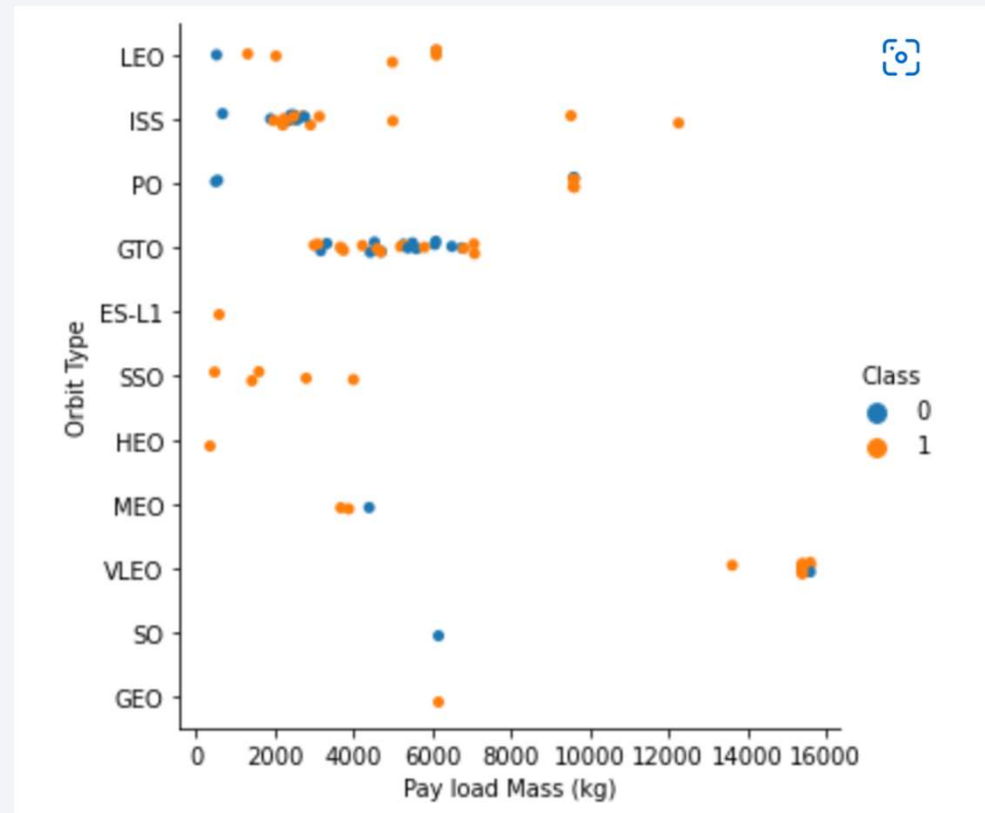

# Launch Success Yearly Trend

---

- Since 2013, the success rate has continued to **increase** until 2017.
- The rate decreased slightly in 2018.
- Recently, it has shown a success rate of about 80%.

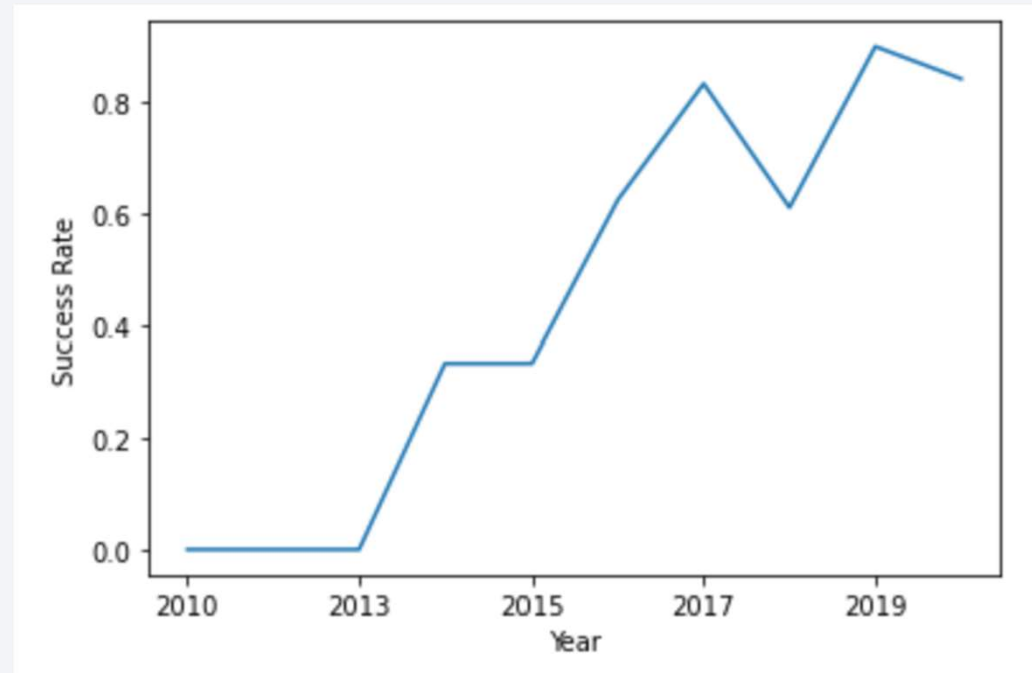

# All Launch Site Names

- Query

```
%%sql
SELECT DISTINCT LAUNCH_SITE
FROM SPACE_SQL
```

- Result

launch_site
CCAFS LC-40
CCAFS SLC-40
KSC LC-39A
VAFB SLC-4E

- When the SQL DISTINCT clause is used in the query, only unique values are displayed in the Launch\_Site column from the SpaceX table.
- There are four unique launch sites: CCAFS LC-40, CCAFS SLC-40, KSC LC-39A, VAFB SLC-4E

# Launch Site Names Begin with 'CCA'

- Query

```
%%sql
SELECT * FROM SPACE_SQL
WHERE LAUNCH_SITE LIKE 'CCA%'
LIMIT 5
```

- Result

- Only five records of the SpaceX table were displayed using LIMIT 5 clause in the query.
- Using the LIKE operator and the percent sign (%) together, the Launch\_Site name starting with CAA could be called.

DATE	time_utc	booster_version	launch_site	payload	payload_mass_kg	orbit	customer	mission_outcome	landing_outcome
2010-06-04	18:45:00	F9 v1.0 B0003	CCAFS LC-40	Dragon Spacecraft Qualification Unit	0	LEO	SpaceX	Success	Failure (parachute)
2010-12-08	15:43:00	F9 v1.0 B0004	CCAFS LC-40	Dragon demo flight C1, two CubeSats, barrel of Brouere cheese	0	LEO (ISS)	NASA (COTS) NRO	Success	Failure (parachute)
2012-05-22	07:44:00	F9 v1.0 B0005	CCAFS LC-40	Dragon demo flight C2	525	LEO (ISS)	NASA (COTS)	Success	No attempt
2012-10-08	00:35:00	F9 v1.0 B0006	CCAFS LC-40	SpaceX CRS-1	500	LEO (ISS)	NASA (CRS)	Success	No attempt
2013-03-01	15:10:00	F9 v1.0 B0007	CCAFS LC-40	SpaceX CRS-2	677	LEO (ISS)	NASA (CRS)	Success	No attempt



# Total Payload Mass

---

- Query

```
%%sql
SELECT SUM(PAYLOAD_MASS__KG_) AS total_payload_mass_kg
FROM SPACE_SQL
WHERE CUSTOMER = 'NASA (CRS)'
```

- Result

total_payload_mass_kg
-----------------------

45596
-------

- Using the SUM( ) function to calculate the sum of column PAYLOAD\_MASS\_\_KG\_.
- In the WHERE clause, filter the dataset to perform calculations only if Customer is NASA (CRS).

# Average Payload Mass by F9 v1.1

---

- Query

```
%%sql
SELECT AVG(PAYLOAD_MASS__KG_) AS avg_payload_mass_kg
FROM SPACE_SQL
WHERE BOOSTER_VERSION = 'F9 v1.1'
```

- Result

avg_payload_mass_kg
---------------------

2928
------

- Using the AVG() function to calculate the average value of column PAYLOAD\_MASS\_\_KG\_.
- In the WHERE clause, filter the dataset to perform calculations only if Booster\_version is F9 v1.1.

# First Successful Ground Landing Date

---

- Query

```
%%sql
SELECT MIN(DATE) AS first_successful_landing_date
FROM SPACE_SQL
WHERE LANDING__OUTCOME = 'Success (ground pad)'
```

- Result

first_successful_landing_date
-------------------------------

2015-12-22
------------

- Using the MIN( ) function to find out the earliest date in the column DATE.
- In the WHERE clause, filter the dataset to perform a search only if Landing\_\_outcome is Success (ground pad).

## Successful Drone Ship Landing with Payload between 4000 and 6000

- Query

```
%%sql
SELECT BOOSTER_VERSION
FROM SPACE_SQL
WHERE LANDING__OUTCOME = 'Success (drone ship)'
      AND (PAYLOAD_MASS__KG_ BETWEEN 4000 AND 6000)
```

- Result

booster_version
F9 FT B1022
F9 FT B1026
F9 FT B1021.2
F9 FT B1031.2

- In the WHERE clause, filter the dataset to perform a search if Landing\_\_outcome is Success (droneship).
  - Using the AND operator to display a record if additional condition PAYLOAD\_MASS\_\_KG\_ is between 4000 and 6000.

# Total Number of Successful and Failure Mission Outcomes

- Query

```
%%sql
SELECT MISSION_OUTCOME, COUNT(*) AS total_number
FROM SPACE_SQL
GROUP BY MISSION_OUTCOME
```

- Result

mission_outcome	total_number
Failure (in flight)	1
Success	99
Success (payload status unclear)	1

- Using the COUNT() function to calculate the total number of columns.
- Using the GROUP BY statement, groups rows that have the same values into summary rows to find the total number in each Mission\_outcome.
- According to the result, SpaceX seems to have **successfully completed nearly 99% of its missions.**

# Boosters Carried Maximum Payload

- Query

```
%%sql
SELECT DISTINCT BOOSTER_VERSION, PAYLOAD_MASS__KG_
FROM SPACE_SQL
WHERE PAYLOAD_MASS__KG_ = (
    SELECT MAX(PAYLOAD_MASS__KG_)
    FROM SPACE_SQL);
```

- Result

booster_version	payload_mass_kg_
F9 B5 B1048.4	15600
F9 B5 B1048.5	15600
F9 B5 B1049.4	15600
F9 B5 B1049.5	15600
F9 B5 B1049.7	15600
F9 B5 B1051.3	15600
F9 B5 B1051.4	15600
F9 B5 B1051.6	15600
F9 B5 B1056.4	15600
F9 B5 B1058.3	15600
F9 B5 B1060.2	15600
F9 B5 B1060.3	15600

- Using a subquery, first, find the maximum value of the payload by using MAX() function, and second, filter the dataset to perform a search if PAYLOAD\_MASS\_\_KG\_ is the maximum value of the payload.
- According to the result, version F9 B5 B10xx.x boosters could carried the maximum payload.



# 2015 Launch Records

- Query

```
%%sql
SELECT LANDING__OUTCOME, BOOSTER_VERSION, LAUNCH_SITE
FROM SPACE_SQL
WHERE LANDING__OUTCOME = 'Failure (drone ship)' AND YEAR(DATE) = '2015'
```

- Result

landing__outcome	booster_version	launch_site
Failure (drone ship)	F9 v1.1 B1012	CCAFS LC-40
Failure (drone ship)	F9 v1.1 B1015	CCAFS LC-40

- In the WHERE clause, filter the dataset to perform a search if Landing\_\_outcome is Failure (drone ship).
  - Using the AND operator to display a record if additional condition YEAR is 2015.
- In 2015, there were two landing failures on drone ships.

# Rank Landing Outcomes Between 2010-06-04 and 2017-03-20

- Query

```
%%sql
SELECT LANDING__OUTCOME, COUNT(LANDING__OUTCOME) AS total_number
FROM SPACE_SQL
WHERE DATE BETWEEN '2010-06-04' AND '2017-03-20'
GROUP BY LANDING__OUTCOME
ORDER BY total_number DESC
```

- Result

landing_outcome	total_number
No attempt	10
Failure (drone ship)	5
Success (drone ship)	5
Controlled (ocean)	3
Success (ground pad)	3
Failure (parachute)	2
Uncontrolled (ocean)	2
Precluded (drone ship)	1


- In the WHERE clause, filter the dataset to perform a search if the date is between 2010-06-04 and 2017-03-20.
- Using the ORDER BY keyword to sort the records by total number of landing, and using DESC keyword to sort the records in descending order.
- According to the results, the number of successes and failures between 2010-06-04 and 2017-03-20 was similar.

A satellite view of Earth from space, showing the curvature of the planet and the glowing lights of cities at night. The image is used as a background for the title slide.

Section 3



# Launch Sites Proximities Analysis

# All Launch Sites' Locations

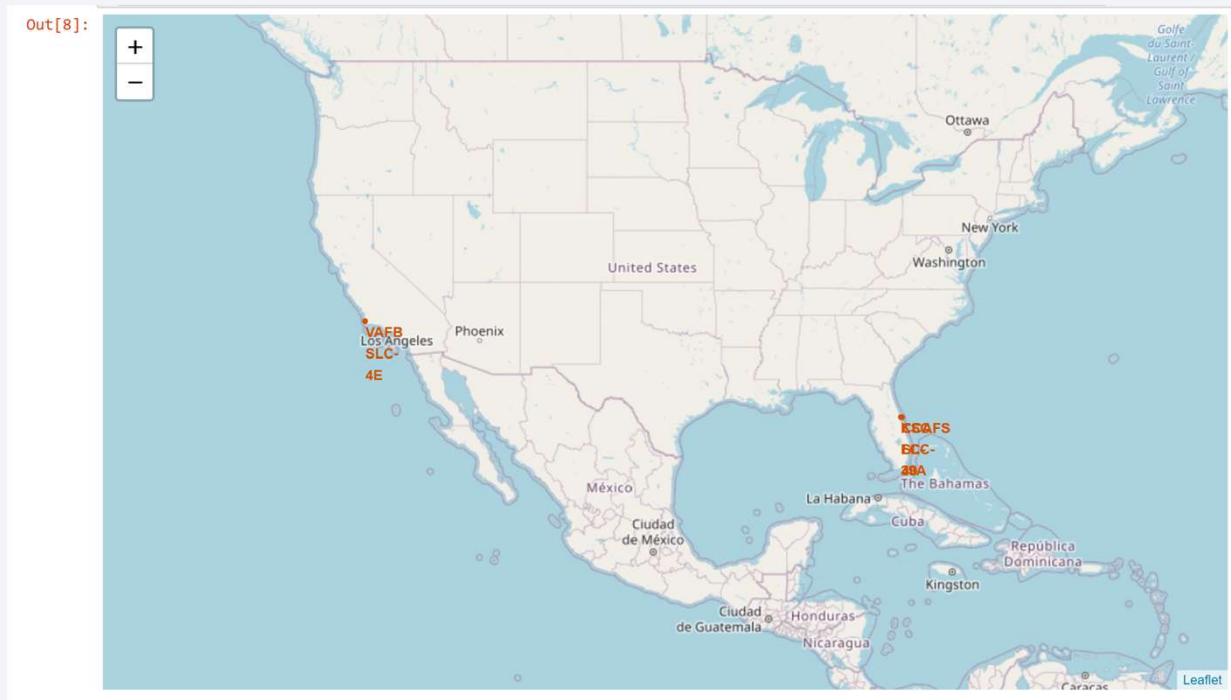

- The map shows all *SpaceX* launch sites, and the right map also shows that all launch sites are in the United States.
- As can be seen on the map, all launch sites are near the coast.


# Color-labeled Launch Outcomes

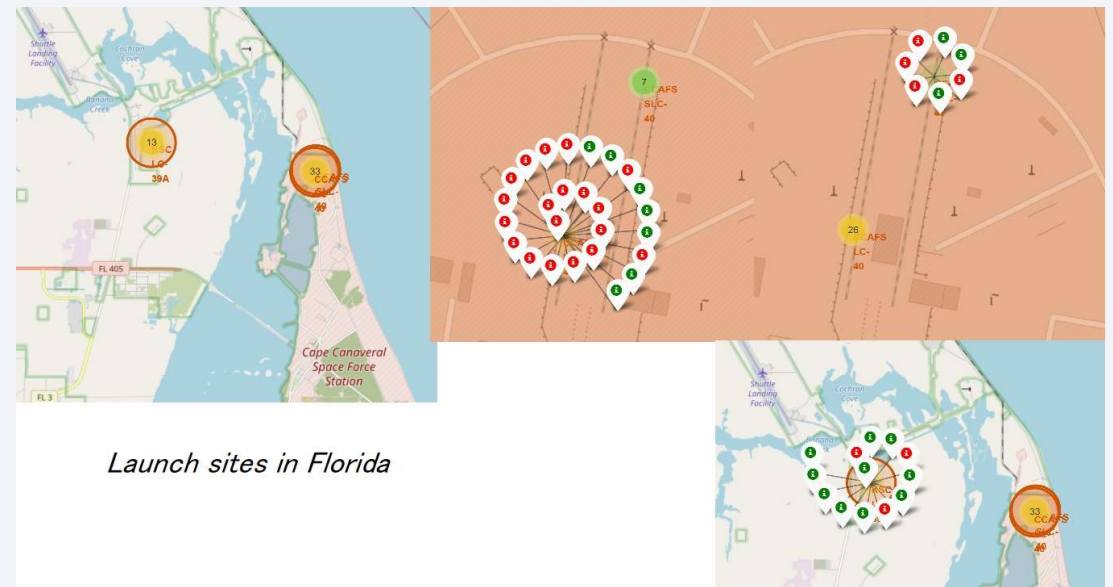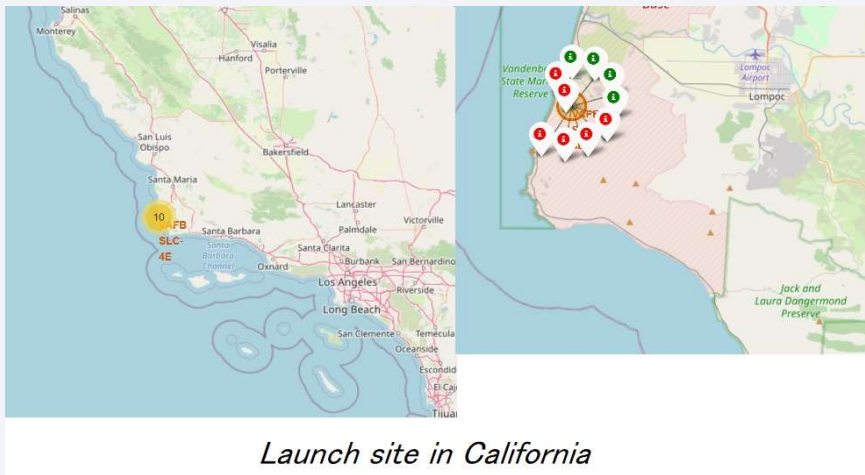

- By clicking on the marker clusters, successful landing (green) or failed landing (red) are displayed.

# Proximities of Launch Sites

- It can be found that the launch site is **close to railways and highways** for transportation of equipment or personnel and is also **close to coastline** and relatively **far from the cities** so that launch failure does not pose a threat.

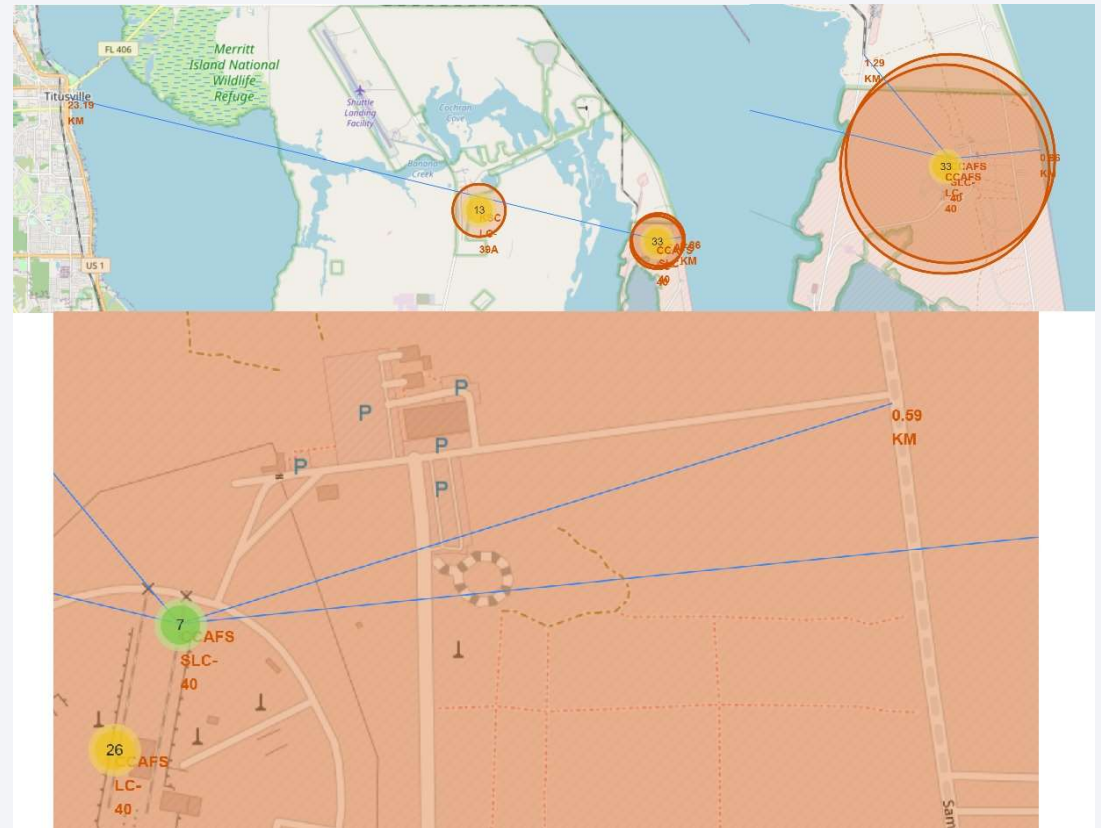





Section 4

# Build a Dashboard with Plotly Dash



# Total Success Launches By all sites

- KSLC-39A records the most launch success among all sites.
- The VAFB SLC-4E has the fewest launch success, possibly because
  - the data sample is small, or
  - because it is the only site located in California, so the launch difficulty on the west coast may be higher than on the east coast.


Total Success Launches By Site



## Launch Site with Highest Launch Success Ratio

---

- KSLC-39A has the highest success rate with 10 landing successes (76.9%) and 3 landing failures (23.1%).

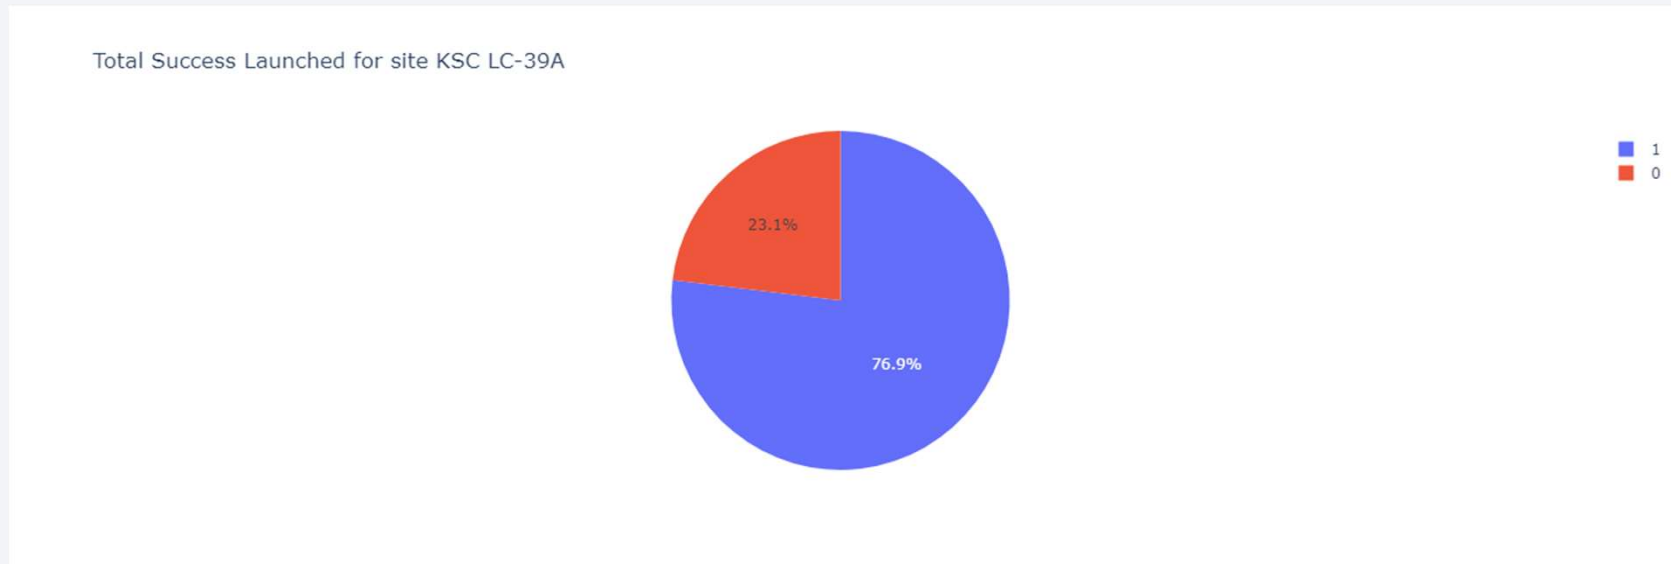

# Payload vs. Launch Outcome Scatter Plot for all sites

- These figures show that **the launch success rate (class 1) for low weighted payloads (0-5000 kg) is higher** than that of heavy weighted payloads (5000-10000 kg).






Section 5

# Predictive Analysis (Classification)

# Classification Accuracy


---

- In the test set, **the accuracy of three models** was virtually the **same** at **83.33%**, one was **77.77%**
- It should be noted that the test size was small at 18.
- Therefore, more data is needed to determine the optimal model.

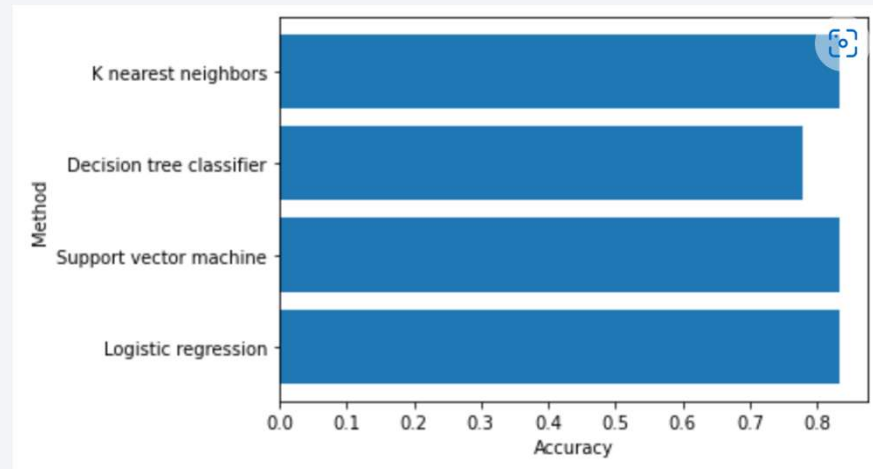

# Confusion Matrix

- The confusion matrix is the same for all models because all models performed the same for the test set.
- The models predicted 12 successful landings when the true label was successful and 3 failed landings when the true label was failure. But there were also 3 predictions that said successful landings when the true label was failure (*false positive*).
- Overall, **these models predict successful landings.**

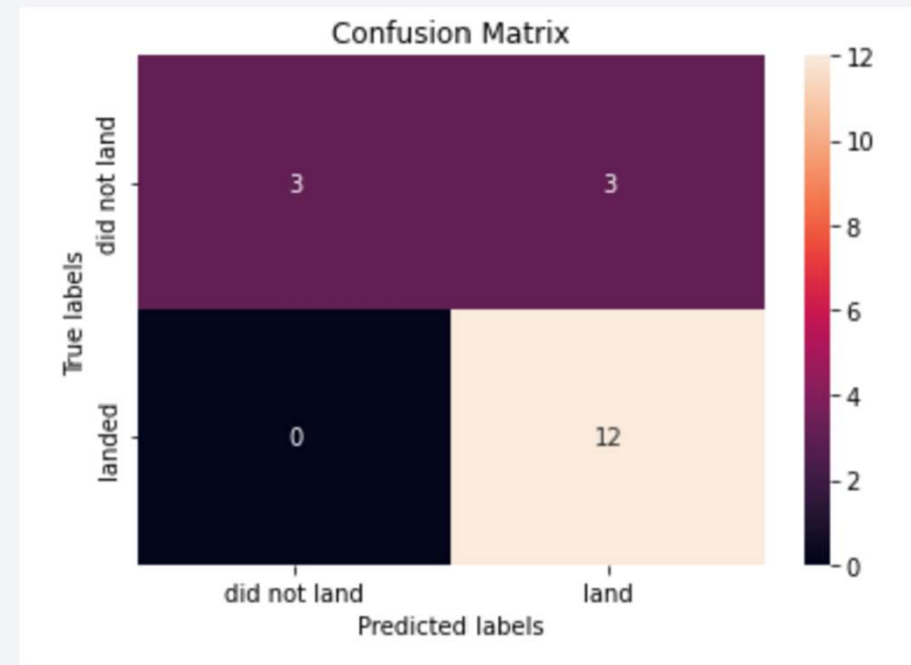

# Conclusions

---

- As the number of flights increased, the success rate increased, and recently it has exceeded 80%.
- Orbital types SSO, HEO, GEO, and ES-L1 have the highest success rate (100%).
- The launch site is close to railways, highways, and coastline, but far from cities.
- KSLC-39A has the highest number of launch successes and the highest success rate among all sites.
- The launch success rate of low weighted payloads is higher than that of heavy weighted payloads.
- In this dataset, three models have the same accuracy (83.33%), one was (77.77%), but it seems that more data is needed to determine the optimal model due to the small data size.



# Appendix

---

- [mohkipic/Applied Data Science Capstone SPACE X \(github.com\)](#)

Thank you!

