

# Cucumber Report

19 Dec 2024, 6:05:30 pm

Start : Dec 19, 6:05:24.368 pm

End : Dec 19, 6:05:30.407 pm

Duration : 6.039 s

Features


Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 3  
SKIPPED - 0


PASSED - 0  
FAILED - 3  
SKIPPED - 3

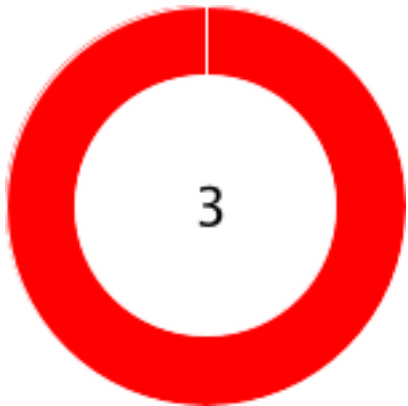


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Using IOS 1</u>	6.039 s	3	0	3	0	6	0	3	3

#	Feature Name	Scenario Name
1	<u>Using IOS 1</u>	<u>User To Test Search Bar Function</u>
2		<u>User To Test Search Bar Function</u>
3		<u>User To Test Search Bar Function</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Test1	3	0	3	0	1	0	1	0

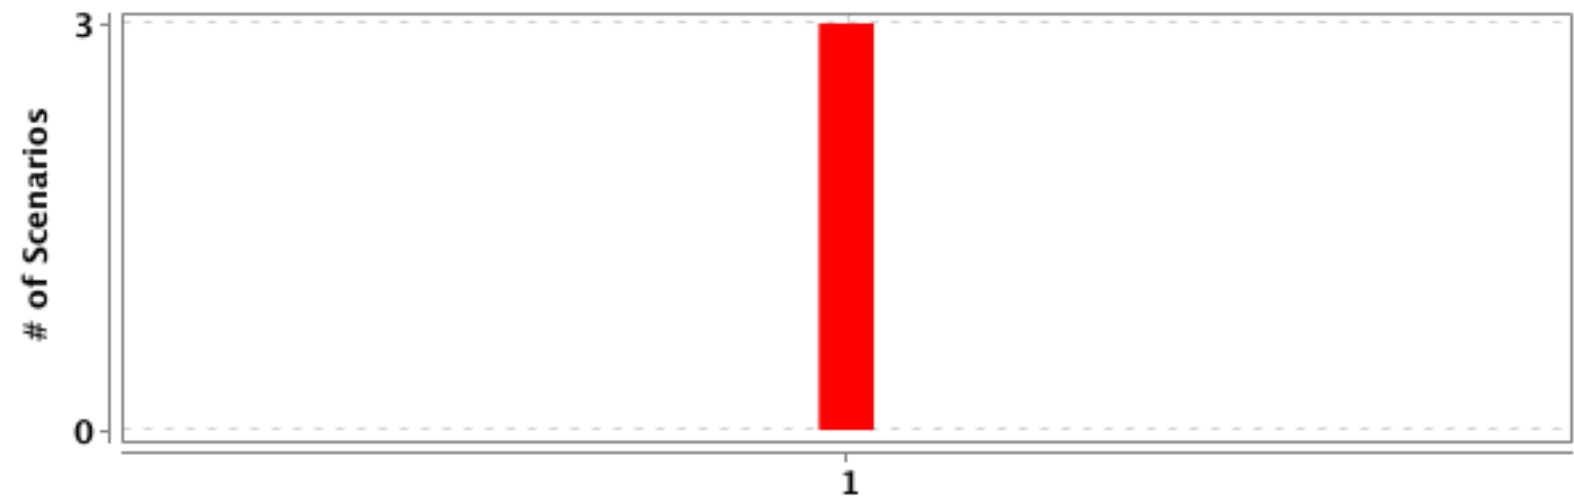

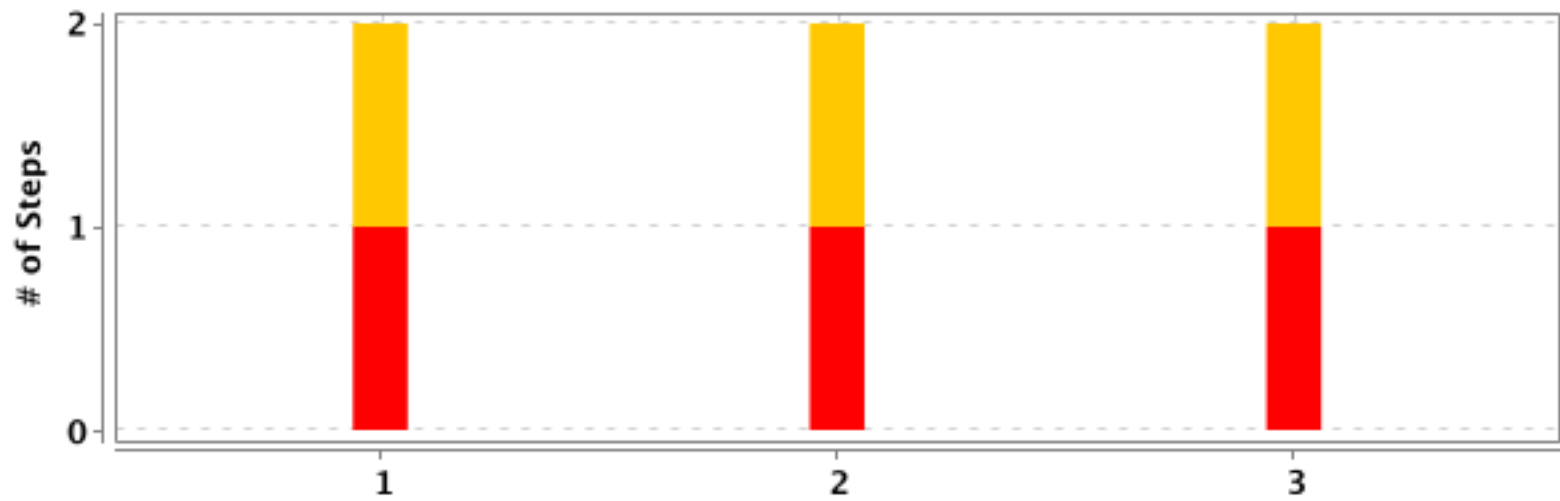

#	Feature Name	T	P	F	S	Duration
1	<u>Using IOS 1</u>	3	0	3	0	6.039 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Using IOS 1</u>	<u>User To Test Search Bar Function</u>	2	0	1	1	6.038 s
2		<u>User To Test Search Bar Function</u>	2	0	1	1	5.937 s
3		<u>User To Test Search Bar Function</u>	2	0	1	1	5.855 s

## Using IOS 1

<b>FAILED</b>	<b>DURATION - 6.039 s</b>	Scenarios Total - 3 <b>Pass - 0</b> Fail - 3 Skip - 0		Steps Total - 6 <b>Pass - 0</b> Fail - 3 Skip - 3	
/ 6:05:24.368 pm // 6:05:30.407 pm /					



## User To Test Search Bar Function

<b>FAILED</b>	<b>DURATION - 6.038 s</b>		Steps Total - 2 <b>Pass - 0</b> Fail - 1 Skip - 1	
/ 6:05:24.369 pm // 6:05:30.407 pm /				
Using IOS 1				
@Test1				

#	Step / Hook Details	Status	Duration
1	<p>Given I launch the Mobile Simulator "Android Device 1"</p> <p>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f9fc:6e6e:f1b6:fd50%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepad.MainAc..., appium:appPackage: com.atomczak.notepad, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:automationName: uiautomator2, appium:deviceName: Pixel 8, appium:fullReset: false, appium:language: en, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, appium:noSign: false, appium:orientation: PORTRAIT, appium:platformVersion: 13, appium:skipDeviceInitialization: true, appium:skipServerInstallation: false, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 30000000, appium:uiautomator2ServerReadTimeout: 30000000, platformName: ANDROID}]] Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepad.MainAc..., appium:appPackage: com.atomczak.notepad, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:automationName: uiautomator2, appium:deviceName: Pixel 8, appium:fullReset: false, appium:language: en, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, appium:noSign: false, appium:orientation: PORTRAIT, appium:platformVersion: 13, appium:skipDeviceInitialization: true, appium:skipServerInstallation: false, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 30000000, appium:uiautomator2ServerReadTimeout: 30000000, platformName: ANDROID} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114)</p>	<b>FAILED</b>	6.031 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61) at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270) at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:174) at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:91) at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:103) at io.appium.java_client.android.AndroidDriver.&lt;init&gt;(AndroidDriver.java:109) at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:98) at builds.actions.MobileActions.mobileSetup(MobileActions.java:25) at workDirectory.stepDefinitions.common.CommonStepDefinitions.launchTheMobileSimulator(CommonStepDefinitions.java:14) at ?.I launch the Mobile Simulator "Android Device 1"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/Test%20Features/Test.feature:5) * Not displayable characters are replaced by '?'. </pre>		
	<p>AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)</p> <pre> java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null at builds.actions.MobileActions.screenshot(MobileActions.java:118) at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30) </pre>	FAILED	0.000 s
2	When I type "covid" into searchbar	SKIPPED	0.000 s

### User To Test Search Bar Function



<b>FAILED</b>		<i>DURATION - 5.937 s</i>			<b>Steps</b> Total - 2 <b>Pass - 0</b> <b>Fail - 1</b> Skip - 1		
/ 6:05:24.370 pm // 6:05:30.307 pm /							
<i>Using IOS 1</i>							
@Test1							

#	Step / Hook Details	Status	Duration
1	<p>Given I launch the Mobile Simulator "Android Device 1"</p> <pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: 'POST /orientation' cannot be proxied to UiAutomator2 server because the </pre>	FAILED	5.932 s



#	Step / Hook Details	Status	Duration
	<p>instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f9fc:6e6e:f1b6:fd50%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepat.MainAc..., appium:appPackage: com.atomczak.notepat, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:automationName: uiautomator2, appium:deviceName: Pixel 8, appium:fullReset: false, appium:language: en, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, appium:noSign: false, appium:orientation: PORTRAIT, appium:platformVersion: 13, appium:skipDeviceInitialization: true, appium:skipServerInstallation: false, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 30000000, appium:uiautomator2ServerReadTimeout: 30000000, platformName: ANDROID}]] Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepat.MainAc..., appium:appPackage: com.atomczak.notepat, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:automationName: uiautomator2, appium:deviceName: Pixel 8, appium:fullReset: false, appium:language: en, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, appium:noSign: false, appium:orientation: PORTRAIT, appium:platformVersion: 13, appium:skipDeviceInitialization: true, appium:skipServerInstallation: false, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 30000000, appium:uiautomator2ServerReadTimeout: 30000000, platformName: ANDROID}</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114)  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75)  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61)  at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176)  at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)  at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270)  at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:174)  at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:91)  at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:103)  at io.appium.java_client.android.AndroidDriver.&lt;init&gt;(AndroidDriver.java:109)  at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:98)  at builds.actions.MobileActions.mobileSetup(MobileActions.java:25)  at workDirectory.stepDefinitions.common.CommonStepDefinitions.launchTheMobileSimulator(CommonStepDefinitions.java:14)  at ?.I launch the Mobile Simulator "Android Device 1"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/Test%20Features/Test.feature:5)  * Not displayable characters are replaced by '?'. </p>		
	<p>AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)</p> <p>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null  at builds.actions.MobileActions.screenshot(MobileActions.java:118)  at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)</p>	FAILED	0.001 s
2	When I type "covid" into searchbar	SKIPPED	0.000 s

## User To Test Search Bar Function

<div>FAILED</div> <div>DURATION - 5.855 s</div>		<div></div>	<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div>	<div></div>
<div>/ 6:05:24.370 pm // 6:05:30.225 pm /</div>				
<div>Using IOS 1</div>				
<div>@Test1</div>				

#	Step / Hook Details	Status	Duration
1	<p>Given I launch the Mobile Simulator "Android Device 1"</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 404. Message: The session identified by 62502f43-f507-4383-a0d8-5d25c512f71b is not known Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f9fc:6e6e:f1b6:fd50%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepat.MainAc..., appium:appPackage: com.atomczak.notepat, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:automationName: uiautomator2, appium:deviceName: Pixel 8, appium:fullReset: false, appium:language: en, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, appium:noSign: false, appium:orientation: PORTRAIT, appium:platformVersion: 13, appium:skipDeviceInitialization: true, appium:skipServerInstallation: false, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 30000000, appium:uiautomator2ServerReadTimeout: 30000000, platformName: ANDROID}}]] Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepat.MainAc..., appium:appPackage: com.atomczak.notepat, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:automationName: uiautomator2, appium:deviceName: Pixel 8, appium:fullReset: false, appium:language: en, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, appium:noSign: false, appium:orientation: PORTRAIT, appium:platformVersion: 13, appium:skipDeviceInitialization: true, appium:skipServerInstallation: false, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 30000000, appium:uiautomator2ServerReadTimeout: 30000000, platformName: ANDROID}     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114)     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75)     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61)     at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176)     at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)     at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270)     at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:174)     at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:91)     at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:103)     at io.appium.java_client.android.AndroidDriver.&lt;init&gt;(AndroidDriver.java:109)     at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:98)     at builds.actions.MobileActions.mobileSetup(MobileActions.java:25)     at workDirectory.stepDefinitions.common.CommonStepDefinitions.launchTheMobileSimulator(CommonStepDefinitions.java:14)     at ?.I launch the Mobile Simulator "Android Device 1"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/</pre>	FAILED	5.847 s

#	Step / Hook Details	Status	Duration
	Test%20Features/Test.feature:5) * Not displayable characters are replaced by '?'. AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)		
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null at builds.actions.MobileActions.screenshot(MobileActions.java:118) at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)	FAILED	0.001 s
2	When I type "covid" into searchbar	SKIPPED	0.000 s