
# **Cucumber Report**

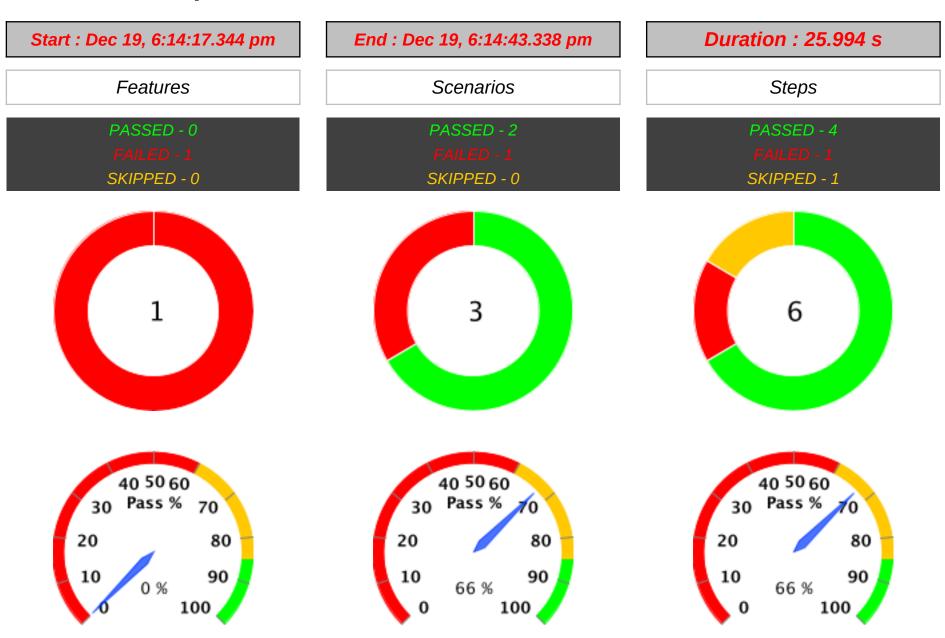


Feature			Scer	nario		Step			
Name	Duration	T	P	F	S	T	P	F	S
Using IOS 1	25.994 s	3	2	1	0	6	4	1	1


FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	Using IOS 1	<u>User To Test Search Bar Function</u>

TAG		Scei	nario	o Feature				
Name	T	P	F	S	T	P	F	S
@Test1	3	2	1	0	1	0	1	0

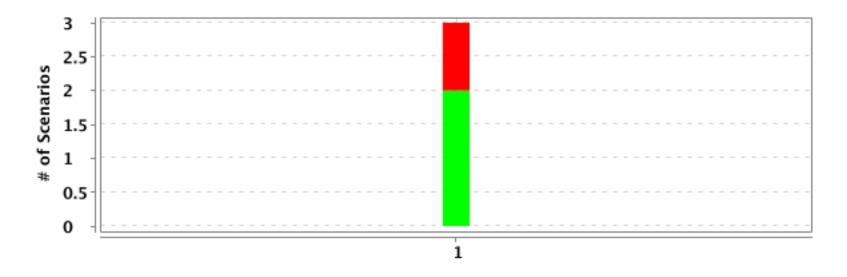


1	#	Feature Name	T	P	F	S	Duration
-	1	Using IOS 1	3	2	1	0	25.994 s

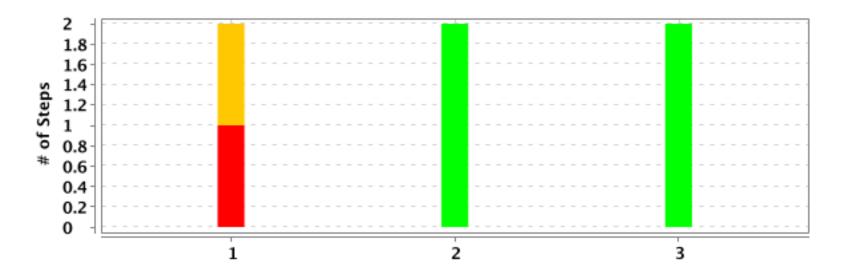


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Using IOS 1	User To Test Search Bar Function	2	0	1	1	25.993 s
2		User To Test Search Bar Function	2	2	0	0	11.907 s
3		User To Test Search Bar Function	2	2	0	0	10.563 s

DETAILED SECTION -- 7 --

## **Using IOS 1**

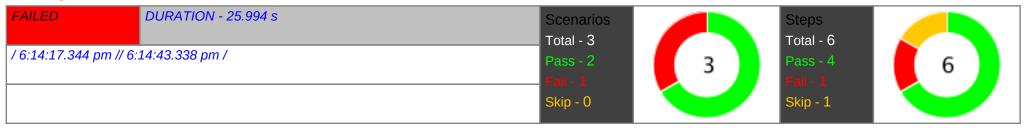


#### **User To Test Search Bar Function**

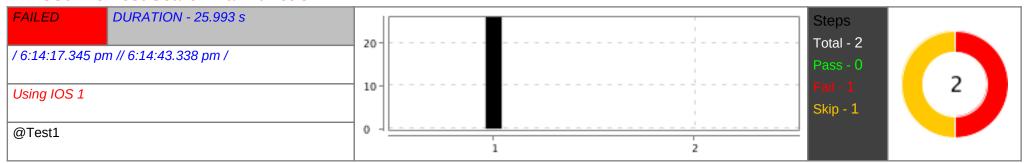

#	Step / Hook Details	Status	Duration
1	Given I launch the Mobile Simulator "Android Device 1"	FAILED	25.983 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: Error executing adbExec. Original error: 'Command '/Users/ 00131018amirulhakim/Library/Android/sdk/platform-tools/adb -P 5037 -s emulator-5554 install -rno-incremental /Users/00131018amirulhakim/.appium/node_modules/appium-uiautomator2-driver/node_modules/appium-uiautomator2-server/apks/appium-uiautomator2-server-debug-androidTest.apk' timed out after 20000ms. Try to increase the 20000ms adb execution timeout represented by 'uiautomator2ServerInstallTimeout' capability Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f9fc:6e6e:f1b6:fd50%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.61.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession (capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/, appium:appActivity: com.atomczak.notepat.MainAc, appium:appPackage: com.atomczak.notepat, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:language: en, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, appium:noSign: false, appium:orientation: PorTRAIT, appium:platformVersion: 13, appium:skipDeviceInitialization: true, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:app-Activity: com.atomczak.notepat.MainAc, appium:appPackage: com. atomczak.notepat, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:appium:automator2, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:appium:automator3, appium:appPackage: com. atomczak.notepat, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:autoGrantPermissions: true, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, app		

#	Step / Hook Details	Status	Duration
	appium:uiautomator2ServerLaunchTimeout: 30000000, appium:uiautomator2ServerReadTimeout: 30000000, platformName: ANDROID}		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61)		
	at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176)		
	at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)		
	at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:174)</init>		
	at io.appium.java_client.AppiumDriver. <init>(AppiumDriver.java:91)</init>		
	at io.appium.java_client.AppiumDriver. <init>(AppiumDriver.java:103)</init>		
	at io.appium.java_client.android.AndroidDriver. <init>(AndroidDriver.java:109)</init>		
	at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:98)		
	at builds.actions.MobileActions.mobileSetup(MobileActions.java:25)		
	at workDirectory.stepDefinitions.common.CommonStepDefinitions.launchTheMobileSimulator(CommonStepDefinitions.java:14)		
	at ?.I launch the Mobile Simulator "Android Device 1"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/		
	Test%20Features/Test.feature:5)		
	* Not displayable characters are replaced by '?'.		
	AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null at builds.actions.MobileActions.screenshot(MobileActions.java:118)		
	at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)		
2	When I type "covid" into searchbar	SKIPPED	0.000 s


### **User To Test Search Bar Function**

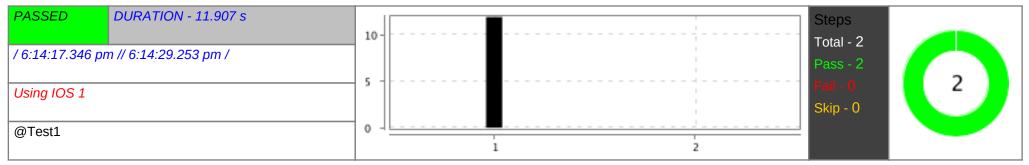

#	Step / Hook Details	Status	Duration
1	Given I launch the Mobile Simulator "Android Device 1"	PASSED	11.902 s

#	Step / Hook Details	Status	Duration
2	When I type "covid" into searchbar	PASSED	0.000 s

#### **User To Test Search Bar Function**

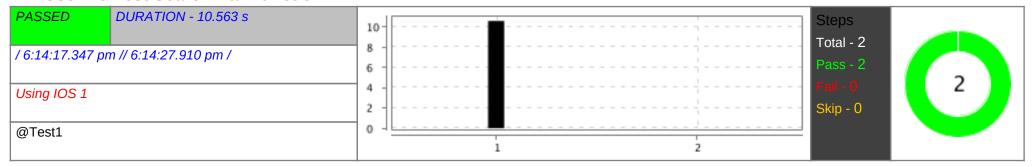

#	Step / Hook Details	Status	Duration
1	Given I launch the Mobile Simulator "Android Device 1"	PASSED	10.556 s
2	When I type "covid" into searchbar	PASSED	0.001 s