
Cucumber Report

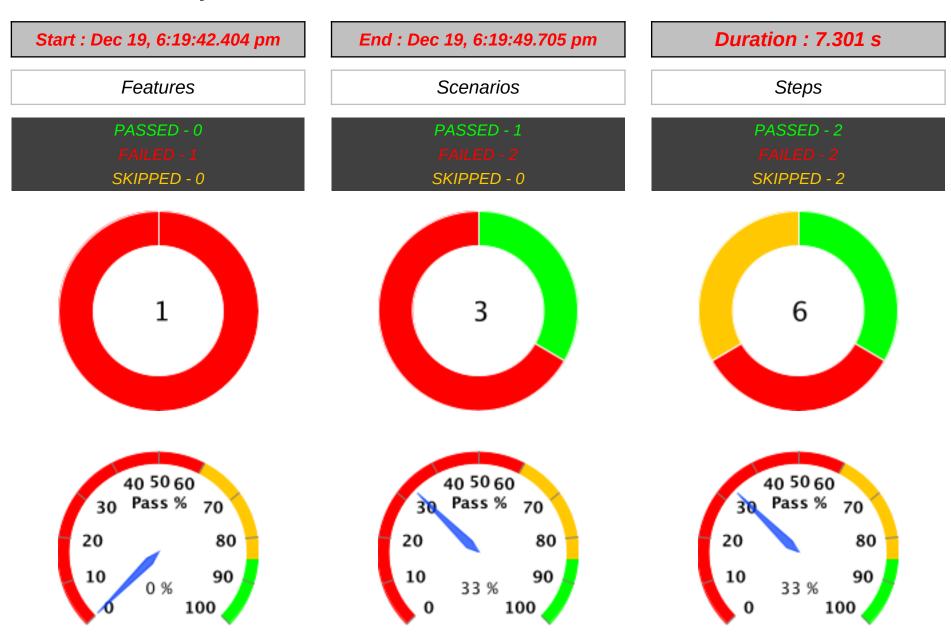

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Using IOS 1	7.301 s	3	1	2	0	6	2	2	2


FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	Using IOS 1	User To Test Search Bar Function
2		User To Test Search Bar Function


TAG		Scei	nario			Fea	ture	
Name	T	P	F	S	T	P	F	S
@Test1	3	1	2	0	1	0	1	0

FEATURES SUMMARY

-- 5 --

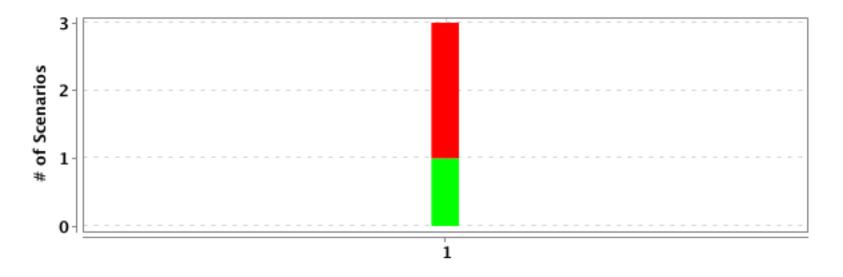

#	Feature Name	T	P	F	S	Duration
1	Using IOS 1	3	1	2	0	7.301 s

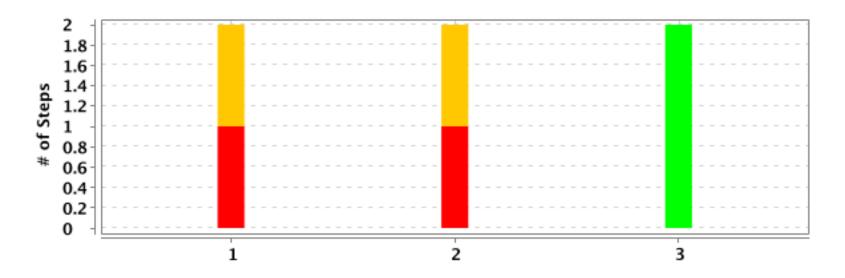


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Using IOS 1	User To Test Search Bar Function	2	0	1	1	7.268 s
2		User To Test Search Bar Function	2	0	1	1	7.155 s
3		User To Test Search Bar Function	2	2	0	0	7.298 s

DETAILED SECTION -- 7 --

Using IOS 1

Scenarios		Steps	
Total - 3		Total - 6	
Pass - 1	3	Pass - 2	6
Fail - 2		Fail - 2	🦶 ് 🆊
Skip - 0		Skip - 2	
	Total - 3 Pass - 1 Fail - 2	Total - 3 Pass - 1 Fail - 2	Total - 3 Pass - 1 Fail - 2 Total - 6 Pass - 2 Fail - 2


User To Test Search Bar Function

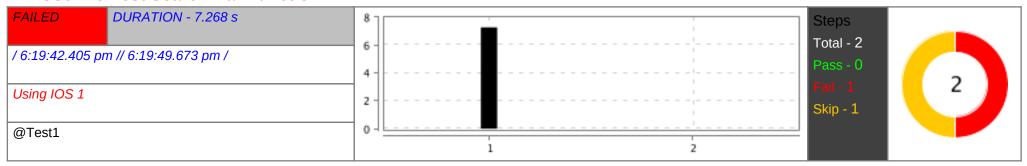

#	Step / Hook Details	Status	Duration
1	Given I launch the Mobile Simulator "Android Device 1"	FAILED	7.261 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 404. Message: The session identified by b26c35c1-4ee4-4913-bd1d-08e856f33bad is not known. Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f9fc:6e6e:f1b6:fd50%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:appi./Users/00131018amirulhakim/, appium:appia, appium:acak.notepat.MainAc, appium:appPackage: com.atomczak.notepat, appium:autoAcceptAlerts: true, appium:autoDismissAlerts: true, appium:automationName: uiautomator2, appium:deviceName: Pixel 8, appium:fullReset: false, appium:language: en, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, appium:noSign: true, appium:orientation: PORTRAIT, appium:platformVersion: 13, appium:skipDeviceInitialization: true, appium:skipServerInstallation: true, appium:uiautomator2ServerLaunchTimeout: 30000000, appium:uiautomator2ServerReadTimeout: 30000000, platformName: ANDROID}}]] Capabilities {appium:appi./Users/00131018amirulhakim/, appium:appActivity: com.atomczak.notepat.MainAc, appium:appPackage: com. atomczak.notepat, appium:autoAcceptAlerts: true, appium:atoDismissAlerts: true, appium:atoGrantPermissions: true, appium:appium:automatonName: uiautomator2, appium:deviceName: Pixel 8, appium:fullReset: false, appium:language: en, appium:locale: MY, appium:newCommandTimeout: 30000, appium:noReset: true, appium:noSign: true, appium:orientation: PORTRAIT, appium:platformVersion: 13, appium:skipDeviceInitialization: true, appium:noReset: true, appium:uiautomator-5554, appium:uiautomator-25erverLaunchTimeout: 30000000, appium:uiautomator-25erverReadTimeout: 30000000, platformName: ANDROID} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61)		
	at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176)		
	at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)		
	at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:174)</init>		
	at io.appium.java_client.AppiumDriver. <init>(AppiumDriver.java:91)</init>		
	at io.appium.java_client.AppiumDriver. <init>(AppiumDriver.java:103)</init>		
	at io.appium.java_client.android.AndroidDriver. <init>(AndroidDriver.java:109)</init>		
	at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:98)		
	at builds.actions.MobileActions.mobileSetup(MobileActions.java:25)		
	at workDirectory.stepDefinitions.common.CommonStepDefinitions.launchTheMobileSimulator(CommonStepDefinitions.java:14)		
	at ?.I launch the Mobile Simulator "Android Device 1"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/		
	Test%20Features/Test.feature:5)		
	* Not displayable characters are replaced by '?'.		
	AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)	FAILED	0.000 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null		
	at builds.actions.MobileActions.screenshot(MobileActions.java:118)		
	at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)		
2	When I type "covid" into searchbar	SKIPPED	0.000 s

User To Test Search Bar Function

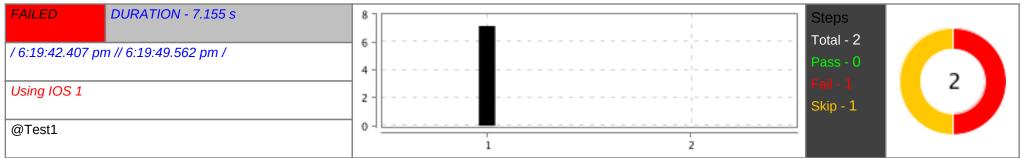


#	Step / Hook Details	Status	Duration
1	Given I launch the Mobile Simulator "Android Device 1"	FAILED	7.147 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 404. Message: The session identified by 31bc7f7c-6f1f-4842-855d-5a6ab5288857 is not known Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f9fc:6e6e:f1b6:fd50%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch:		

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
#	'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession (apabilities=[Capabilities {appium:app://users/00131018amirulhakim/, appium:appActivity: com.atomczak.notepat.MainAc, appium-appActivity: com.atomczak.notepat.MainAc, appium-appPackage: com.atomczak.notepat. Appium-autoAcceptAlerts: true, appium-siotsions: true, appium-automationName: uiautomator2, appium-deviceName: Pixel 8, appium-fullReset: false, appium-language: en, appium-locale: MY, appium.newCommandTimeout: 30000, appium-neReset: true, appium-noSign: true, appium-norientation: PORTRAIT, appium-platformVersion: 13, appium-sixbjDeviceIntialization: true, appium-sixbjDevrerIntialization: true, appium-appium-intialization: appium-intialization: true, appium-intialization: appium-intialization: true, appium-intialization: appium-intializati	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null at builds.actions.MobileActions.screenshot(MobileActions.java:118) at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)		
2	When I type "covid" into searchbar	SKIPPED	0.000 s

User To Test Search Bar Function

DETAILED SECTION -- 10 --

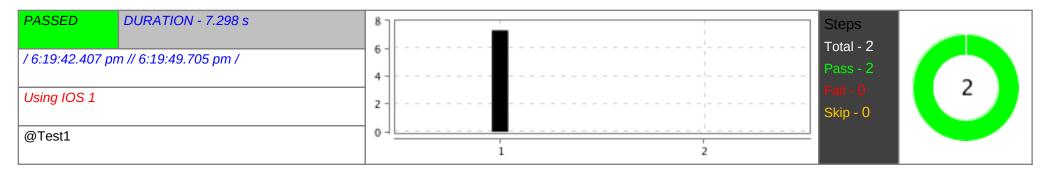

#	Step / Hook Details	Status	Duration
1	Given I launch the Mobile Simulator "Android Device 1"	PASSED	7.293 s
2	When I type "covid" into searchbar	PASSED	0.001 s